MECHANICAL LEGEND	
SYMBOL	DESCRIPTION
	DUCT WIDTH x DEPTH CLEAR INSIDE DIMENSION
	SUPPLY AIR DUCT SECTION UP - DOWN
	RETURN OR EXHAUST AIR DUCT SECTION UP - DOWN
	ROUND SUPPLY AIR DUCT SECTION UP - DOWN
	ROUND RETURN AIR DUCT SECTION UP - DOWN
V.D.	MANUAL VOLUME DAMPER
	SQUARE ELBOW W/TURNING VANES
DN	DROP IN DUCT (DIRECTION OF FLOW)
UP	RISE IN DUCT (DIRECTION OF FLOW)
	TAKE-OFF DAMPER/EXTRACTOR
	NEW CONSTRUCTION
G	GAS PIPE
	CONDENSATE DRAIN PIPE
	REFRIGERANT PIPE
	REDUCER
	UNION
	PIPE DOWN
	PIPE UP
	GAS PRESSURE REDUCING VALVE
	ISOLATION VALVE
	RECTANGULAR TO ROUND TRANSITION
	SUPPLY DIFFUSER
	SUPPLY GRILL
	EXHAUST GRILL
	RETURN GRILL
EXH	EXHAUST AIR
GR.	GRILLE
AD	ACCESS DOOR OR PANEL
PRV	PRESSURE REDUCING VALVE
EF	EXHAUST FAN
V.D.	VOLUME DAMPER
V.I.F.	VERIFY IN FIELD
W.C.	WATER COLUMN
T	THERMOSTAT
A.F.F.	ABOVE FINISHED FLOOR
B.O.D.	BOTTOM OF DUCT
BTUH	BRITISH THERMAL UNITS PER HOUR
CD	CONDENSATE DRAIN
C.O.	CLEAN OUT
CFH	CUBIC FEET PER HOUR
CFM	CUBIC FEET PER MINUTE
CLG.	COOLING
EL.	ELEVATION
FPM	FEET PER MINUTE
HP	HORSEPOWER
HTG.	HEATING
KW	KILOWATT
N.R.	NOT REQUIRED
N.T.S.	NOT TO SCALE
O.A.	OUTSIDE AIR
PSI	POUNDS PER SQUARE INCH
SQ. FT.	SQUARE FEET
AHU	AIR HANDLING UNIT
CEF	CEILING EXHAUST FAN
KEF	KITCHEN EXHAUST FAN

GENERAL NOTES

ALL WORK PERFORMED SHALL CONFORM WITH LOCAL CITY & STATE REGULATIONS. ALL WORK SHALL BE CONDUCTED, INSTALLED AND COMPLETED IN A WORKMANLIKE AND APPROVED MANNER SO AS TO SECURE THE RESULTS INTENDED BY THESE DOCUMENTS

ALL WORK IS TO BE FULLY COORDINATED WITH ALL OTHER TRADES.

CONTRACTOR IS RESPONSIBLE FOR IDENTIFYING AND INCLUDING ANY ITEMS NOT INDICATED ON THE DRAWINGS BUT NECESSARY FOR PROPER OPERATION OF MECHANICAL SYSTEM.

THE SEQUENCE FOR THE INSTALLATION OF ALL WORK SHALL BE COORDINATED BETWEEN ALL CONTRACTORS ON THE PROJECT & IN STRICT ACCORDANCE WITH ARCHITECT/ENGINEER & OWNER'S STIPULATION

THE CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES & SHALL MAKE NECESSARY OFF-SETS & CHANGES IN ELEVATIONS TO ACCOMMODATE OTHER TRADES & THE EXISTING CONDITIONS.

WHERE THERE IS EVIDENCE THAT WORK OF ONE TRADE WILL INTERFERE WITH WORK OF OTHER TRADES, ALL TRADES SHALL MEET ON JOB SITE TO WORK OUT SPACE CONDITIONS & MAKE SATISFACTORY ADJUSTMENTS TO INSTALLATION OF THE NEW WORK. CONTRACTORS SHALL VERIFY EXACT LOCATIONS OF ALL DEVICES & EQUIPMENT WITH FIELD CONDITIONS, SHOP DRAWINGS, & WORK OF OTHER TRADES PRIOR TO ROUGH IN. EACH CONTRACTOR SHALL BE RESPONSIBLE, AT THEIR OWN EXPENSE, FOR THE REMOVAL & REINSTALLATION OF ANY PART OF THEIR WORK IF SAME WAS INSTALLED WITHOUT CONSULTING WITH OTHER TRADES BEFORE INSTALLING THEIR WORK.

ALL EQUIPMENT AND MATERIALS SHALL BE U.L. LISTED.

CONTRACTOR SHALL SECURE AND PAY FOR ALL PERMITS AND FEES REQUIRED FOR THEIR WORK.

CONTRACTOR SHALL REFER TO THE ARCHITECTURAL & STRUCTURAL CONTRACT DRAWINGS (BEFORE SUBMITTING THEIR BIDS) TO FAMILIARIZE THEMSELVES WITH THE EXTENT OF THE GENERAL CONTRACTORS WORK, CEILING HEIGHTS AND CLEARANCE FOR INSTALLING THEIR WORK

INCLUDE ALL OVERTIME NECESSARY TO MAINTAIN JOB SCHEDULE UNDER NORMAL CONDITIONS OR DUE TO THIS CONTRACTOR'S NEGLIGENCE OR INABILITY TO PROPERLY STAFF THE PROJECT.

CONTRACTORS MUST KEEP UP WITH THE PROGRESS OF THE JOB.

ALL MAJOR PIECES OF MECHANICAL EQUIPMENT SHALL BE STARTED AND ADJUSTED AND PUT INTO OPERATION BY A FACTORY REPRESENTATIVE. ALL EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTIONS.

PRIOR TO BID, IF THE CONTRACTOR FINDS ANY DISCREPANCIES OR OMISSIONS IN THE PROJECT DOCUMENTS, THE CONTRACTOR IS TO NOTIFY THE ENGINEER IN WRITING & OBTAIN CLARIFICATION. ADDITIONAL COMPENSATION WILL NOT BE GRANTED AFTER AWARD OF CONTRACT FOR ANY ADDITIONAL WORK REQUIRED TO COMPLY WITH THESE DOCUMENTS.

ALL CHANGE PROPOSAL REQUESTS FOR WORK ADDITIONAL TO THE BASE BID CONTRACT SHALL BE BASED ON MATERIAL, LABOR, OVERHEAD AND PROFIT AS PUBLISHED IN THE LATEST EDITION OF "MEANS MECHANICAL, ELECTRICAL, PLUMBING AND BUILDING CONSTRUCTION COST DATA. "ALL CHANGE REQUESTS MUST BE BROKEN DOWN IN THE FOLLOWING MANOR.
MATERIAL COST: (IE. EQUIPMENT, SHEET METAL PER POUND AND PIPING PER LINEAL FOOT/FITTING)
LABOR COST: (NUMBER OF HOURS AT CURRENT LABOR RATE PER HOUR)
OVERHEAD & PROFIT: (INDICATING PERCENTAGES)
TOTAL CHANGE ORDER PRICE: (MATERIAL + LABOR + O&P)
PRICING FOR ALL ITEMS OF WORK WHICH ARE TO BE CREDITED TO THE PROJECT SHALL BE BROKEN DOWN IN A SIMILAR MANOR TO THE ADDED COSTS.

THE ASSOCIATED COST FOR DRAFTING CHANGES (INCLUDING THREE DIMENSIONAL MODELING) SHALL NOT EXCEED 10% OF THE COST OF MATERIAL AND LABOR FOR THE CHANGE

ALL CUTTING AND PATCHING THAT IS REQUIRED TO COMPLETE THE WORK SHALL BE THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR.

THE CONTRACTOR IS TO PROVIDE ALL LINTELS, SUPPORT STEEL AND FRAMING THAT IS REQUIRED TO COMPLETE THE WORK.

CONTRACTOR SHALL PROVIDE SLEEVES IN BEAMS, FLOORS, AND COLUMNS AND WALLS AS SHOWN ON DRAWINGS, AS REQUIRED BY JOB SITE CONDITIONS, AND/OR SPECIFIED, WHEN INSTALLING THEIR WORK. ALL BEAMS AND COLUMNS WHICH ARE REQUIRED TO BE SLEEVED SHALL BE CUT AND REINFORCED AS REQUIRED BY FIELD CONDITIONS AND LOCATIONS AND SIZES SHALL BE CHECKED AND APPROVED BY ARCHITECTS BEFORE CONTRACTOR CUTS ANY STRUCTURAL BUILDING MEMBER.

PROVIDE ALL COORDINATION AND MISCELLANEOUS IRON NECESSARY FOR SUITABLE ANCHORAGE OF HVAC ITEMS AND EQUIPMENT.

CONTRACTOR IS TO INCLUDE ALL REQUIRED PREMIUM TIME IN BASE BID. INCLUDE ALL ESCALATION COSTS REQUIRED TO COMPLETE THE WORK.

PROVIDE FOR SAFETY AND PROTECTION OF CONTRACTOR'S OWN WORK, INCLUDING THE COVERING OF ANY HOLES, SHAFT OPENINGS, ETC., SO AS TO AVOID ANY UNNECESSARY SAFETY HAZARDS AS REQUIRED AND OUTLINED BY OSHA AND ALL APPLICABLE REGULATIONS.

PROVIDE DUST AND NOISE PROTECTION OF ADJOINING NON-CONSTRUCTION AREAS. PROPERLY PROTECT ALL FLOORS, ROOFS AND THE LIKE.

MECHANICAL EQUIPMENT & APPLIANCES SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR THE LABELED EQUIPMENT. CONNECTIONS TO THE MECHANICAL EQUIPMENT AND APPLIANCES, SUCH AS FUEL SUPPLY, CHIMNEY & DUCTS, SHALL CONFORM TO THE REQUIREMENTS OF THESE DOCUMENTS. MANUFACTURER'S INSTALLATION INSTRUCTIONS SHALL BE AVAILABLE ON THE JOBSITE AT ALL TIMES FOR INSPECTION.

THE DRAWINGS, SCHEDULES, & SPECIFICATIONS HAVE BEEN PREPARED USING ONE MANUFACTURER FOR EACH TYPES OF EQUIPMENT AS THE BASIS FOR DIMENSIONAL & MECHANICAL DESIGN. SUBSTITUTIONS FOR PRODUCTS WILL ONLY BE CONSIDERED IF SUBMITTED 10 DAYS PRIOR TO BID DATE & ONLY FOR PRODUCTS EQUAL OR BETTER THAN THAT SPECIFIED. THE CONTRACTOR SHALL BE RESPONSIBLE FOR CHECKING ALL THE DIMENSIONS OF THE EQUIPMENT TO VERIFY THAT IT WILL FIT IN THE SPACE SHOWN ON THE DRAWINGS. MINOR DEVIATIONS IN DIMENSIONS WILL BE PERMITTED; PROVIDED THE RATINGS MEET THOSE SHOWN ON THE DRAWINGS AND EQUIPMENT WILL PHYSICALLY FIT INTO THE SPACE ALLOCATED WITH SUITABLE ACCESS AROUND EQUIPMENT FOR OPERATION & MAINTENANCE ON THE EQUIPMENT.

THE MECHANICAL EQUIPMENT HAS BEEN COORDINATED WITH THE ELECTRICAL DESIGN DRAWINGS BASED ON THE ELECTRICAL CHARACTERISTICS OF THE EQUIPMENT SPECIFIED. ALL CHANGES AND/OR MODIFICATIONS TO THE ELECTRICAL DESIGN AND INSTALLATION EXPENSE, DUE TO SUBSTITUTIONS OF EQUIPMENT (I.E. AMPERAGE INCREASE) WILL BE THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR.

CONTRACTOR SHALL SUBMIT DETAILED DIMENSIONED SHOP DRAWINGS FOR ALL WORK WHICH MUST BE REVIEWED, COORDINATED & SIGNED OFF BY ALL OTHER TRADES BEFORE SUBMITTAL. IN PREPARATION OF SHOP DRAWINGS, CONTRACTOR MAY, AT HIS OPTION, OBTAIN ELECTRONIC DRAWING FILES IN AUTOCAD FORMAT ON A CD-ROM DISK FROM THE ENGINEER FOR SHIPPING & HANDLING FEE OF $150.00 PER REQUEST. CONTRACTOR SHALL CONTACT THE ARCHITECT & ENGINEER FOR WRITTEN AUTHORIZATION & NECESSARY RELEASE AUTHORIZATION FORM & TO SPECIFY SHIPPING METHOD. IN ADDITION TO PAYMENT, ARCHITECTS WRITTEN AUTHORIZATION & ENGINEERS RELEASE AGREEMENT FORM MUST BE RECEIVED BEFORE ELECTRONIC DRAWING FILES WILL BE SENT.

CONTRACTOR AND/OR MANUFACTURER SHALL VERIFY THAT THE CHARACTERISTICS OF THE EQUIPMENT HE SUBMITS FOR REVIEW MEETS THE CAPACITY AND DUTY SPECIFIED.

WHEN EQUIPMENT IS SUBMITTED FOR REVIEW AND DOES NOT MEET THE PHYSICAL SIZE OR ARRANGEMENT OF THAT SCHEDULED & SPECIFIED, CONTRACTOR SHALL PAY FOR ALL ALTERATIONS REQUIRED TO ACCOMMODATE SUCH EQUIPMENT AT NO ADDITIONAL COST TO OWNER. CONTRACTOR WILL ALSO PAY ALL COSTS FOR ADDITIONAL WORK REQUIRED BY OTHER CONTRACTORS, OWNER, ARCHITECT, OR ENGINEER TO MAKE CHANGE WHICH WOULD ALLOW THE EQUIPMENT TO FIT IN THE SPACE & FUNCTION AS INTENDED.

HVAC NOTES:

ALL EQUIPMENT, DUCTWORK, PIPEWORK, ETC SHALL BE SUPPORTED.

ALL DUCT SIZES SHOWN ARE INSIDE CLEAR DIMENSIONS.

ALL DUCTWORK AND PIPING IS SHOWN SCHEMATICALLY. PROVIDE ALL TRANSITIONS, TURNING VANES, ELBOWS, FITTINGS, ETC. TO ALLOW SMOOTH FLOWS. ALL SPLIT DUCT FITTINGS SHALL TRANSITION TO FULL SIZE OF THE SUM OF BOTH BRANCHES UPSTREAM OF SPLIT.

MAINTAIN A MINIMUM 6" CLEARANCE BETWEEN DUCTWORK, PIPING, EQUIPMENT, ETC. AND ALL FIRE RATED AND FIRE/SMOKE RATED PARTITIONS, TO ALLOW FOR INSPECTION OF RATED WALLS.

ALL EQUIPMENT SHALL BE CAPABLE OF FITTING INTO THE SPACES ALLOCATED WHILE MEETING THE MANUFACTURER'S RECOMMENDED ACCESS REQUIREMENTS. REVIEW ALL SPACES WHERE EQUIPMENT IS TO BE INSTALLED PRIOR TO ORDERING OF EQUIPMENT AND NOTIFY THE ENGINEER OF ANY INADEQUATE CLEARANCES OR CONDITIONS THAT WILL PREVENT THE PROPER INSTALLATION, MAINTENANCE, AND OPERATION OF THE EQUIPMENT.

SLEEVE AND SEAL ALL PIPING PENETRATIONS THROUGH BUILDING PARTITIONS.

VERIFY AND COORDINATE ALL ROOF, WALL, AND FLOOR PENETRATIONS WITH THE STRUCTURAL AND ARCHITECTURAL DRAWINGS PRIOR TO THE START OF CONSTRUCTION.

PROVIDE ACCESS PANELS TO ALL CONCEALED VALVES, DAMPERS, AND EQUIPMENT. PANELS SHALL BE MILCOR OR EQUAL. COORDINATE THE LOCATION OF ACCESS PANELS TO INSURE THAT THE EQUIPMENT CAN BE MAINTAINED ADEQUATELY.

INSTALL CONDENSATE DRAINS AT A MINIMUM SLOPE OF 1/4" PER FOOT. INDIVIDUAL UNIT CONDENSATE DRAINS SHALL BE 3/4" DIAMETER LINES AND 1" FOR COMBINED LINES UNLESS OTHERWISE INDICATED.

THE CONTRACTOR SHALL PROVIDE ALL CONTROL COMPONENTS AND ACCESSORIES INCLUDING EQUIPMENT MOTOR STARTERS, THERMOSTATS, SENSORS, WIRING, BOXES, ETC.

INSULATE ALL SEWER PIPING RECEIVING AIR CONDITIONING CONDENSATE DRAINS, OR ANY OTHER COLD LIQUID WHICH MAY CREATE CONDENSATION, FROM POINT OF CONNECTION TO TOP OF CONCRETE SLAB-ON-GRADE.

MOUNT ALL ROOM THERMOSTATS AT 4'-0" ABOVE FINISHED FLOOR UNLESS OTHERWISE INDICATED.

ALL HVAC SYSTEM THERMOSTATS IN UNITS SHALL BE EQUIPPED WITH ENERGY STAR SEVEN DAY PROGRAMMABLE THERMOSTATS WITH NIGHT SETBACK.

PRIOR TO PERMIT BEING FINALED, A COMPLETE REPORT OF THE TESTING AND ADJUSTING SHALL BE PROVIDE TO THE OWNER/OWNER'S REPRESENTATIVE AND TO THE INSPECTOR.

HVAC SHEET INDEX

S.NO.	SHEET NO.	SHEET NAME	SCALE
1	HG-1	GENERAL NOTES & SYMBOL	N.T.S
2	H1.0	HVAC FLOOR PLAN	3/16" = 1'-0"
3	H2.0	HVAC ROOF PLAN	3/16" = 1'-0"
4	H3.0	HVAC PIPING PLAN	3/16" = 1'-0"
5	H4.0	GAS RISER DIAGRAM	N.T.S
6	H5.0	HVAC SHCEDULES	N.T.S
7	H6.0	HVAC DETAILS	N.T.S

REFERENCE CODES

1. BUILDING CODE OF THE TEXAS, ADOPTS THE IBC 2015 WITH AMENDMENTS.
2. EXISTING BUILDING CODE OF TEXAS, ADOPTS THE IEBC 2015 WITH AMENDMENTS.
3. PLUMBING CODE OF TEXAS, ADOPTS THE IPC 2015 WITH AMENDMENTS.
4. MECHANICAL CODE OF TEXAS, ADOPTS THE IMC 2015 WITH AMENDMENTS.
5. FUEL GAS CODE OF TEXAS, ADOPTS THE IFGC 2015 WITH AMENDMENTS.
6. ENERGY CONSERVATION CODE OF TEXAS, ADOPTS THE IECC 2015 WITH AMENDMENTS.
7. 2017 NATIONAL ELECTRICAL CODE (NEC).

EQUIPMENT IDENTIFICATION

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR
ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM : HQ
Author : MJ
Checker : MJ
Scale : N.T.S

SHEET TITLE

GENERAL NOTES & SYMBOL

SHEET NO.

HG-1

HVAC GENERAL NOTES

1. ALL DUCTWORK SHALL CONFORM TO SMACNA STANDARDS.ALL DUCTWORK SIZES ARE NET INSIDE DIMENSIONS.
2. MECHANICAL CONTRACTOR TO COORDINATE DUCT LAYOUT AND DIMENSIONS WITH FIELD VERIFIED.
3. ADJUST CEILING DIFFUSER TO FIT AS PER FIELD VERIFIED.
4. DIFFUSER TO BE INSTALLED WITH SYMMETRY IN ACCORDANCE WITH LIGHTING LAYOUT DESIGN. DIFFUSER SHALL NOT BE OFF CENTER OR ALIGNMENT.COORDINATE WITH ARCHITECT FOR APPROVAL.
5. COORDINATE WITH GENERAL CONTRACTOR FOR ALL CONDENSATE DRAIN LINE LOCATION.
6. DUCT WORK SHALL BE INSULATED WITH R-6 FIBERGLASS DUCT WRAP WITH FSK JACKET.

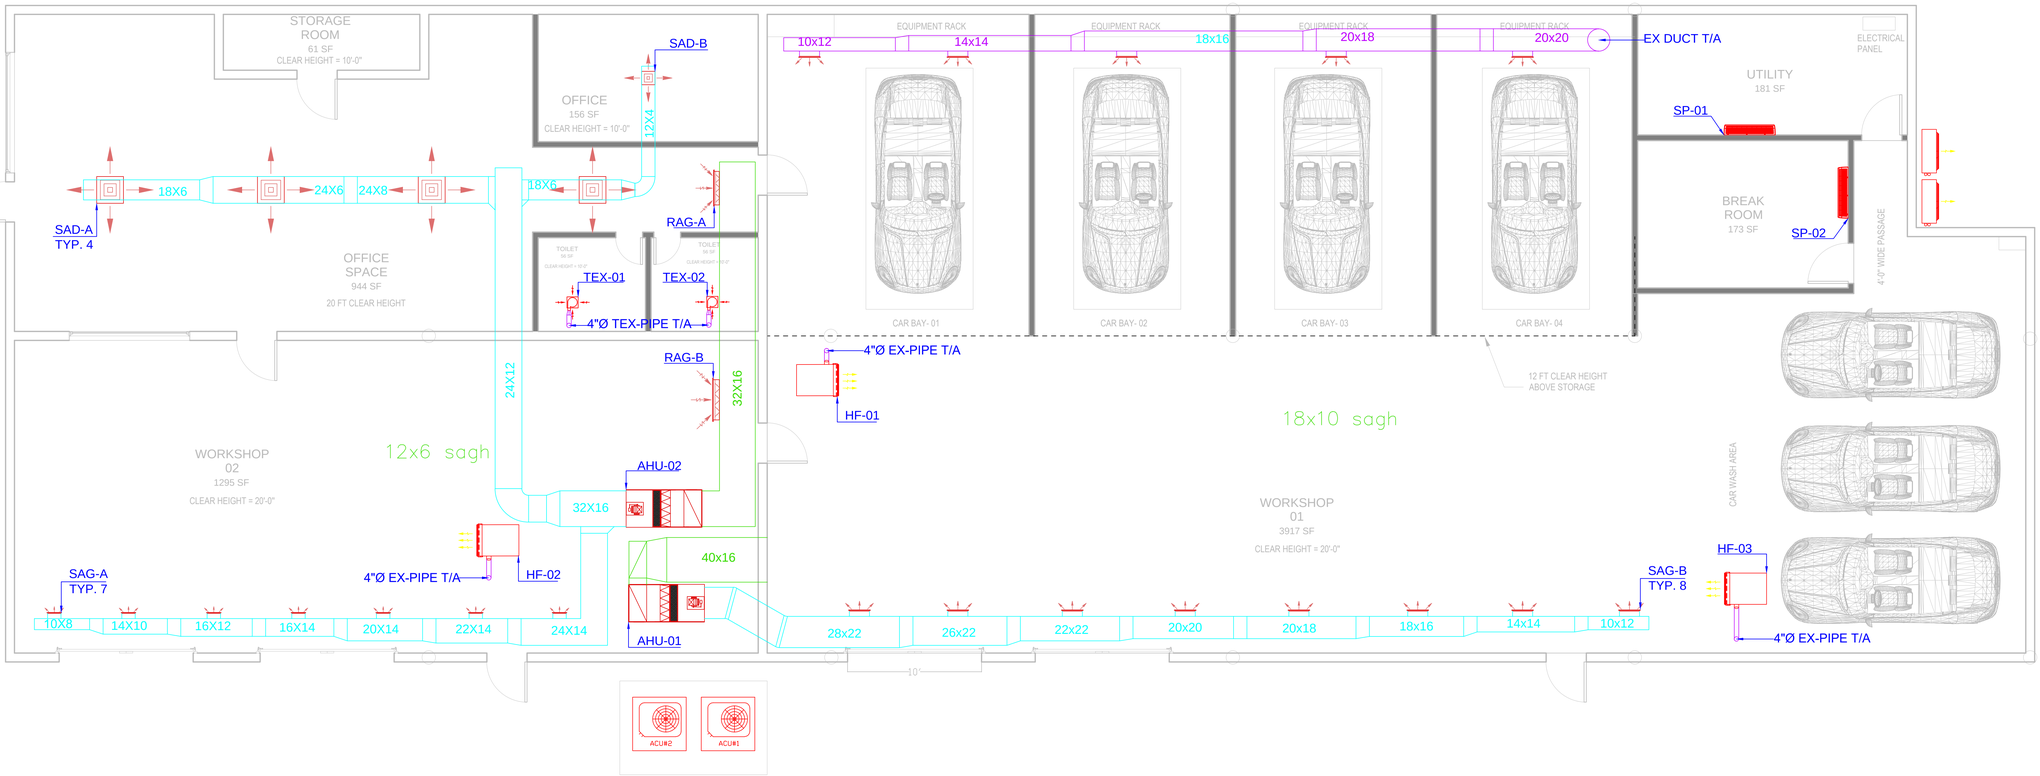

1 A101 LEVEL 1 PROPOSED PLAN
SCALE: 3/16" = 1'-0"

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM	:	SS
Author	:	SB
Checker	:	AJ
Scale	:	3/16" = 1'-0"

SHEET TITLE

HVAC FLOOR PLAN

SHEET NO.

H1.0

HVAC GENERAL NOTES

1. ALL DUCTWORK SHALL CONFORM TO SMACNA STANDARDS.ALL DUCTWORK SIZES ARE NET INSIDE DIMENSIONS.
2. MECHANICAL CONTRACTOR TO COORDINATE DUCT LAYOUT AND DIMENSIONS WITH FIELD VERIFIED.
3. ADJUST CEILING DIFFUSER TO FIT AS PER FIELD VERIFIED.
4. DIFFUSER TO BE INSTALLED WITH SYMMETRY IN ACCORDANCE WITH LIGHTING LAYOUT DESIGN. DIFFUSER SHALL NOT BE OFF CENTER OR ALIGNMENT.COORDINATE WITH ARCHITECT FOR APPROVAL.
5. COORDINATE WITH GENERAL CONTRACTOR FOR ALL CONDENSATE DRAIN LINE LOCATION.
6. DUCT WORK SHALL BE INSULATED WITH R-6 FIBERGLASS DUCT WRAP WITH FSK JACKET.

1 A101 HVAC ROOF PROPOSED PLAN
SCALE: 3/16" = 1'-0"

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM	:	SS
Author	:	SB
Checker	:	AJ
Scale	:	3/16" = 1'-0"

SHEET TITLE

HVAC ROOF PLAN

SHEET NO.

H2.0

HVAC FLOOR PLAN KEYNOTES:

1. REFRIGERATION PIPING SHALL BE COPPER ASTM B-280 ACR TUBING. WITH INSULATION.
2. 1"Ø INSULATION CONDENSATE DRAIN PIPE. (PIPE MATERIAL PVC)
3. INCOMING GAS SERVICE BY GAS UTILITY COMPANY.
4. BY PLUMBING CONTRACTOR.
5. BY GAS UTILITY COMPANY.
6. TERMINATE CONDENSATE DRAIN PIPE TO LAVATORY SINK DRAIN.
7. TERMINATE CONDENSATE DRAIN PIPE AT DRY WELL WITH INDIRECT CONNECTION.PLEASE REFER SHEET: H3.0 DETAIL NO:04
8. REFRIGERATION PIPING FROM MUA-1.
9. 1"Ø INSULATION CONDENSATE DRAIN PIPE. FROM MUA-1

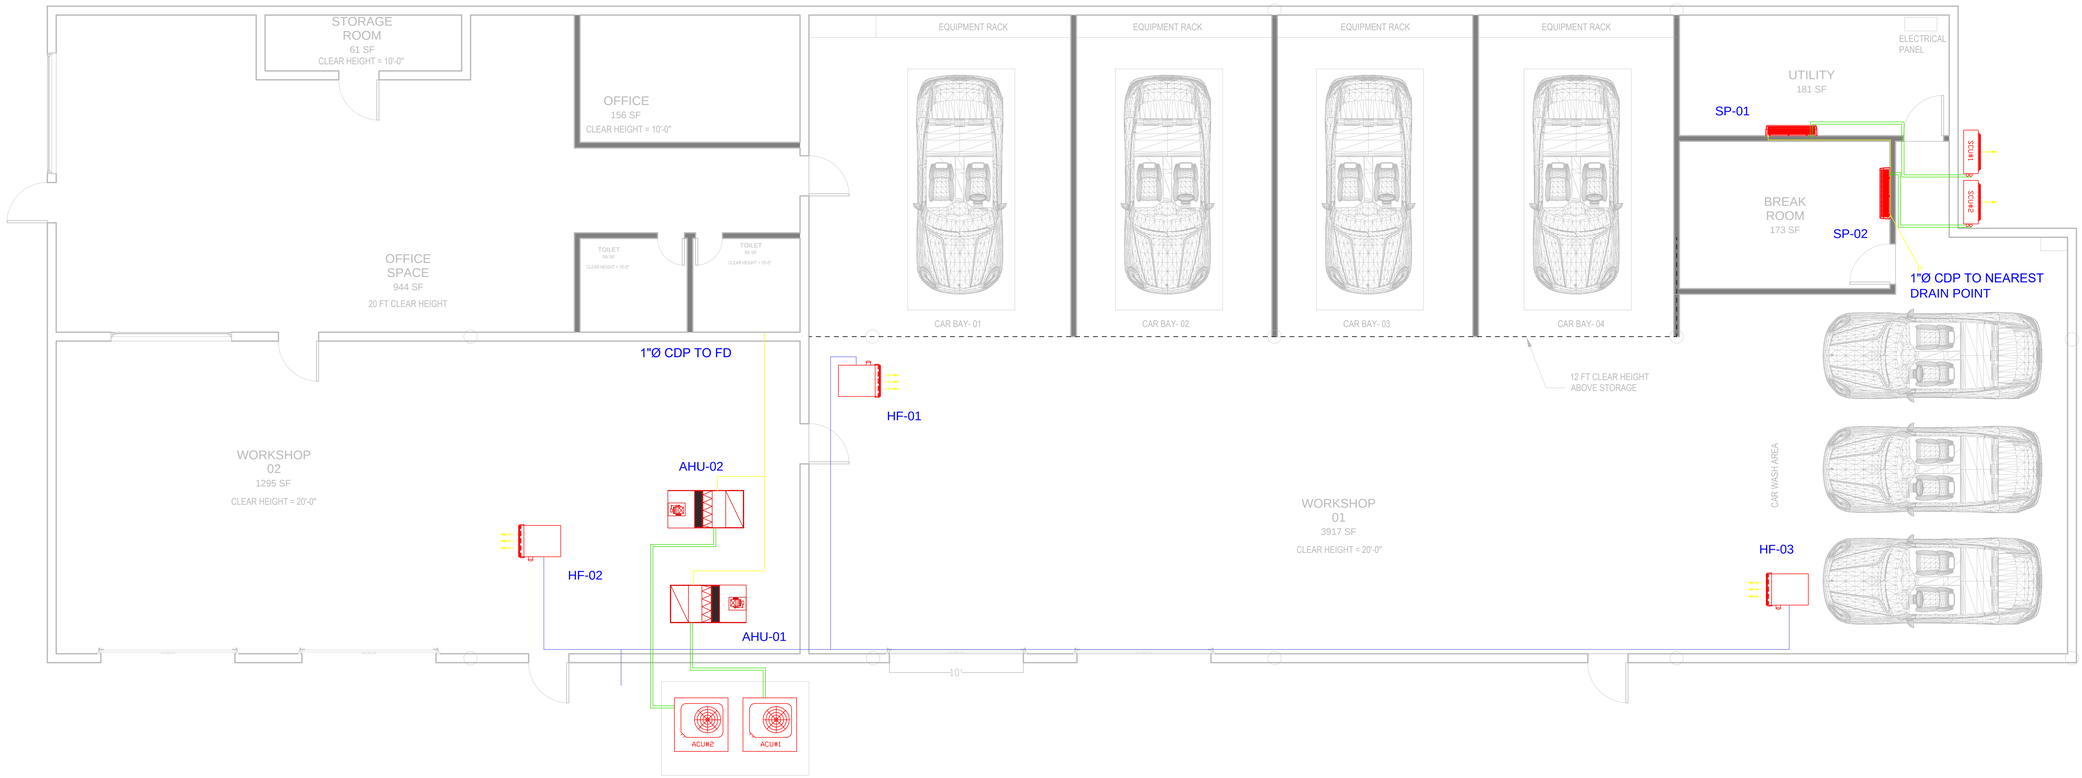

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM	:	SS
Author	:	SB
Checker	:	AJ
Scale	:	3/16" = 1'-0"

SHEET TITLE

HVAC PIPING PLAN

SHEET NO.

H3.0

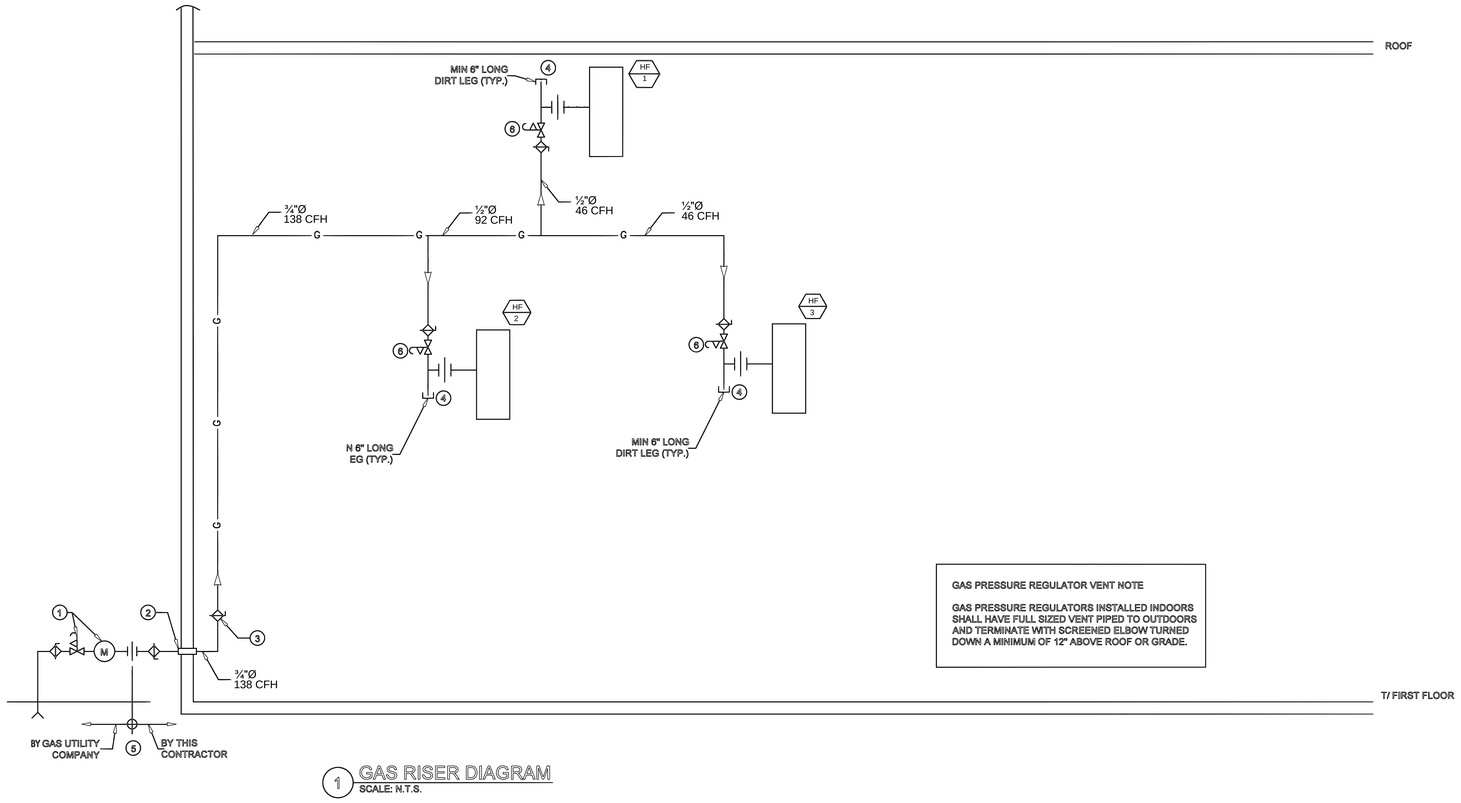

1 GAS RISER DIAGRAM
SCALE: N.T.S.

GAS PRESSURE REGULATOR VENT NOTE

GAS PRESSURE REGULATORS INSTALLED INDOORS SHALL HAVE FULL SIZED VENT PIPED TO OUTDOORS AND TERMINATE WITH SCREENED ELBOW TURNED DOWN A MINIMUM OF 12" ABOVE ROOF OR GRADE.

KEY NOTES:

1. INCOMING GAS SERVICE, PRESSURE REGULATOR, AND METER BY GAS UTILITY COMPANY TO DELIVER INDICATED GAS FLOW RATE @ 2.0 PSI DOWNSTREAM OF PRESSURE REGULATOR AND METER.
2. ENTER BUILDING APPROXIMATELY 2'-5" TO 3'-0" ABOVE FINISHED FLOOR (V.I.F.) WITH PIPE SLEEVE THROUGH EXTERIOR WALL.
3. SHUT-OFF VALVE IN RISER AT 5'-0" ABOVE FINISHED FLOOR WITH VALVE TAG "BUILDING NATURAL GAS MAIN SHUT-OFF VALVE".
4. MAKE FULL SIZE CONNECTION TO GAS FIRED EQUIPMENT WITH MINIMUM 6" LONG DIRT LEG.
5. METER IS LOCATED IN THE CLUSTER OF METERS IN THE SOUTH SIDE OF BUILDING FIELD VERIFY.

GAS PIPING NOTES

1. 2 INCHES AND UNDER: SCHEDULE 40, BLACK, ASTM A53, GRADE A, SEAMLESS OR LAP WELDED. FITTINGS: STANDARD WEIGHT, BLACK STEEL THREADED WITH MALLEABLE FITTINGS.
2. OVER 2 INCHES: SCHEDULE 40, BLACK, ASTM A53, GRADE A, SEAMLESS OR LAP WELDED. FITTINGS: STANDARD WEIGHT, BLACK STEEL BUTT WELDING. JOINTS: FLANGED OR WELDED, RAISED FACE 150 I.B.
3. ALL GAS PIPING AND FITTINGS SHALL BEAR THE MANUFACTURERS' IDENTIFICATION AND BE LISTED BY A THIRD PARTY CERTIFICATION AGENCY.
4. OUTSIDE PIPING, FITTINGS, AND VALVES SHALL HAVE ONE COAT PRIMER AND ONE FINISH COAT YELLOW.
5. GAS COCKS TO BE SUITABLE FOR GAS SERVICE.
6. INTERIOR GAS PIPING SHALL NOT RUN IN OR THROUGH AN AIR DUCT, CLOTHES CHUTE, CHIMNEY OR VENT, VENTILATING DUCT, DUMBWAITER, ELEVATOR SHAFT, OR CONCEALED PLENUM.
7. PIPING SHALL NOT BE LOCATED IN SOLID PARTITIONS OR SOLID WALLS, UNLESS INSTALLED IN A CHASE OR CASING.
8. PIPING INSTALLED IN CONCEALED LOCATIONS SHALL BE WELDED.
9. PIPING SHALL NOT BE USED AS A GROUNDING ELECTRODE.
10. PIPING INSTALLED THROUGH A MASONRY WALL SHALL BE ENCASED IN A SLEEVE. THE SLEEVE SHALL BE SEALED AT THE OUTSIDE OF THE FOUNDATION WALL TO PREVENT ENTRY OF WATER. GAS PIPING SHALL NOT PENETRATE A BUILDING FOUNDATION WALL BELOW GRADE.
11. PROVIDE PIPE SUPPORT FOR ROOFTOP GAS PIPING. PIPE SUPPORT SHALL BE AS MANUFACTURED BY MIRO INDUSTRIES. MAINTAIN MAXIMUM LOAD WEIGHT AND SPACING AS RECOMMENDED BY MANUFACTURER.
12. GAS PRESSURE REGULATORS THAT REQUIRE A VENT SHALL HAVE AN INDEPENDENT VENT TO THE OUTSIDE OF THE BUILDING. THE VENT SHALL BE TERMINATED SO AS TO PREVENT THE ENTRY OF WATER OR FOREIGN OBJECTS.
13. SCHEDULE 40 METALLIC GAS PIPE SIZED FOR CONSIDERING 2 PSI AND 0.5 IN W.C PRESSURE DROP..

GAS CONSUMPTION SHCEDULE 40 METALLIC PIPE REFER TABLE 402.4 (2) FROM INTERNATIONAL FUEL GAS CODE, 2015

DESCRIPTION	MANUFACTURER	MODEL	QTY.	CFH	TOTAL LENGTH
UNIT HEATER-1	REZNOR	UDZ-60	1	46	75
UNIT HEATER-2	REZNOR	UDZ-60	1	46	120
UNIT HEATER-3	REZNOR	UDZ-60	1	46	35
				138	

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR
ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM : SS
Author : SB
Checker : AJ
Scale : N.T.S

SHEET TITLE

GAS RISER DIAGRAM

SHEET NO.

H4.0

AIR DEVICES SCHEDULE

TYPE	USAGE	SERVING	NECK SIZE	FACE SIZE	MATERIAL	DESCRIPTION	MANUFACTURER
SAD–B	SUPPLY	OFFICE	6"ø	12"X12"	ALUMINIUM	SQUARE DIFFUSER	TUTTLE & BAILEY
SAD–A	SUPPLY	OFFICE SPACE	10"ø	24"X24"	ALUMINIUM	SQUARE DIFFUSER	TUTTLE & BAILEY
SAG–A	SUPPLY	WORKSHOP–1	12"X6"	14"X8"	ALUMINIUM	35° DEFLECTION GRILLE	TUTTLE & BAILEY
SAG–B	SUPPLY	WORKSHOP–2	18"X10"	20"X12"	ALUMINIUM	35° DEFLECTION GRILLE	TUTTLE & BAILEY
RAG–A	RETURN	OFFICE SPACE	30"X12"	32"X14"	STEEL	35° DEFLECTION GRILLE	TUTTLE & BAILEY
RAG–B	RETURN	WORKSHOP–2	36"X18"	38"X20"	STEEL	35° DEFLECTION GRILLE	TUTTLE & BAILEY
EAG–E	EXHAUST	WORKSHOP–1	18"X10"	20"X12"	STEEL	GRILLE	TUTTLE & BAILEY

NOTES:
1. CUSTOM FINISH & COLOR AS SELECTED BY ARCHITECT/OWNER.
2. PROVIDE OPPOSED BLADE DAMPER.
3. PROVIDE FOAM GASKET SEAL.
4. COORDINATE FRAME TYPE WITH REFLECTED CEILING PLAN & ARCHITECT.
5. INSULATED PLENUM/BACK PAN.
6. ARCHITECT/OWNER SHALL SELECT SUPPLY DIFFUSER BASE ON DRYWALL CEILING .

AIR HANDLER SCHEDULE

SYMBOL	LOCATION	MOUNTING	FEED TO	QTY.	CAPACITY		OUTSIDE AIR(CFM)	FAN E.S.P	FILTER	DRAIN PIPE
					COOLING (MBH)	FLOW (CFM)				
AHU–2	WORKSHOP–2	CEILING SUSPENDED	WORKSHOP–2 OFFICE SPACE OFFICE	1	94.1	3870	196	1	MERV–13	1"ø
AHU–1	WORKSHOP–2	CEILING SUSPENDED	WORKSHOP–1	1	120	4998	237	0.8	MERV–13	1"ø

NOTES:
1. UNITS SHALL BE MOUNTED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTION.
2. THE VENT CONNECTOR IS IN PLACE, SLOPES UPWARD AND IS PHYSICALLY SOUND WITHOUT HOLES OR GAPS.
3. THE RETURN AIR DUCT CONNECTION IS PHYSICALLY SOUND, IS SEALED TO THE UNIT, AND TERMINATES OUTSIDE THE SPACE.
4. A MINIMUM OF 24" IN FRONT OF THE UNIT FOR SERVICE CLEARANCE IS REQUIRED & ALSO ADDITIONAL CLEARANCE ON ONE SIDE OR TOP WILL BE REQUIRED FOR ELECTRICAL WIRING CONNECTIONS.

SPLIT AIR CONDITIONING UNIT (INDOOR) SCHEDULE

SYMBOL	LOCATION	MOUNTING	FEED FROM	QTY.	CAPACITY		ENT. AIR		REFRIGERANT LINE			ELECTRIC DATA					WEIGHT (LBS.)	HSPF	MODEL	BASIS OF DESIGN
					COOLING MBH	HEATING MBH	DB (°F)	WB (°F)	TYPE	LIQUID	GAS	V	HZ.	PH.	FLA	MCA				
SP–1	UTLITY	WALL MOUNTED	CU–1	1	6	8.7	95	75	410A	3/8"	1/4"	208	60	1	0.67	1.0	29	12.5	NTXWPH06A112A	TRANE
SP–2	BREAK ROOM	WALL MOUNTED	CU–2	1	6	8.7	95	75	410A	3/8"	1/4"	208	60	1	0.67	1.0	29	12.5	NTXWPH06A112A	TRANE

NOTES:
1. INDOOR UNITS SHALL BE MOUNTED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTION.
2. CONDENSATE DRAIN LINE FROM INDDOR UNITS SHALL BE PIPED BY CONTRACTOR AS SHOWN ON PLANS.
3. REFRIGERANT PIPING SHALL RUN FROM INDDOR UNITS TO OUTDOOR UNIT AS PER MANUFACTURER'S INSTRUCTION.BOTH REFRIGERANT PIPING SHALLBE INSULATED.

HEAT PUMP UNIT SCHEDULE

SYMBOL	LOCATION	FEED TO	QTY.	RATED COOLING CAPACITY MBH	ENT. AIR DB (°F)	REFRIGERANT LINE			REFRIGERANT LINE					WEIGHT (LBS.)	SEER	DIMENSION DATA			COMPRESSOR DATA			MODEL	BASIS OF DESIGN
						TYPE	LIQUID	GAS	V	HZ.	PH.	MOCP	MCA			WIDTH	DEPTH	HEIGHT	TYPE	RLA	FAN QTY.		
CU–1	OUTSIDE	SPX–1	1	6	105	410A	3/8"	1/4"	208	60	1	15	11	81	33.1	31.5"	11.25"	21.6"	ROTARY	8.2	1	NTXSPH(B)06A112A	TRANE
CU–2	OUTSIDE	SPX–2	1	6	105	410A	3/8"	1/4"	208	60	1	15	11	81	33.1	31.5"	11.25"	21.6"	ROTARY	8.2	1	NTXSPH(B)06A112A	TRANE

NOTES:
1. OUTDOOR UNITS SHALL BE MOUNTED IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTION.
2. ELECTRICAL WORK MUST BE PERFORMED IN ACCORDANCE WITH RELEVANT LOCAL AND NATIONAL REGULATIONS.
3. DURING INSTALLATION, ATTACH THE REFRIGERANT PIPING SECURELY BEFORE RUNNING THE COMPRESSOR.

EXHAUST FAN

SYMBOL	TYPE	QTY.	LOCATION	FAN					WEIGHT (LBS)	DIMENSION DATA			SOUND (SONES)	MODEL	BASIS OF DESIGN
				AIRFLOW(CFM)	E.S.P(IN. OF H20)	V	HZ.	AMP.		WIDTH	DEPTH	HEIGHT			
TEX–1&2	CEILING MOUNTED	2	TOILET	80	0.1	120	60	0.3	10	10"	9.25"	5.75"	0.8	AE80	BROAN
EX–1	CURB	1	ROOF TOP	2940	0.5	208	60	1.8	70	–	–	–	–	–	–

NOTE:
1. TO AVOID MOTOR BEARING DAMAGE AND NOISY OR UNBALANCED IMPELLERS, KEEP DRYWALL SPRAY, CONSTRUCTION DUST, ETC. OFF POWER UNIT.
2. IT SHALL BE DUCTED TO A ROOF OR WALL CAP USING ROUND DUCTWORK.
3. BLOWER ASSEMBLY SHALL BE REMOVABLE, HAVE A CENTRIFUGAL TYPE BLOWER WHEEL AND A PERMANENTLY LUBRICATED.
4. MOTOR DESIGNED FOR COUNTINUOUS OPERATION.
5. PROVIDE FIRE BLANKET AND RADIATION DAMPER

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR
ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM : SS
Author : SB
Checker : AJ
Scale : N.T.S

SHEET TITLE

HVAC SCHEDULE

SHEET NO.

H5.0



MINIMUM WALL MOUNTED OBSTRUCTION SEPARATIONS
NOT TO SCALE
6

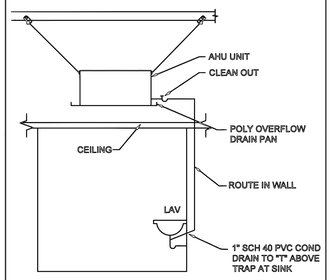

LAVATORY CONDENSOR DRAIN CONNECTION DETAIL
NOT TO SCALE
5

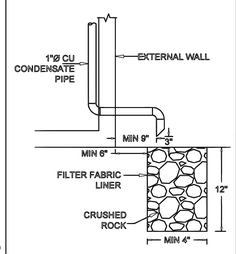

DRY WELL DETAIL
NOT TO SCALE
4

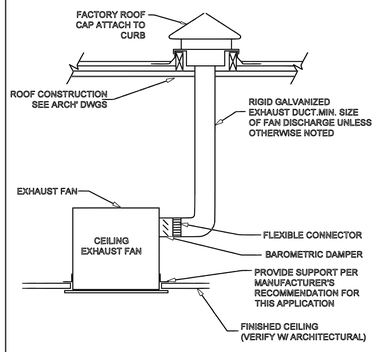

EXHAUST FAN DETAIL
NOT TO SCALE
3

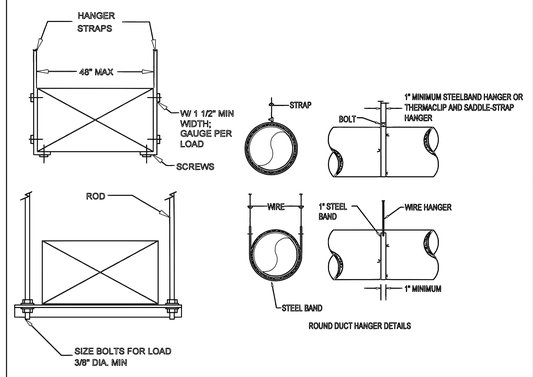

HANGER SUPPORT DETAIL
NOT TO SCALE
2

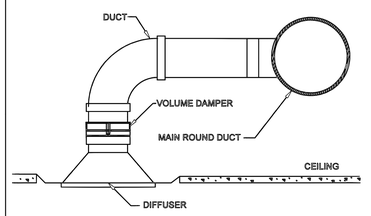

SUPPLY DIFFUSER BRANCH DUCT DETAIL
NOT TO SCALE
1

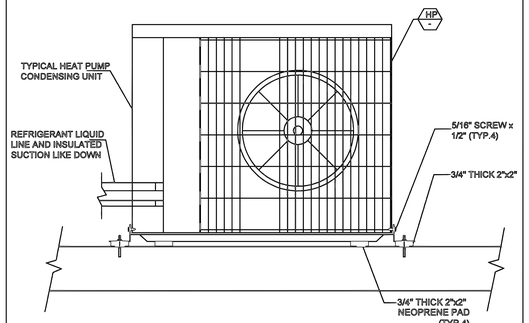

HEAT PUMP CONDENSER INSTALLATION DETAIL
NOT TO SCALE
10

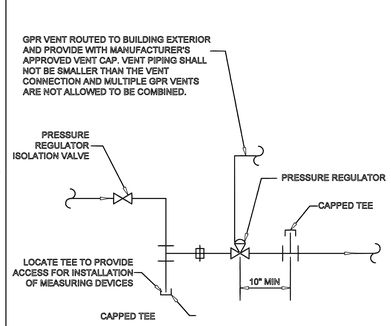

GAS PRESSURE REGULATING DETAIL
NOT TO SCALE
9

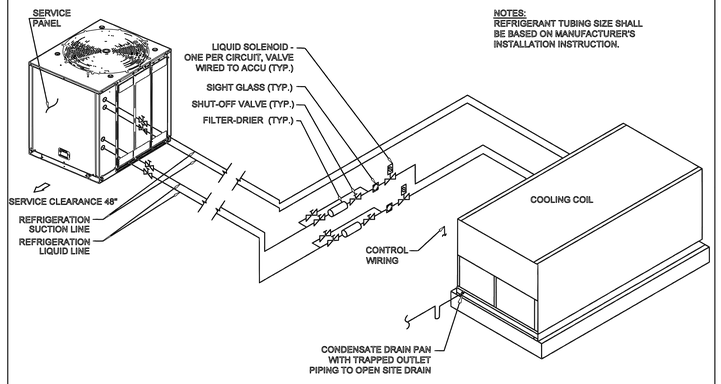

CONDENSING UNIT DETAIL
NOT TO SCALE
8

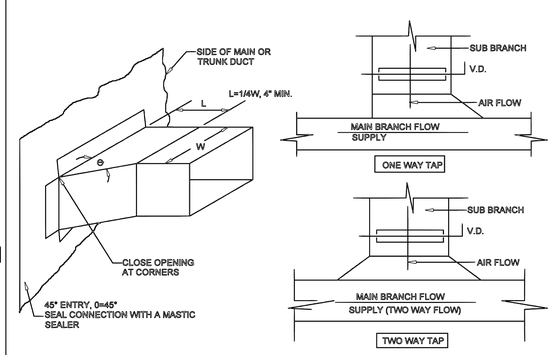

TYPICAL BRANCH CONNECTION DETAIL
NOT TO SCALE
7

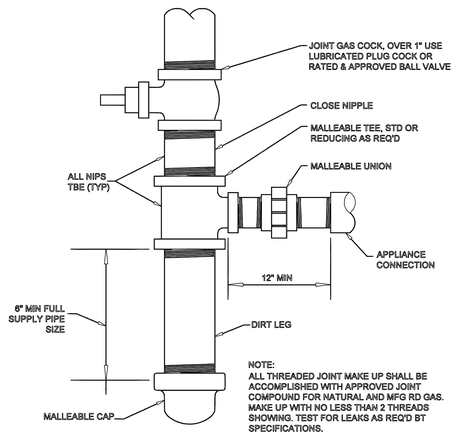

13

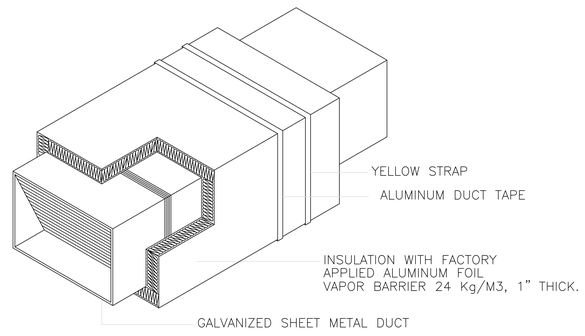

DUCT DETAIL
NOT TO SCALE
12

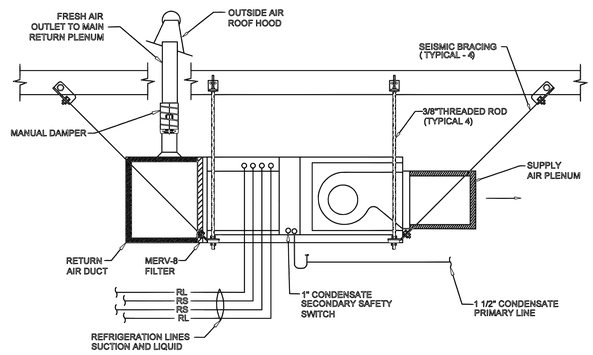

AHU INSTALLATION DETAIL
NOT TO SCALE
11

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR
ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM : HQ
Author : MJ
Checker : MJ
Scale : N.T.S

SHEET TITLE

HVAC DETAILS

SHEET NO.

H6.0