

FIXT. ID	DESCRIPTION	MANUFACTURER	MODEL	W	V	CW	HW	REMARKS
WC-1	WATER CLOSET	SELECT BY ARCHITECT	-	3"	2"	N/A	-	SELECTED BY ARCHITECT. TANK TYPE, FLOOR MOUNTED. 1.28 GPF. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION
LV-1	LAVATORY	SELECT BY ARCHITFCT	-	2"	2"	N/A	N/A	SELECTED BY ARCHITECT. 1.2 GPM @ 60 PSI MAX & 0.8 GPM @ 20 PSI MINIMUM. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION
			-	2"	2"	N/A	N/A	SELECTED BY ARCHITECT. 1.8 GPM @ 80 PSI. PRESSURE BALANCE/THERMOSTATIC MIXING VALVE: "MOEN POSI-TEMP", OR EQUAL. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION
			-	2"	2"	N/A	N/A	SELECTED BY ARCHITECT. 1.5 GPM @ 60 PSI. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION. INSINK ERATOR FOOD WASTE DISPOSER, MODEL BADGER 5 OR APPROVED EQUAL. 120V, 1/2 HP, WITH POWER CORD, ON/OFF WALL. COMPLIANCE WITH ADA 4.24.
			-	2"	-	-	-	SELECTED BY ARCHITECT. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION
			CO-380	PIPE SIZE	-	-	-	WATTS DRAINAGE CO-380 CAST IRON CLEANOUT WITH GASKETED BRASS COUNTERSUNK PLUG, AND NO HUB CONNECTION.
			CO-200-SX	PIPE SIZE	-	-	-	WATTS DRAINAGE CO-200-SX EPOXY COATED CAST IRON FLOOR CLEANOUT WITH 5"x5" SQUARE ADJUSTABLE GASKETED HEAVY DUTY NICKEL BRONZE TOP, REMOVABLE GAS TIGHT GASKETED BRASS CLEANOUT PLUG AND NO HUB OUTLET.
	CLOTH WASHER	SELECT BY ARCHITECT	-	2"	2"	N/A	N/A	SELECTED BY ARCHITECT. VERIFY FOR EXACT SPECIFICATION AND MODEL NUMBER OF PLUMBING FIXTURE WITH ARCHITECT AND OWNER PRIOR TO ORDERING AND INSTALLATION

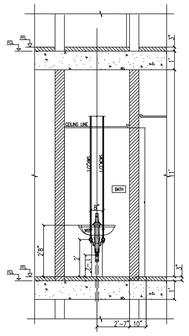


LAVOTARY CONNECTION DETAIL | N.T.S. | 1

MATERIAL SPECIFICATIONS


SERVICES		CAST IRON SOIL PIPE	GALV. STEEL SCH. 40	BLACK STEEL SCH. 40	COPPER ASTM B 2661, SCH. 40	TYPE M COPPER	TYPE L COPPER	TYPE K COPPER	PEX	CPVC 41 5381	CPVC SCH. 80	NAPCO PIPE & FITTINGS ASTM D 2665 SCH. 40 PVC
WASTE	ABOVE GROUND				•							
	BELOW GROUND				•							
VENT	ABOVE GROUND				•							
	BELOW GROUND				•							
WASTE PRESSURE PIPE EJECTION SYSTEM	ABOVE GROUND											•
	BELOW GROUND											•




DRAIN CONNECTION | N.T.S. | 3

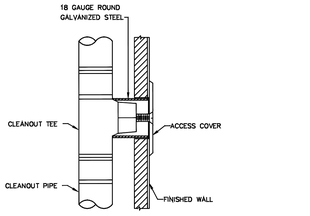


WALL CLEANOUTS DETAIL | N.T.S. | 2

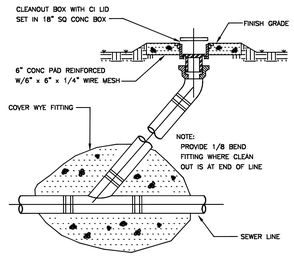

GRADE CLEANOUT DETAIL | N.T.S. | 4

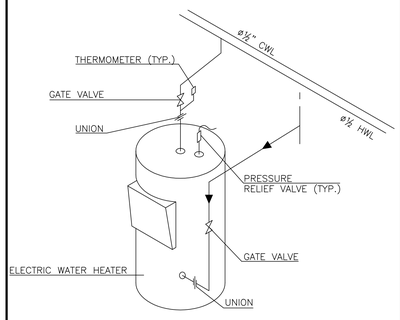

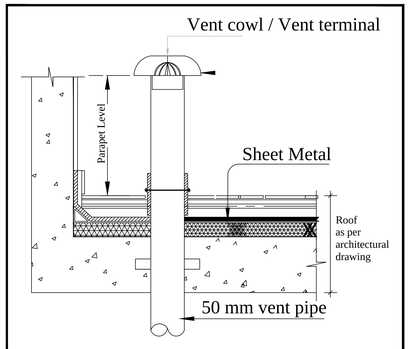

N.T.S. | 6

GENERAL NOTES


1. SOIL AND WASTE PIPE SHALL SLOPE 2% MINIMUM, UNLESS OTHERWISE NOTED OR REQUIRED BY CODE.
2. ALL DRAIN, WATER & GAS LINES SHALL BE KEPT TIGHT TO THE UNDERSIDE OF EQUIPMENT & SECURED IN PLACE.
3. CONTRACTOR SHALL VERIFY THE LOCATION OF THE SANITARY SEWER AT SITE AND SHALL REVISE THE SEWER SYSTEM AS REQUIRED.
4. PROVIDE TRAP PRIMERS FOR FLOOR DRAINS.
5. ALL CLEANOUTS SHALL BE INSTALLED WHERE READILY ACCESSIBLE. THE CONTRACTOR SHALL COORDINATE ALL CLEANOUT LOCATIONS WITH EQUIPMENT, CABINETS, ETC. AND THE ARCHITECT PRIOR TO ANY INSTALLATION.
6. ALL VALVES, TRAP PRIMERS, WATER HAMMERS ARRESTORS OR OTHER EQUIPMENT SHOWN IN WALLS OR ABOVE NON-ACCESSIBLE CEILING SHALL BE INSTALLED BEHIND AN ACCESS PANEL.
7. ALL PLUMBING FIXTURE VENTS TO TERMINATE A MINIMUM OF 12 INCHES FROM ANY VERTICAL SURFACE AND 10 FEET FROM ANY OUTSIDE AIR INTAKE.
8. CONTRACTOR SHALL PROVIDE CONDENSATE DRAINS FROM A/C UNITS TO APPROVED DRAIN POINT.
9. INSTALLATION SHALL CONFORM TO THE ENERGY CODE FOR NEW NON-RESIDENTIAL BUILDINGS.
10. PRIOR TO COMMENCING WORK ON THIS PROJECT, CONTRACTOR SHALL VERIFY DEPTH, SIZE, LOCATION AND CONDITION OF ALL EXISTING UTILITIES IN FIELD BEFORE STARTING WORK. SHOULD CONDITIONS EXIST OTHER THAN THOSE INDICATED WHICH WOULD CAUSE THE DESIGN TO BE ALTERED, CONTRACTOR SHALL NOTIFY OWNER IMMEDIATELY.
11. CONTRACTOR SHALL COORDINATE INSTALLATION OF PLUMBING WORK WITH ALL OTHER TRADES SO AS TO AVOID UNNECESSARY DELAY OR INTERFERENCES. CONTRACTOR TO REVIEW ARCHITECTURAL AND EQUIPMENT SHEETS.
12. ALL PLUMBING WORK AND MATERIALS SHALL BE INSTALLED IN ACCORDANCE WITH ALL APPLICABLE STATE & LOCAL ORDINANCES & REGULATIONS HAVING JURISDICTION. CONTRACTOR SHALL OBTAIN ALL APPROVALS REQUIRED FROM REGULATING AGENCIES BEFORE STARTING WORK. ALL PLUMBING WORK & MATERIALS SHALL MEET THE REQUIREMENTS OF THE LATEST EDITIONS OF THE LOCAL PLUMBING CODE, UNLESS OTHERWISE REQUIRED BY THE DEPARTMENT OF BUILDING & SAFETY. OBTAIN & PAY FOR ALL PERMITS, FEES & INSPECTIONS REQUIRED BY GOVERNING AUTHORITIES. ALL PIPING TO BE CONCEALED UNLESS NOTED OTHERWISE.
13. THE EQUIPMENT ROUGH-INS AS SHOWN ARE BASED UPON AVAILABLE INFORMATION HOWEVER, IN SOME INSTANCES, THE OWNER OR SUPPLIER MAY SUBSTITUTE OR THE EQUIPMENT ITEM MAY VARY FROM WHAT IS SHOWN, THEREFORE, THE CONTRACTOR SHALL VERIFY ALL CRITICAL DIMENSIONS WITH THE OWNER PRIOR TO CONSTRUCTION. FAILURE OF THE CONTRACTOR TO VERIFY THESE DIMENSIONS SHALL PLACE THE RESPONSIBILITY FOR ANY SUBSEQUENT RELOCATION DIRECTLY ON THE CONTRACTOR.
14. CONTRACTOR SHALL PROVIDE GAS PIPING TO UNITS AND ALL FINAL CONNECTIONS REQUIRED FOR OPERATION.
15. INSTALL SHUT-OFF VALVES ON ALL HOT & COLD WATER LINES TO FIXTURE OR APPLIANCE.
16. PROVIDE A LEVER HANDLE GAS SHUTOFF VALVE IN THE BRANCH PIPING OF EACH APPLIANCE OR PIECE OF EQUIPMENT. FOR EACH APPLIANCE INSTALL QUICK DISCONNECT, FLEXIBLE PIPE AND RESTRAINING DEVICE FURNISHED BY OWNER. PROVIDE PRESSURE REDUCING VALVES AT EACH PIECE OF EQUIPMENT OR APPLIANCE IF GAS PRESSURE GREATER THAN 8" IS USED DOWNSTREAM FROM THE METER.
17. ALL VALVES, UNIONS, ETC. TO BE SAME SIZE AS PIPE UNLESS OTHERWISE INDICATED ON DRAWINGS.
18. ENSURE THAT ANY PENETRATIONS MADE THROUGH THE COOLER/FREEZER UNIT ARE TO BE SEALED PROPERLY TO PREVENT WATER INFLATION.
19. ENSURE THAT ALL JOINTS, GAPS AND SPACES ALONG THE PERIMETER OF PLUMBING FIXTURES ARE TO BE SEALED WITH NSF APPROVED SEALANT TO WITHIN 1/32".
20. SURFACE MOUNTED PIPING IS NOT ACCEPTABLE PIPING AND CONDUITS OF ALL TYPES MUST BE CONCEALED WITHIN WALLS, FLOORS AND CEILING, INCLUDING CONDENSATE DRAIN LINES, WATER HEATER PRESSURE RELIED LINES AND SODA LINES.
21. REFER TO STRUCTURAL DRAWINGS FOR PIPING AND EQUIPMENT SUPPORT DETAILS.
22. ALL FITTINGS AND FIXTURES IN CONTACT WITH POTABLE WATER SHALL BE LOW LEAD.
23. CONSTRUCTION TO CONFORM WITH:
    - 2019 CALIFORNIA GREEN BUILDING CODE.
    - 2019 CALIFORNIA BUILDING CODE, WITH LOCAL AMENDMENTS.
    - 2019 CALIFORNIA MECHANICAL CODE, WITH LOCAL AMENDMENTS.
    - 2019 CALIFORNIA PLUMBING CODE. WITH LOCAL AMENDMENTS.
    - 2019 CALIFORNIA ELECTRICAL CODE, WITH LOCAL AMENDMENTS.
    - 2019 CALIFORNIA FIRE CODE, WITH LOCAL AMENDMENTS.
    - TITLE 24 ENERGY EFFICIENCY STANDARDS, 2019 EDITION.
    - ALONG WITH ANY OTHER APPLICABLE LOCAL CODE AND STATE LAWS AND REGULATIONS.
24. FLOOR SINKS, TRAPS, AND SANITARY DRAIN PIPING WITHIN 10 FEET OF DRAIN RECEIVING CONDENSATE AND EQUIPMENT DRAIN WATER BELOW 60 DEGREE F SHALL BE INSULATED WITH 1" THICK DENSITY GLASS FIBER INSULATION.
25. CONTRACTOR SHALL PROVIDE COMPLETE CONTROL DIAGRAM AND SUBMIT TO ENGINEER FOR APPROVAL PRIOR TO INSTALLATION. CONTRACTOR SHALL PROVIDE ALL THE SWITCHES, CONDUITS, WIRING, CONTACTS & INSTRUMENT IN ORDER TO ACHIEVE SEQUENCE OF OPERATION.
26. ALL THE PLUMBING INSTALLATION AND MATERIAL SHALL COMPLY WITH LAPC 2014
26. DISCHARGE LINES SHALL BE APPROVED PRESSURE RATED MATERIAL 710.4

DRAWING SCHEDULE

SHEET NUMBER	DESCRIPTION
P-1.0	PLUMBING GENERAL NOTES, DETAILS AND SCHEDULE
P-2.0	PLUMBING FLOOR PLAN & LEGENDS

ELECTRIC WATER HEATER SCHEDULE

S.NO	QTY	SERVICE	TYPE	INSTANT FLOWRATE (GPM)
1	1	ELECTRIC WATER HEATER	WALL HUNG	6.5

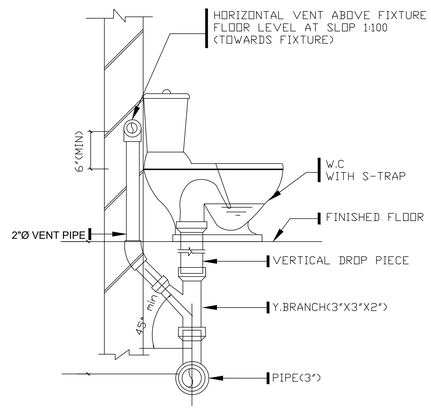

W.C ELEVEATION DETAIL

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION


PM : SS
Author : SB
Checker : AJ
Scale : N.T.S

SHEET TITLE


PLUMBING GENERAL NOTES DETAILS AND SCHEDULE

SHEET NO.


P1.0

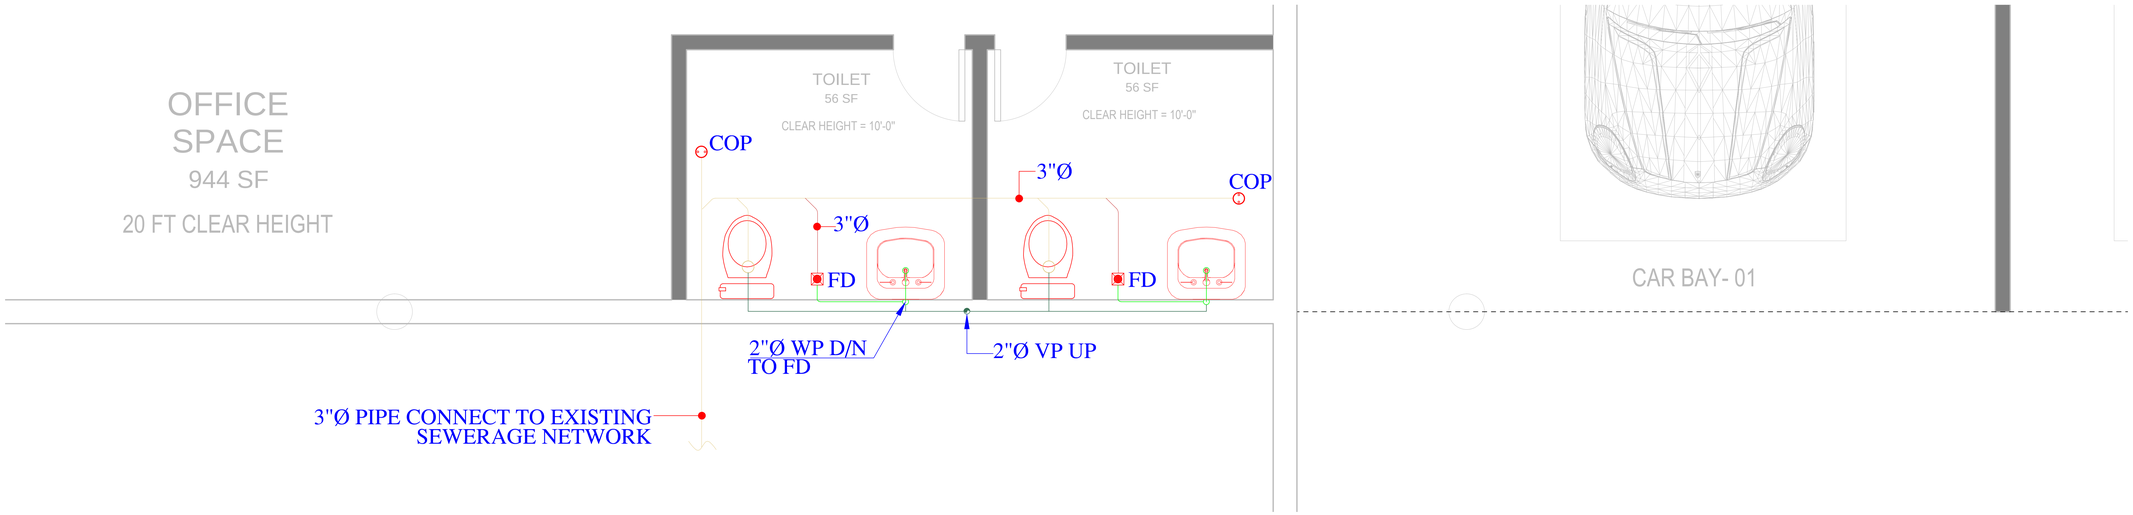

1 A0 DRAINAGE PROPOSED PLAN
SCALE: 1/2" = 1'-0"

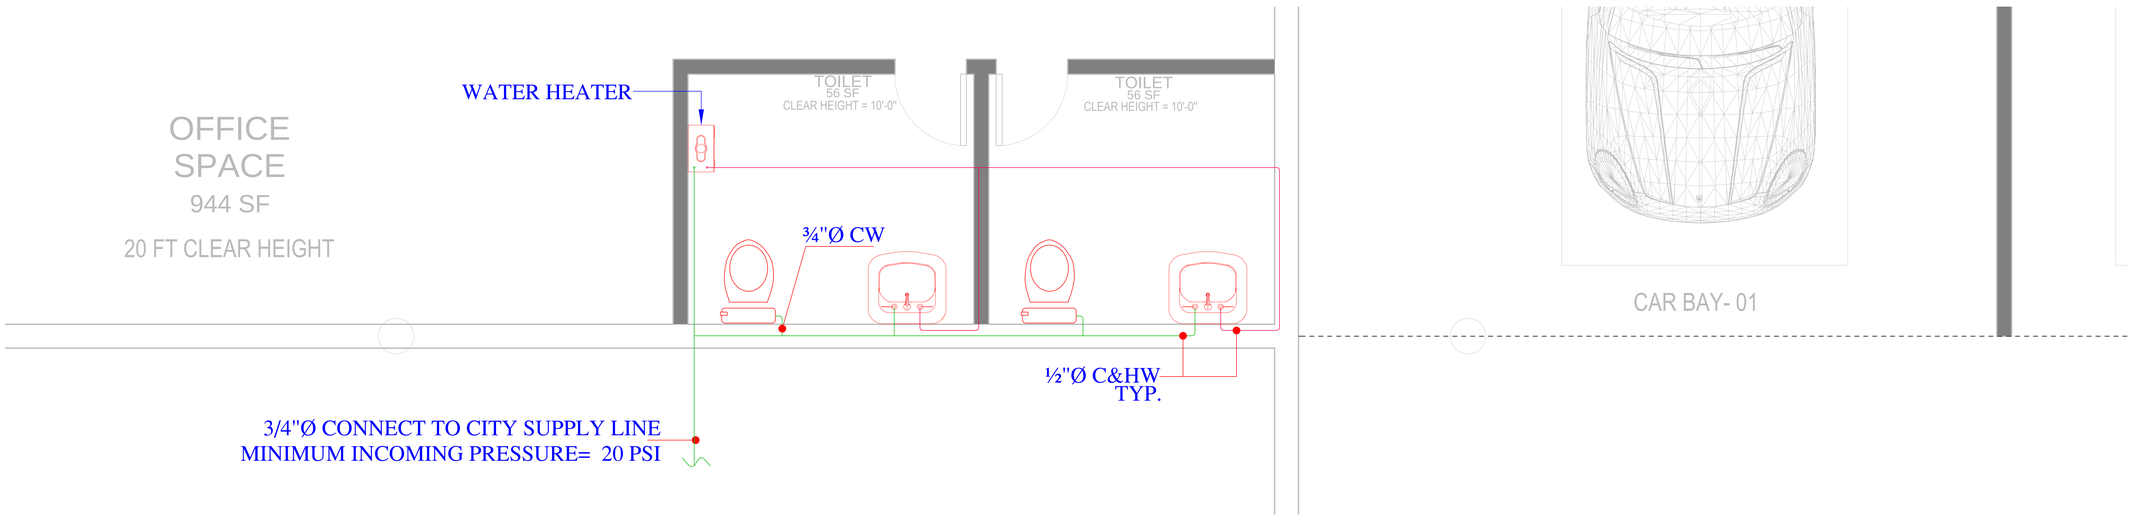

1 A0 WATER SUPPLY PROPOSED PLAN
SCALE: 1/2" = 1'-0"

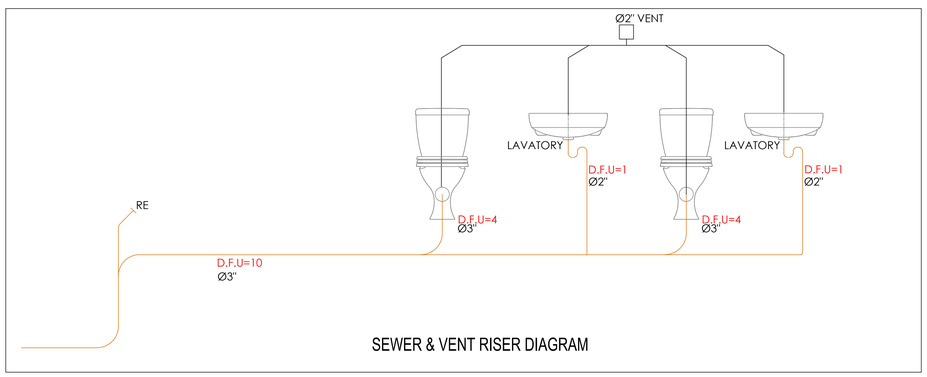

SEWER & VENT RISER DIAGRAM

SYMBOLS	DESCRIPTION/ ABBREVIATION
	SOIL PIPE (SP)
	WASTE PIPE (WP)
	VENT PIPE (VP)
	COLD WATER SUPPLY PIPE (CW)
	HOT WATER SUPPLY PIPE (HW)
	SINK/BATH TUB WASTE PIPE (WP)
	FLOOR DRAIN (FD)
	WATER GEYSER

1801 Research Blvd Suite 110
Rockville MD 20850
call: 202-465-4830
email: info@tejjy.com

COPYRIGHT

THIS DRAWING IS THE PROPERTY OF TEJJY INC, REPRODUCTION OR USE IN WHOLE OR IN PART WITHOUT PERMISSION IS STRICLTLY PROHIBITED.

SEAL

PROJECT DETAILS

TENANT LAYOUT FOR:

1301 E GUDE DR
ROCKVILLE MD 20850

REV.	DATE	DESCRIPTION

PM	:	SS
Author	:	SB
Checker	:	AJ
Scale	:	1/2" = 1'-0"

SHEET TITLE

PLUMBING PLAN

SHEET NO.

P2.0