

TENANT IMPROVEMENT

COVER SHEET - ESEAL

SEAL

Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copy.

PROJECT INFORMATION

GENERAL NOTES

THE CONTRACTOR SHALL VISIT THE SITE AND FAMILIARIZE HIMSELF WITH THE EXISTING CONDITIONS AND NOTIFY THE ARCHITECT OF ANY DISCREPANCIES IN WRITING PRIOR TO SUBMITTING HIS BID.

THE CONTRACTOR SHALL VISIT THE PROJECT SITE PRIOR TO THE SUBMISSION OF ANY BIDS, AND VERIFY THE ARCHITECTS DIMENSIONS, DETAILS AND INFORMATION PERTAINING TO THE PROJECT. IF ANY DISCREPANCIES, CONFLICTING INFORMATION, ERRORS OR OMISSIONS ARE PRESENT, THE CONTRACTOR SHALL NOTIFY THE ARCHITECT AND OWNER IMMEDIATELY IN WRITING. ANY DISCREPANCY, OR CONFLICT NOT BROUGHT TO THE ATTENTION OF THE ARCHITECT AND OWNER PRIOR TO THE FINAL BID SUBMISSION SHALL BE CORRECTED BY THE CONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.

THE CONTRACTOR SHALL NOT SCALE THE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DIMENSIONS.

THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS SHALL CARRY PUBLIC LIABILITY, PROPERTY, AND WORKMEN'S COMPENSATION INSURANCE. VALID CERTIFICATES OF ALL SHALL BE PROVIDED.

THE CONTRACTOR SHALL INCLUDE ALL WORK NECESSARY TO ASSURE THE PROJECTS COMPLIANCE WITH THE MOST STRINGENT REQUIREMENTS OF THE FLORIDA BUILDING CODE, CURRENT LOCAL EDITION, NFPA-101 AND ALL OTHER REGULATION CODES.

THE CONTRACTOR SHALL OBTAIN ALL PERMITS, AND SECURE ALL CERTIFICATES OF INSPECTION AND OCCUPANCY THAT ARE REQUIRED BY THE GOVERNING JURISDICTION. THE OWNER SHALL RECEIVE A COPY OF THE PERMIT UPON ISSUANCE.

THE CONTRACTOR SHALL REFERENCE THE BUILDING SHELL DRAWINGS FOR ALL INFORMATION RELATIVE TO THE BUILDING SHELL AND FOR COORDINATION OF NEW WORK.

THE GENERAL CONTRACTOR AND ALL SUBCONTRACTORS/VENDORS SHALL FAMILIARIZE THEMSELVES WITH AND CONFORM TO ALL REQUIREMENTS SET FORTH BY THE BUILDING OWNER OR MUNICIPALITY RELATIVE TO THE HOURS OF WORK.

THE CONTRACTOR SHALL SUBMIT A DETAILED CONSTRUCTION SCHEDULE COORDINATION ALL SUBCONTRACTORS, SUPPLIERS AND VENDORS.

THE CONTRACTOR SHALL NOT ALLOW ON THE PROJECT ANY MATERIALS CONTAINING ASBESTOS, PETROLEUM OR PCB.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND DISTRIBUTING ALL CURRENT DRAWINGS TO THE SUBCONTRACTORS/VENDORS AS WELL AS SUPERVISING AND COORDINATING THE WORK OF ALL TRADES IN ACCORDANCE WITH THE SPECIFICATIONS AND MAKING ADJUSTMENTS IN LAYOUT AS REQUIRED. THE ARCHITECT SHALL BE NOTIFIED PRIOR TO THE EXECUTION OF THEIR REVISIONS TO AVOID CONFLICT BETWEEN TRADES FOR PROPER EXECUTION OF THE WORK.

THE CONTRACTOR SHALL INSTALL ANY APPARATUS, APPLIANCE, MATERIAL OR WORK NOT SHOWN ON THE DRAWINGS BUT MENTIONED IN THE SPECIFICATIONS, OR VICE VERSA, OR ANY INCIDENTAL ACCESSORIES NECESSARY FOR COMPLETION OF THE WORK FOR OPERATION WITHOUT ADDITIONAL EXPENSE TO OWNER.

THE CONTRACTOR SHALL COORDINATE ALL OWNER/TENANT SUPPLIED ITEMS AND INCORPORATE THE INSTALLATION INTO THE CONSTRUCTION SCHEDULE.

THE CONTRACTOR SHALL PROVIDE ANY TEMPORARY UTILITIES INCLUDING, ELECTRICAL, WATER, AND TELEPHONE REQUIRED FOR THE COMPLETION OF THE PROJECT.

THE CONTRACTOR SHALL HAVE A DIGITAL CAMERA ON SITE TO DOCUMENT ANY ISSUES THAT MAY NEED TO BE CLARIFIED. THESE PICTURES SHALL BE EMAILED TO THE ARCHITECT ALONG WITH AN RFI FOR CLARIFICATION.

THE CONTRACTOR SHALL PROVIDE AT ALL TIMES PROTECTION FROM THE WEATHER AND EXCESSIVE DUST THAT MAY IN ANY WAY DAMAGE THE WORK, MATERIAL, FIXTURES, AND EQUIPMENT, OR PRESENT DANGER TO PERSONNEL, ANY WORK UNDER CONTRACT BY THE GENERAL CONTRACTOR DAMAGED BY A FAILURE TO PROVIDE ADEQUATE PROTECTION SHALL BE REMOVED AND REPLACED WITH NEW WORK AT THE SOLE EXPENSE OF THE CONTRACTOR.

THE CONTRACTOR SHALL MAINTAIN THE JOB SITE FREE FROM RUBBISH AND DEBRIS. DISPOSAL OF ALL CONSTRUCTION DEBRIS SHALL CONFORM TO BUILDING REGULATIONS.

THE CONTRACTOR SHALL RUN FIRE RATED WALLS AND PARTITIONS TO UNDERSIDE OF RATED ROOF/CEILING ASSEMBLY ABOVE: TAPE AND SEAL JOINTS. PROVIDE FIRE DAMPERS AT DUCT PENETRATIONS AS REQUIRED BY CODE. TAPE AND SEAL OTHER PENETRATIONS TO MAINTAIN INTEGRITY OF FIRE-RATED PARTITION USING ONLY UL APPROVED MATERIAL.

THE CONTRACTOR SHALL FINISH GYPSUM WALLBOARD ABUTTING OTHER MATERIAL WITH METAL EDGE STRIPS. CONCEAL PIPING, DUCTWORK, AND CONDUIT.

THE CONTRACTOR SHALL BACK ALL ELECTRICAL CABINETS, FIRE EXTINGUISHERS, CABINETS AND OTHER RECESSED EQUIPMENT LOCATED IN FIRE-RATED WALLS WITH 5/8"TYPE 'X' GYPSUM BOARD AS REQUIRED TO MAINTAIN THE RATING.

THE CONTRACTOR SHALL PROVIDE BRACING OR BLOCKING AS REQUIRED TO SUPPORT WALL MOUNTED EQUIPMENT: CABINETS, GRILLES, DOORS, WINDOWS, ETC.. WOOD BLOCKING SHALL BE FIRE RETARDANT TREATED. METAL STUDS MAY BE USED IN LIEU OF WOOD BLOCKING.

THE CONTRACTOR SHALL NOT CUT ANY STEEL, WOOD, OR OTHER MAIN STRUCTURAL MEMBERS WITHOUT WRITTEN APPROVAL OF THE STRUCTURAL ENGINEER.

ANY ROOM, WALL, FLOOR, OR CEILING FINISH NOT SCHEDULED SHALL BE ASSUMED TO BE IDENTICAL TO THE CLOSEST ROOM OF SIMILAR USE AND TYPE FOR PURPOSES OF BIDDING AND CONSTRUCTION. NOTIFY THE ARCHITECT OF ANY OBSERVED APPARENT DISCREPANCIES IN WRITING PRIOR TO COMMENCING WITH THE WORK.

ANY DETAIL NOT SPECIFICALLY REFERENCED SHALL BE ASSUMED TO BE SIMILAR TO THAT SHOWN IN THE CLOSEST POSITION WHERE A SIMILAR CONDITIONS OCCURS FOR THE PURPOSES OF BIDDING AND CONSTRUCTION. NOTIFY THE ARCHITECT IN WRITING OF ANY OBSERVED APPARENT DISCREPANCIES PRIOR TO COMMENCING WITH THE WORK.


WHERE TWO OR MORE DETAILS, MATERIALS, OR CONDITIONS OCCUR IN APPARENT CONFLICT, THE CONTRACTOR SHALL INCLUDE THE MOST COST EFFECTIVE SOLUTION IN HIS BID AND NOTIFY THE ARCHITECT OF ANY APPARENT DISCREPANCIES PRIOR TO START CONSTRUCTION.

THE CONTRACTOR SHALL PROVIDE UPON COMPLETION OF THE WORK A SET OF "AS-BUILT" NEATLY MARKED UP PLANS, THE ELECTRICAL CONTRACTORS "AS-BUILT" DRAWINGS SHALL BE INCLUDED. THESE DRAWINGS SHALL BE TRANSMITTED TO THE OWNER.

ABBREVIATIONS

AB	ANCHOR BOLT	GL	GLASS	PNL	PANEL
A/C	AIR CONDITIONING	GR	GRADE	PNT	PAINT
AFF	ABOVE FINISH FLOOR	GYP	GYPSUM	POL	POLISHED
ALUM	ALUMINUM	HB	HOSE BIBB	PREFAB	PREFABRICATED
APPROX	APPROXIMATE	HCP	HANDICAP	PROJ	PROJECT
ARCH	ARCHITECTURAL	HDW	HARDWARE	PSF	POUNDS PER SQ. FOOT
BD	BOARD	HGT	HEIGHT	PSI	POUNDS PER SQ. INCH
BLDG	BUILDING	HM	HOLLOW METAL	PRTR	PRESSURE TREATED
BLK	BLOCK	HR	HOUR	PTD	PAINTED
BOTT	BOTTOM	HVAC	HEATING/VENTILATING/	PVMT	PAVEMENT
BRG	BEARING		AIR CONDITIONING	QTY	QUANTITY
BTWN	BETWEEN	HW	HOT WATER	REF	REFRIGERATOR
CAB	CABINET	IN	INCH	REQD	REQUIRED
CLG	CEILING	INCAND	INCANDESCENT	REINF	REINFORCING
CEM	CEMENT	INCL	INCLUDE	RET	RETURN
CL	CLOSET	INFO	INFORMATION	REV	REVERSE, REVISION
CLR	CLEAR	INSUL	INSULATE-INSULATION	RGD	RIGID
COL	COLUMN	INT	INTERIOR	RM	ROOM
CONC	CONCRETE	KITCHEN	KITCHEN	RO	ROUGH OPENING
CONSTR	CONSTRUCTION	LAM	LAMINATED	SCHED	SCHEDULE
CONT	CONTINUOUS	LAV	LAVATORY	SD	SOAP DISPENSER
CONTR	CONTRACTOR	LB	POUND	SEP	SEPARATE
CTR	CERAMIC TILE	LIN	LINEAR	SECT	SECTION
DEG	DEGREE	LL	LIVE LOAD	SHLF	SHELF
DEPT	DEPARTMENT	LVT	LIGHT	SHT	SHEET
DET	DETAIL	LVR	LOUVER	SIM	SIMILAR
DF	DRINKING FOUNTAIN	MATL	MATERIAL	SPEC	SPECIFICATION
DIA	DIAMETER	MAX	MAXIMUM	SPKR	SPEAKER
DIM	DIMENSION	MECH	MECHANICAL	SQ	SQUARE
DN	DOWN	MEMB	MEMBRANE	STD	STANDARD
DR	DOOR	MTL	METAL	STL	STEEL
DWG	DRAWING	MFC	METAL FURRING CHAN	STOR	STORAGE
EA	EACH	MFR	MANUFACTURER	SUB	SUBSTITUTE
EL	ELEVATION	MIN	MINIMUM	SURF	SURFACE
ELEC	ELECTRICAL	MIR	MIRROR	SUSP	SUSPEND-SUSPENDED
EQ	EQUAL	MISC	MISCELLANEOUS	SYS	SYSTEM
EQUIP	EQUIPMENT	MO	MASONRY OPENING	T & G	TONGUE & GROOVE
EQUIV	EQUIVALENT	MR	MOISTURE RESISTANT	TEL	TELEPHONE
EW	EACH WAY	NAT	NATURAL	THK	THICK-THICKNESS
EXH	EXHAUST	NIC	NOT IN CONTRACT	TPH	TOILET PAPER HOLDER
EXIST	EXISTING	#	NUMBER	TRANS	TRANSFORMER
EXT	EXTERIOR-EXTERNAL	NOM	NOMINAL	TYP	TYPICAL
FIN	FINISH	NTS	NOT TO SCALE	UGND	UNDERGROUND
FIX	FIXTURE	OA	OVERALL, OUTSIDE AIR	UL	UNDERWRITERS LAB.
FLR	FLOOR	OC	ON CENTER	VERT	VERTICAL
FLUOR	FLUORESCENT	OPG	OPENING	WI	WITH
FURR	FURRING	OPP	OPPOSITE	WC	WATER CLOSET
GA	GAGE, GAUGE	ORIG	ORIGINAL	WH	WATER HEATER
GALV	GALVANIZED	PART	PARTITION	WM	WIRE MESH
		PL	PLATE	W/O	WITHOUT
		PLAS	PLASTER	WP	WATERPROOF
		PLYWD	PLYWOOD	WS	WEATHER STRIPPING
				WWF	WELDED WIRE FABRIC

SYMBOLS

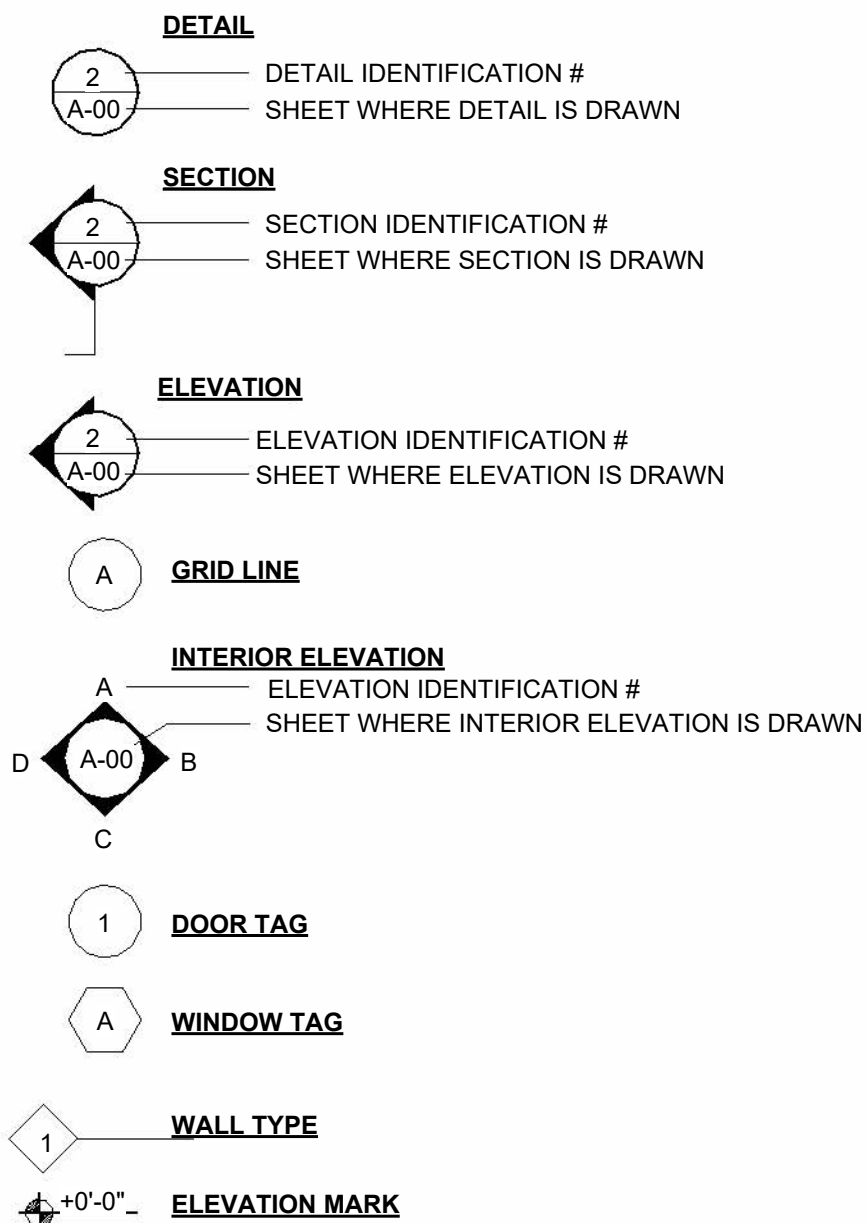

PROJECT DATA

SCOPE OF WORK:		COMMERCIAL IMPROVEMENTS FOR HAIR SALON	
	NEW ELECTRICAL WORK		
	NEW HVAC WORK		
	NEW PLUMBING WORK		
	NEW EXTERIOR SHELL WORK		
	REPAIR - NEW INTERIOR WALLS		
	NO EXTERIOR SHELL WORK		
	ADA COMPLAANCE		

PROPERTY OWNER:			
ADDRESS:			
LEGAL DESCRIPTION:			
PARCEL ID NUMBER:			
BUILDING HEIGHT		ONE STORY	
EXISTING BUILDING AREA:		SQ. FT.	38,079
AREA OF WORK:		SQ. FT.	1,832
TYPE OF CONSTRUCTION:		TYPE III - B	
LEVEL OF ALTERATION		SECTION 504 ALTERATION—LEVEL 2 504.1 Scope. Level 2 alterations include the reconfiguration of space, the addition or elimination of any door or window, the reconfiguration or extension of any system, or the installation of any additional equipment.	
OCCUPANCY CLASSIFICATION		BUSINESS - B	

CODE CALCULATIONS

OCCUPANCY USE PER FBC TABLE 1004.1.2		BUSINESS	
NEW HAIR SALON		AREA OF IMPROVEMENT	UNIT AREA: SQUARE FOOT PER PERSON
OCCUPANCY LOAD CALCULATIONS		1832 S.F.	150 = 13.0 OCCUPANT Load
PLUMBING FIXTURES CALCULATIONS PER TABLE 403.1 (PEOPLE @ LOAD = XX)			
- Water Closets		1/ 25 for the first 50 and 1/50 for remainder	
		25 @ 1/25 = 1	
		0 @ 1/50 = 0	
		1 REQUIRED	
M/F 50% (UNISEX)		1 Proposed toilets	
- LAVATORIES		1 / 40 for the first 80 and 1/80 for remainder	
		13 @ 1/40 = 1	
		0 @ 1/80 = 0	
		1 REQUIRED	
M/F 50% (UNISEX)		1 Proposed Lavs	
- DRINKING FOUNTAIN		1/100 PEOPLE OR OCCUPANT LOAD EXCEEDS 15 PEOPLE	
		13 @ 1/100 = 0.0	
		0.0 NOT REQUIRED occupant load <= 15 pp	
- SERVICE SINK		IF OCCUPANCY = BUSINESS AND LESS THAN 15 THEN NOT REQUIRED	
		13 @ 1 = 0.0	
		0.0 NOT REQUIRED occupant load <= 15 ppl	


APPLICABLE CODES

GOVERNING CODES	
A.	FLORIDA BUILDING CODE 7TH EDITION (2020) BUILDING
B.	FLORIDA BUILDING CODE 7TH EDITION (2020) ACCESSIBILITY
C.	FLORIDA BUILDING CODE 7TH EDITION (2020) ENERGY CONSERVATION
D.	FLORIDA BUILDING CODE 7TH EDITION (2020) EXISTING BUILDING
E.	FLORIDA BUILDING CODE 7TH EDITION (2020) FUEL GAS
F.	FLORIDA BUILDING CODE 7TH EDITION (2020) MECHANICAL
G.	FLORIDA BUILDING CODE 7TH EDITION (2020) PLUMBING
H.	FLORIDA BUILDING CODE 7TH EDITION (2020) RESIDENTIAL
I.	FLORIDA BUILDING CODE 7TH EDITION (2020) TEST PROTOCOLS
J.	FLORIDA FIRE PREVENTION CODE 7TH EDITION (2020) FFPC
K.	2020 NFPA 70 NATIONAL ELECTRIC CODE
L.	NFPA 101 LIFE SAFETY CODE AND ADOPTED STANDARDS
M.	NFPA 1

DRAWING INDEX

Sheet List		
Sheet Seq	Sheet Number	Sheet Name
1	A-0	COVER SHEET
0. GENERAL CONDITIONS: 1		
1	A-1	PROPOSED FLOOR PLAN
2	A-2	LIFE SAFETY PLAN
3	A-3	REFLECTED CEILING
4	A-5	CONSTRUCTION DETAILS
5	A-6	CONSTRUCTION DETAILS
6	A-7	ADA SPEC CONSTRUCTION DETAILS
7	A-8	PROPOSED FLOOR TRENCHING
8	A-8.1	PRESENTATION MODEL
1. ARCHITECTURE: 8		
1	E-0	ELECTRICAL NOTES AND SPECIFICATONS
2	E-1	PROPOSED ELECTRICAL PLAN
2. ELECTRICAL: 2		
1	M-0	MECHANICAL NOTES AND SCHEDULES
2	M-0.1	MECHANICAL NOTES AND DETAILS
3	M-1	PROPOSED MECHANICAL PLAN
3. MECHANICAL: 3		
1	P-0	PLUMBING NOTES AND SCHEDULES
2	P-0.1	PLUMBING NOTES AND DETAILS
3	P-1	PROPOSED PLUMBING PLAN
4	P-2	PROPOSED PLUMBING ISOMETRIC
4. PLUMBING: 4		
Grand total: 18		

LOCATION MAP

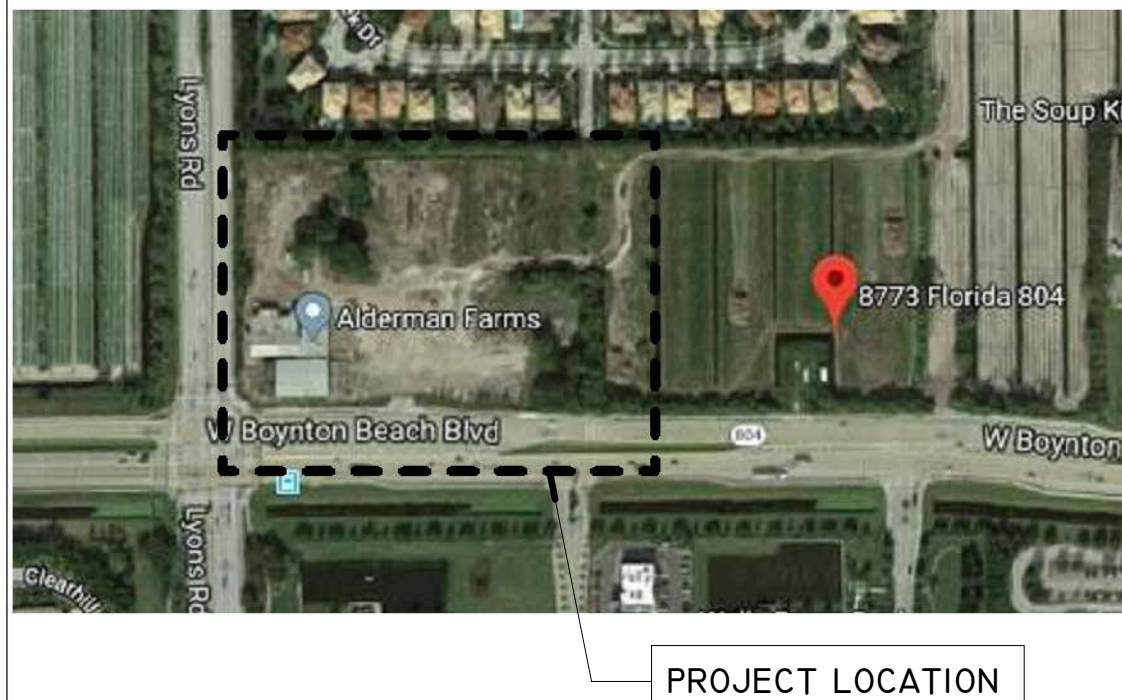

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

COVER SHEET

SHEET: 1 of 18

SHEET NUMBER

A-0

0. GENERAL CONDITIONS

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

4/12/2022 10:43 PM

K:\Projects\Projects\22-2076 - UDSI Metro Parkway #101 14Meters-High-Salon-CAD FILES\Sabin_MemoA1.rvt

PLAN KEYNOTES

Key Value	Keynote Text
-----------	--------------

Room Schedule Space Analysys

Occupant	Area	Under_Air
	1602 SF	
	1602 SF	

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE. IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

ROOM SCHEDULE

Comments	Number	Name	Base Finish	Ceiling	Wall Finish	Floor Finish	Area
	12	Room 4					101 SF
	13	Room 3					101 SF
	14	CORRIDOR					66 SF
	15	Room 4					64 SF
	16	BREAK RM					62 SF
	17	Room 2					64 SF
	18	TOILET					49 SF
	19	STYLING AREA					1095 SF
							1602 SF

: 8


DOOR SCHEDULE

Type Mark	Family	Size	Type Comments	Comments	Frame Material
42	Door-Single-Panel	36" x 80"			WD
75	Door-Opening	36" x 80"	CASED OPENING		WD
76	Door-Overhead-Rolling	168" x 168"	EXISTING TO REMAIN		

Window Schedule

Type Mark	Type	Assembly Description	Sill Height	Comments
35	48" X 72" SideDoor SideLite	Windows	3"	EXISTING, NIC

35: 3
EXISTING, NIC: 3

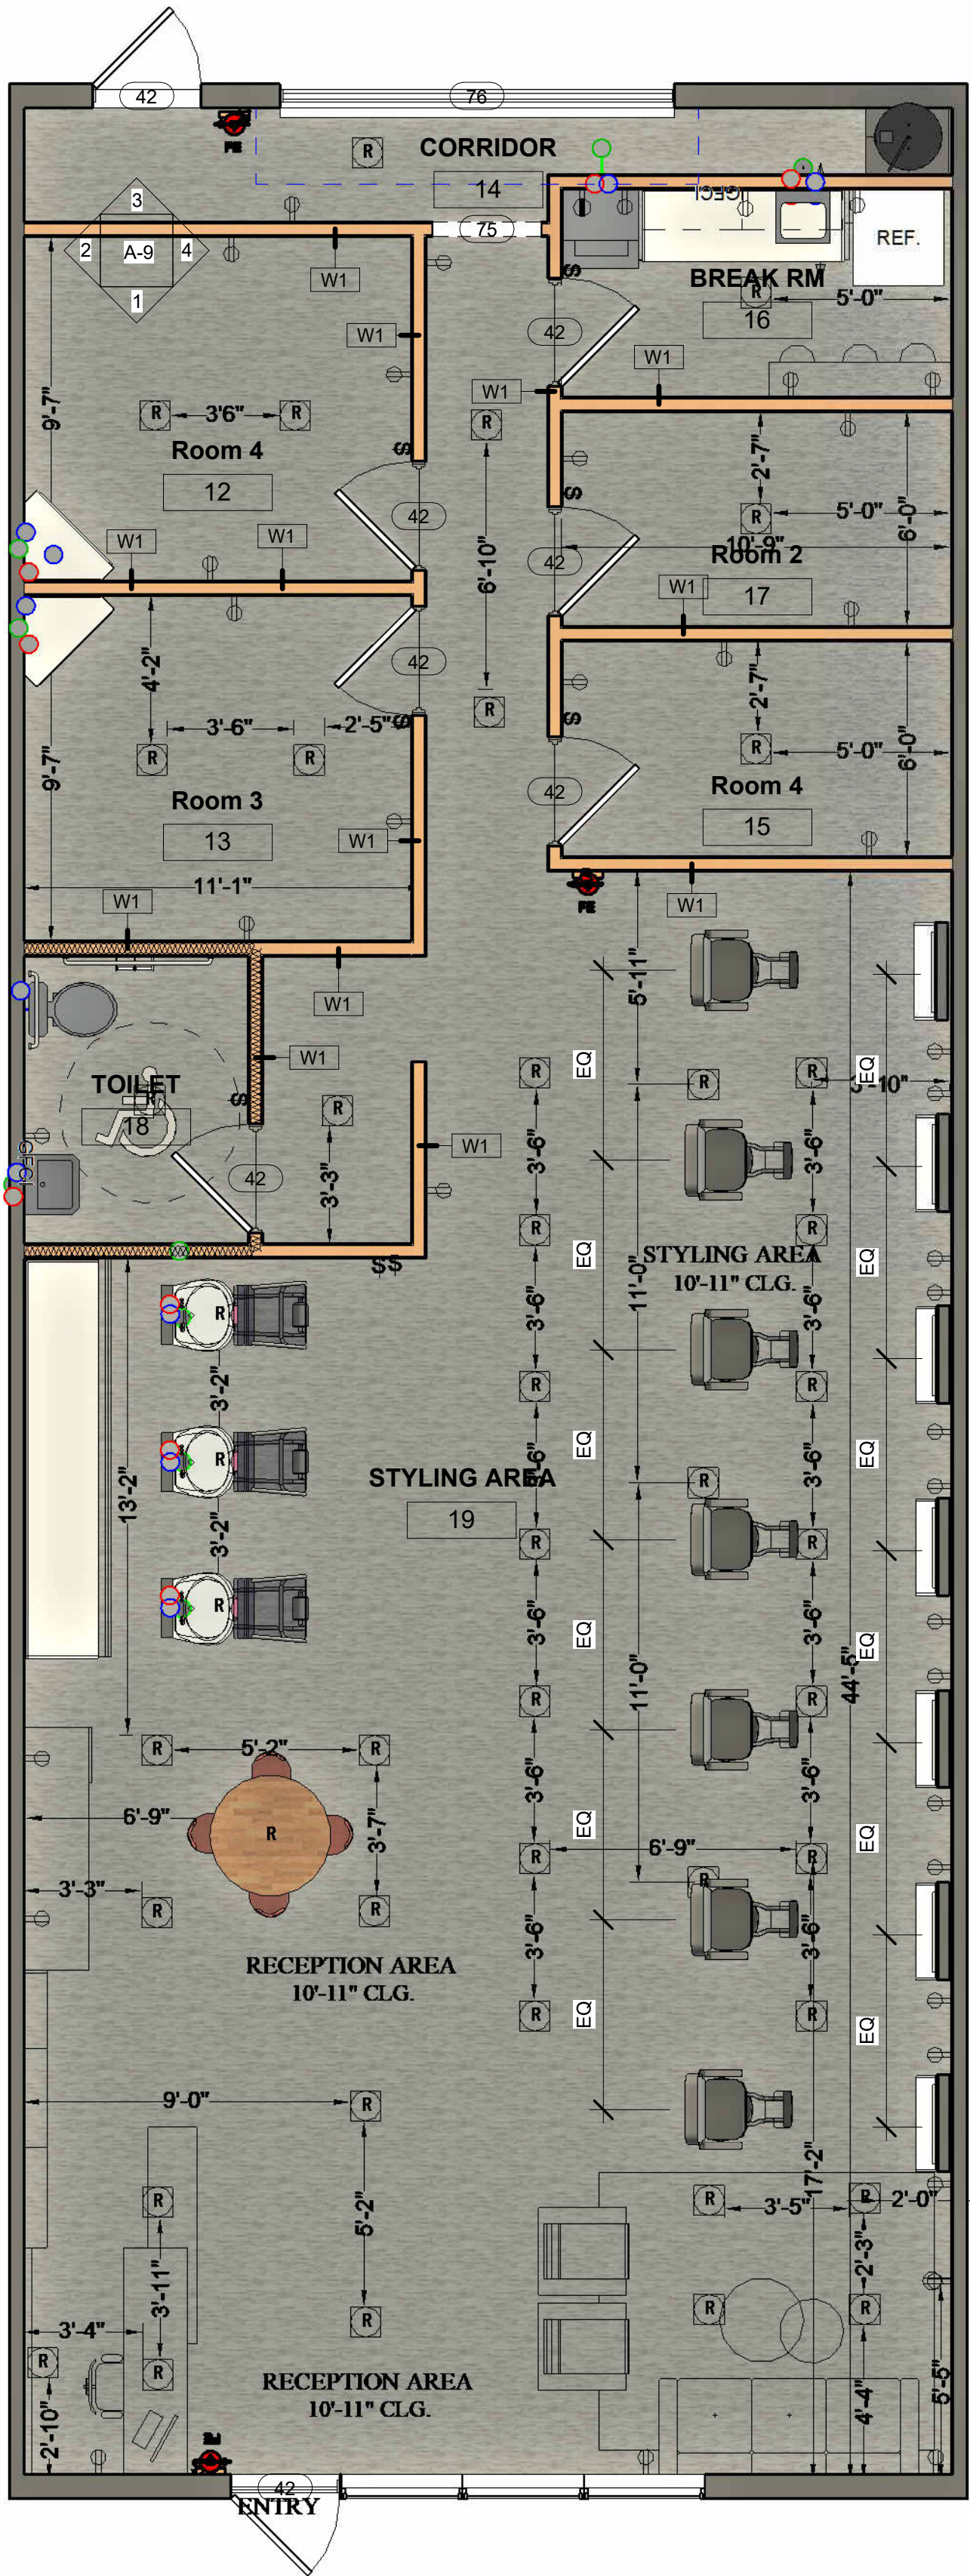

1 FLOOR PLAN
1/4" = 1'-0"

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

PROPOSED FLOOR PLAN

SHEET: 1 of 18

SHEET NUMBER

A-1

L ARCHITECTURE

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

4/7/2022 1:58:47 PM

K:\Projects\Projects\22-2076 - UDSI Metro Parkway #01 14Meters-High-Salon-CAD FILES\Sabin_MerchPlan.rvt

PLAN KEYNOTES

Key Value	Keynote Text
-----------	--------------

GENERAL NOTES

DO NOT SCALE DRAWINGS FOLLOW THE MEASUREMENTS ONLY AS SHOWN ON THE DRAWINGS. IF THERE ARE ANY DISCREPANCIES IN THE MEASUREMENTS OR ON THE DRAWINGS IN ANY FORM WHAT-SO-EVER THEY SHALL BE BROUGHT TO THE ATTENTION OF THE DESIGNER A/D/OR ARCHITECT AS SOON AS POSSIBLE

NOTE:
INTERIOR FINISHES SHALL COMPLY WITH NFPA 10 CHAPTER 40.3.3
INTERIOR WALL AND CEILINGS FINISHES SHALL COMPLY WITH 10.2.3
NFPA 255, ASTM E 84 ASSY CLASS B OR CLASS C IN OPERATING AREAS AND SHALL BE REQUIRED BY 7.1.4 IN EXIT ENCLOSURES.

EXTINGUISHMENTS REQUIREMENTS NFPA 101 CHAPTER 38.3.5
PORTABLE FIRE EXTINGUISHERS SHALL BE PROVIDED IN EVERY BUSINESS OCCUPANCY IN ACCORDANCE WITH NFPA 9.7.4.1.

LIFE SAFETY PLAN NOTES

TRAVEL DISTANCE = XX'-X"



FIRE EXTINGUISHER

-PORTABLE FIRE EXTINGUISHER TYPE 2A 10BC, WITH ANNUAL SERVICE TAGS.
-TOP AT 48" AFF OR PLACED HIGH ENOUGH TO BE SEEN ANYWHERE ON FLOOR
-FIRE EXTINGUISHERS SIGNS SHALL BE LOCATED BY ALL EXIT DOORS AND EVERY 75 FEET THEREAFTER.



EXIT SIGN

EMERGENCY LIGHT


EMERGENCY LIGHT/EXIT SIGN COMBO

E - EXISTING TO REMAIN
R - RELOCATE
D - DEMOLISH
N - NEW

SPRINKLER SYSTEM:	NO
FIRE ALARM:	NO
TRAVEL DISTANCE: (FBC 1016.2)	250' MAXIMUM ALLOWED
EGRESS WIDTH: (FBC 1005.3.2)	13.8" REQUIRED 92" PROVIDED
OCCUPANCY CLASSIFICATION:	SEE COVER SHEET FOR OCCUPANCY DETAILS
OCCUPANCY LOAD:	SEE COVER SHEET FOR OCCUPANCY DETAILS

TYPICAL EXTINGUISHER DETAIL
SCALE 1-1/2" = 1'-0"

MOUNTING HEIGHT:
THE MAXIMUM REACH FOR THE EXTINGUISHER NOT TO EXCEED 48" A.F.F.

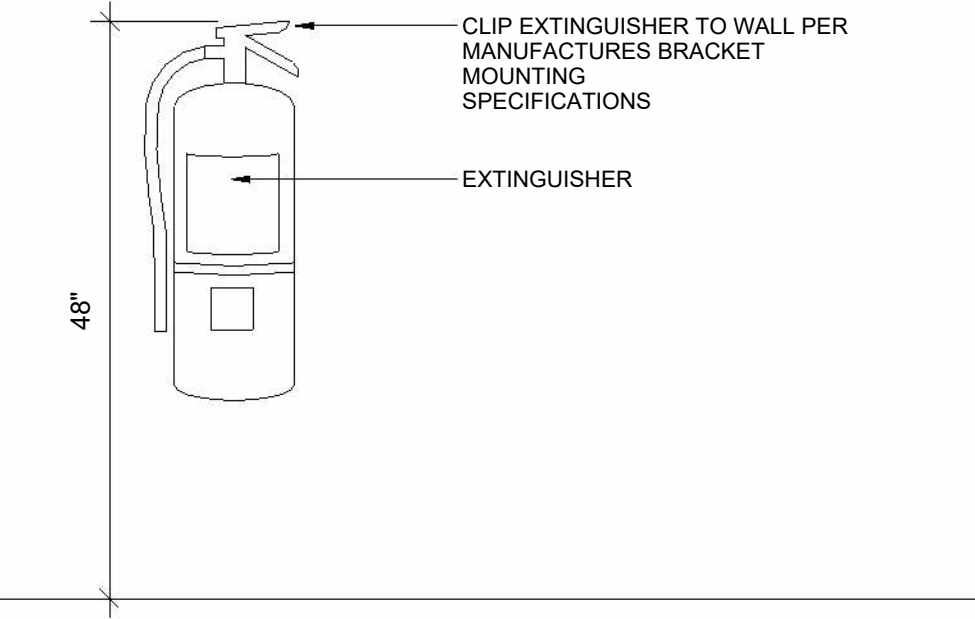

CLIP EXTINGUISHER TO WALL PER MANUFACTURES BRACKET MOUNTING SPECIFICATIONS

EXTINGUISHER

48"

WALL PROJECTIONS:
ADA ACCESSIBILITY GUIDELINES (ADAAG)SPECIFY THAT OBJECTS PROJECTING FROM WALLS WITH THEIR LEADING EDGES BETWEEN 27" AND 80" ABOVE THE FINISHED FLOOR SHALL PROTRUDE NO MORE THAN 4" INTO WALKS, CORRIDORS, PASSAGEWAYS, OR AISLES. OBJECTS MOUNTED WITH THEIR LEADING EDGES AT OR BELOW 27" MAY PROTRUDE ANY AMOUNT.

FIRE EXTINGUISHER SPECIFICATION

LARSEN MP5/2A-10B:C/5LB/BACKET 1521 W/ANUAL SERVICE TAGS.

MOUNTING HEIGHTS - SEE DETAIL THIS SHEET

A. ADA GUIDELINES SPECIFY REACH RANGES FOR BUILDING OCCUPANTS WHO REQUIRE ACCESS TO EQUIPMENT SUCH AS FIRE EXTINGUISHERS AND OTHER FIRE SAFETY DEVICES.

B. FOR AN UNOBSTRUCTED APPROACH, THE MAXIMUM FORWARD REACH TO THIS EQUIPMENT (FOR EXAMPLE, THE FIRE EXTINGUISHER HANDLE) IS 48" ABOVE THE FLOOR. THE MAXIMUM SIDE REACH FOR SUCH AN APPROACH IS 54". THE ACTUAL MOUNTING HEIGHTS FOR CABINETS HOUSING THIS EQUIPMENT CAN BE DETERMINED BY REVIEWING THE EXACT DIMENSIONS OF THE SPECIFIED CABINET AND THE POSITIONING OF THE FIRE EQUIPMENT WITHIN THAT CABINET. PLEASE NOTE THAT THESE ADAAG REACH RANGE REQUIREMENTS FALL WITH THE NFPA (NATIONAL FIRE PROTECTION ASSOCIATION) GUIDELINES. THE NFPA GUIDELINES STATE THAT THE DISTANCE FROM THE FLOOR TO THE TOP OF THE FIRE EXTINGUISHER TO BE NO MORE THAN 5 FEET.

D. FIRE EXTINGUISHERS SIGNS SHALL BE LOCATED BY ALL EXIT DOORS AND EVERY 75 FEET THEREAFTER. FIRE EXTINGUISHERS ARE TO BE LOCATED SUCH THAT TRAVEL DISTANCE DOES NOT EXCEED 75'.

E. MOUNTING BRACKET AT HEIGHT REQUIRED TO PERMIT FIRE EXTINGUISHER ACCESS AT 48" MAX. AFF. FIRE EXTINGUISHERS SHALL BE LOCATED PER THE REQUIREMENTS OF NFPA 101, LIFE SAFETY CODE, CHAPTER 10, 2000 EDITION.

F. THE SIZE SHALL BE A MINIMUM OF 2 A 10 B/C.

G. EXACT NUMBER AND LOCATIONS FOR REQUIRED FIRE EXTINGUISHERS TO BE DETERMINED BY THE GENERAL CONTRACTOR AT THE DISCRETION OF THE FIRE INSPECTOR FOR THE JURISDICTION ISSUING THE PERMIT FOR THIS PROJECT.

H. F.E. - FIRE EXTINGUISHERS SHALL BE 5lb ABC TYPE AT LOCATIONS INDICATED.

1 LIFE SAFETY PLAN
1/4" = 1'-0"

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

LIFE SAFETY PLAN

SHEET: 2 of 18

SHEET NUMBER

A-2

L ARCHITECTURE

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

PLAN KEYNOTES	
Key Value	Keynote Text
RC1	INSTALL ACOUSTICAL CEILING TILE, CONTINUOUS, MATCH EXISTING STYLE AND COLOR
RC3	NEW 2X2 AIR TERMINALS, SEE MECHANICAL DRAWINGS FOR ADDITIONAL DETAILS (TYPICAL), SHOWN FOR TRADE COORDINATION
RC4	EMERGENCY LIGHTING (VIF), SEE ELECTRICAL & LIFE SAFETY DRAWINGS FOR ADDITIONAL DETAILS (TYPICAL)
RC6	EXISTING CEILING TO REMAIN, PATCH AND REPAIR AS NECESSARY

GENERAL SHEET NOTES

- DO NOT SCALE DRAWINGS.
- ARCHITECTURAL DIMENSIONS SHALL ESTABLISH LIGHTING AND MECHANICAL FIXTURE LOCATIONS.
- SEE MECHANICAL AND ELECTRICAL DRAWINGS TO COORDINATE HVAC REGISTER AND LIGHTING EQUIPMENT.
- SEE STRUCTURAL DRAWINGS TO COORDINATE FLOOR PENETRATIONS AND RELATED INFORMATION.
- SEE LIGHTING PLANS FOR ELECTRICAL ELEMENTS IN CEILING.

REFLECTED CEILING PLAN KEYNOTES


- ① 2'X2' CEILING GRID IS PARTIALLY EXISTING, REPAIR AND REPLACE AS NECESSARY
- ② X
- ③ X
- ④ X
- ⑤ X

RCP SYMBOLS LEGEND

- RETURN AIR DIFFUSER (24x24)
- RETURN AIR DIFFUSER (24x48)
- SUPPLY AIR (12x12)
- SUPPLY AIR (24x24)
- EXHAUST FAN (12x12)
- EXHAUST FAN (24x24)
- SIDE WALL SUPPLY AIR DIFFUSER
- RECESSED CAN
- RECESSED PIN LIGHT
- RECESSED DIRECTIONAL LIGHT
- LAY-IN FLUORESCENT PARABOLIC (24x24)
- LAY-IN FLUORESCENT (24x24)
- LAY-IN FLUORESCENT PARABOLIC (24x48)
- LAY-IN FLUORESCENT (24x48)
- BATTERY BACK-UP EMERGENCY LIGHT
- WALL MOUNTED EMERGENCY EXIT LIGHT
- CEILING MOUNTED EMERGENCY EXIT LIGHT
- FEATURE PENDANT LIGHT
- FEATURE PENDANT LIGHT
- SURFACE MOUNTED FLUORESCENT LIGHT (24")
- SURFACE MOUNTED FLUORESCENT LIGHT (48")
- SURFACE MOUNTED LIGHT
- RECESSED SPEAKER
- WALL MOUNTED SPEAKER
- WALL SCONCE
- WALL SCONCE
- WALL SCONCE
- CEILING FAN
- CEILING FAN W/ LIGHT KIT
- FIRE SPRINKLER HEAD
- TRACK LIGHTING

REFLECTED CEILING PLAN NOTES


- ALL GRIDS SHALL BE CENTERED ON THE ROOM UNLESS OTHERWISE SPECIFIED
- HANGERS NEED TO BE INSTALLED ABOVE THE MAIN BEAMS TYPICALLY EVERY FOUR FEET.
- SNAP A CHALK LINE FOR EACH OF THE MAIN BEAMS. ATTACH HANGERS AND WIRES TO THE DECK ABOVE THE FIRST ROW OF MAIN BEAMS AT FOUR-FOOT INTERVALS.
- STRETCH A GUIDE STRING FROM ONE END OF THE ROOM TO THE OTHER, BELOW WITH MOLDING WHERE THE FIRST MAIN BEAM WILL HANG.
- STRETCH A LEVELING STRING FROM ONE SIDE TO THE OTHER 7/8" ABOVE THE BOTTOM OF THE WALL MOLDING.
- BEND THE WIRES AT THE HEIGHT OF THE STRING SO THAT THE MAIN BEAM IS HELD AT THE CORRECT HEIGHT.
- WRAP HANGER WIRE SECURELY AROUND ITSELF THREE TIMES.
- ALL LIGHT FIXTURES SHALL BE INDEPENDENTLY SUPPORTED WITH WIRES PLACED DIAGONALLY FROM EACH CORNER OF THE LIGHT FIXTURE.
- VERIFY AND INSTALL ALL LIGHTING AND CEILING MATERIALS AS PER MANUFACTURES SPECIFICATIONS.
- EMERGENCY (EM) LUMINARIES SHALL BE CIRCUITED WITH AN "UNSWITCHED HOT" TO PROVIDE CONTINUOUS POWER TO BATTERY PACK EVEN WHEN LUMINAIRE IS OFF.
- ALL NIGHT-LIGHT (NL) LUMINARIES SHALL BE CIRCUITED AHEAD OF ANY SWITCHING
- IT SHALL BE THE G.C.'S RESPONSIBILITY TO UNLOAD INVENTORY AND STORE LIGHTING PACKAGE. THE G.C. SHALL ALSO SHIP ANY EXCESS MATERIALS BACK TO THE ELECTRICAL PACKAGE DISTRIBUTOR.
- EXIT LIGHTS AT SHALL BE CEILING MOUNTED AND CENTERED OVER OPENINGS. IF PLAN LOCATIONS ARE NOT ACCEPTABLE, IMMEDIATELY CONTACT MY SALON SUITE PROJECT MANAGER FOR DIRECTION.
- WHERE DRYWALL CEILINGS ARE USED, G.C. SHALL ARRANGE CIRCUITS TO AVOID THE USE OF JUNCTION BOXES IN INACCESSIBLE LOCATIONS. THE USE OF JUNCTION BOXES ABOVE DRYWALL CEILINGS SHALL BE LIMITED TO LOCATIONS NEAR ACCESS FRAMES USED FOR DIFFUSERS AND RETURN AIR GRILLES OR ACCESS PANELS LOCATED ON PLANS. IF PLAN LOCATION IS NOT ACCEPTABLE, IMMEDIATELY CONTACT MY SALON SUITE PROJECT MANAGER FOR DIRECTION.
- SWITCH INDIVIDUAL ROOM LIGHT FIXTURES SEPARATELY & OPEN AREAS TOGETHER. SEE ELECTRICAL DRAWINGS
- FOR CEILING SPECIFICATIONS, SEE RCP
- FOR NIGHT LIGHTING, SEE ELECTRICAL DRAWINGS.
- FOR HVAC SUPPLY / RETURN GRILLES & EXHAUST FANS, SEE MECHANICAL DRAWINGS
- ADEQUATE ACCESS PANELS OR DOORS SHALL BE INCORPORATED INTO TENANT WORK FOR INSPECTION SERVICE AND REPLACEMENT OF BOTH, LANDLORD AND TENANT EQUIPMENT. COORDINATE PLACEMENT WITH LANDLORD'S ON-SITE REPRESENTATIVE.

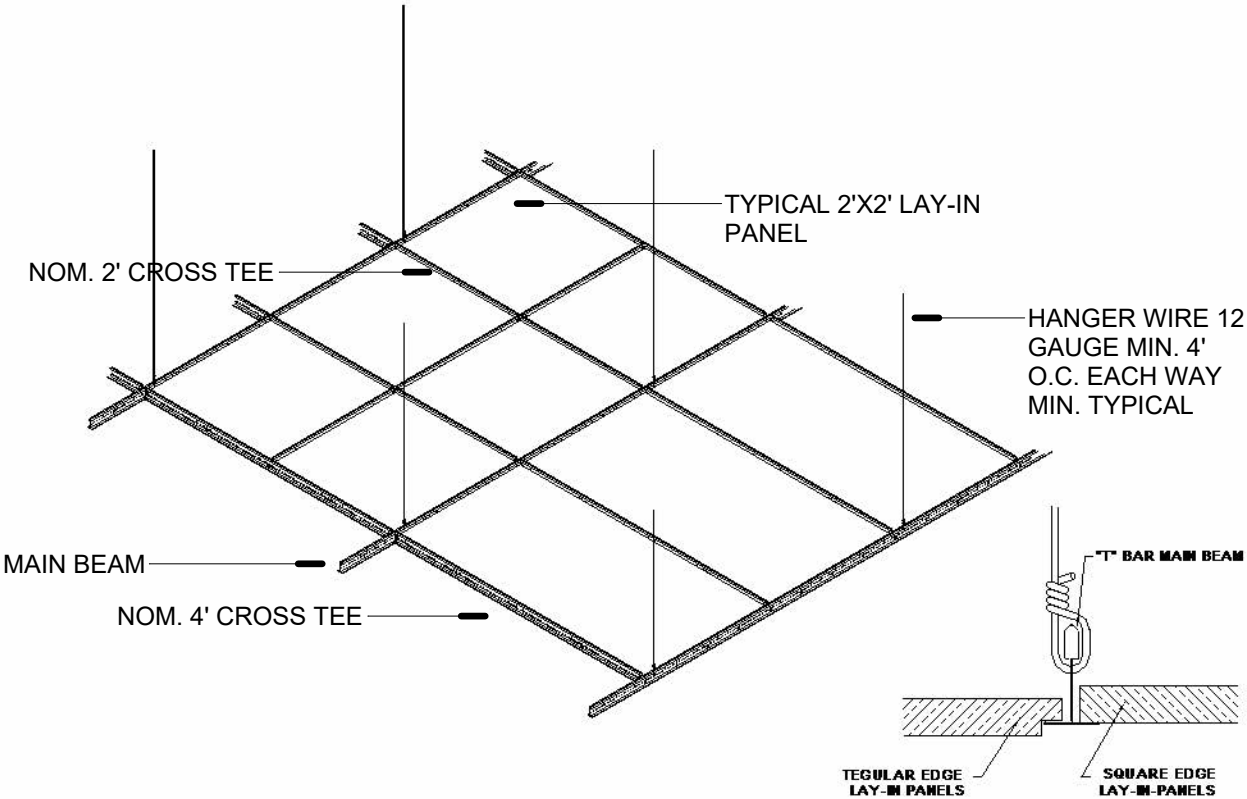

- ② RCP DETAIL
3/8" = 1'-0"

REFLECTED CEILING PLAN KEYED NOTES

- ① 5/8" MR. GYP. BD. CEILING AT 10'-0" AFF.
- ② EXISTING GRID TO REMAIN, PATCH AND REPAIR AS NEEDED

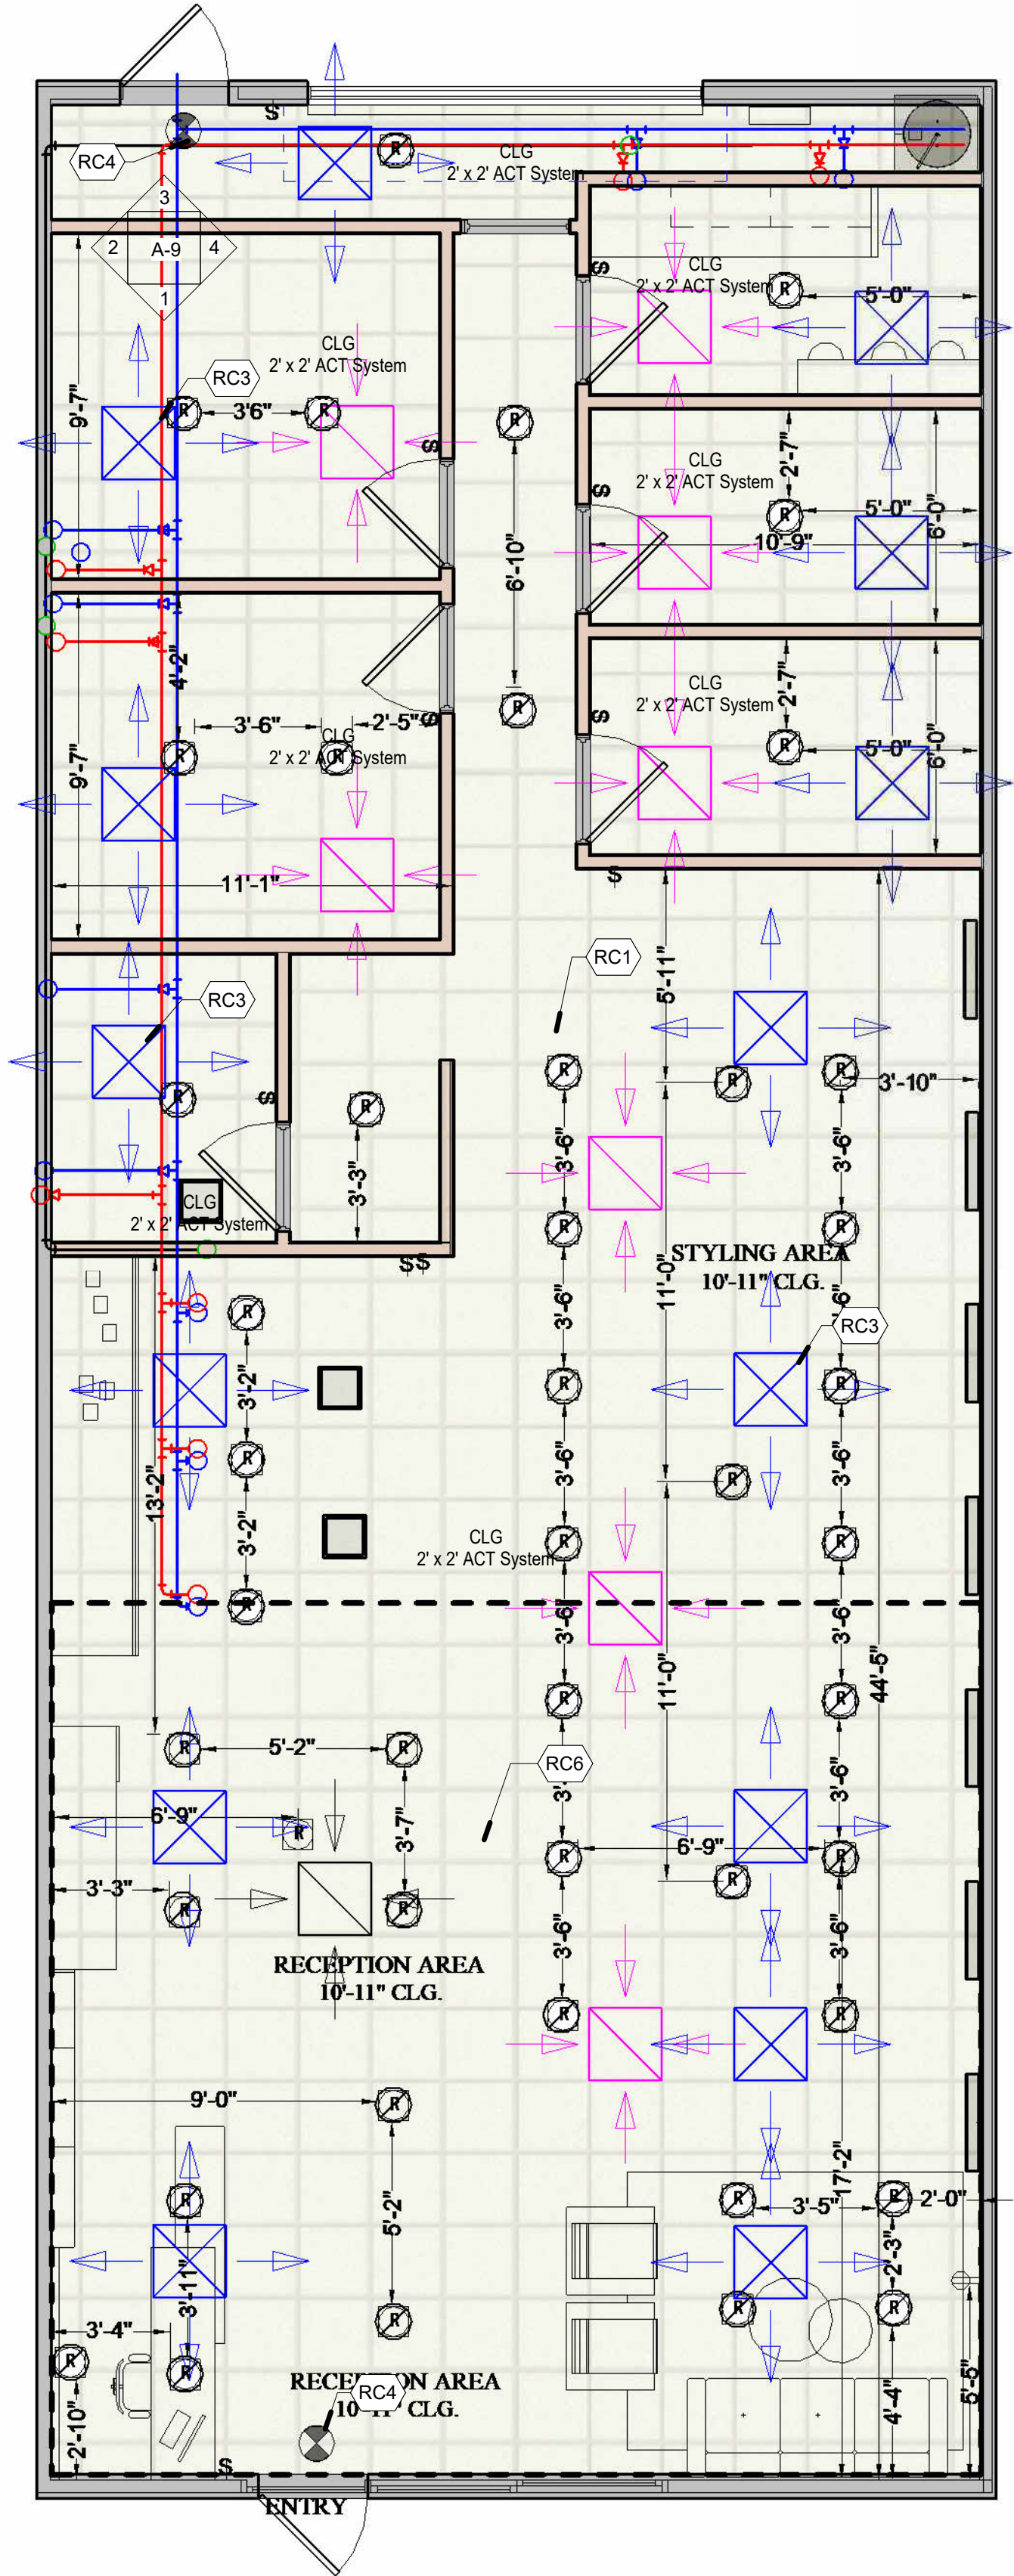

① PROPOSED REFLECTD CEILING PLAN
1/4" = 1'-0"

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT


REFLECTED CEILING

SHEET: 3 of 18


SHEET NUMBER

A-3


L ARCHITECTURE

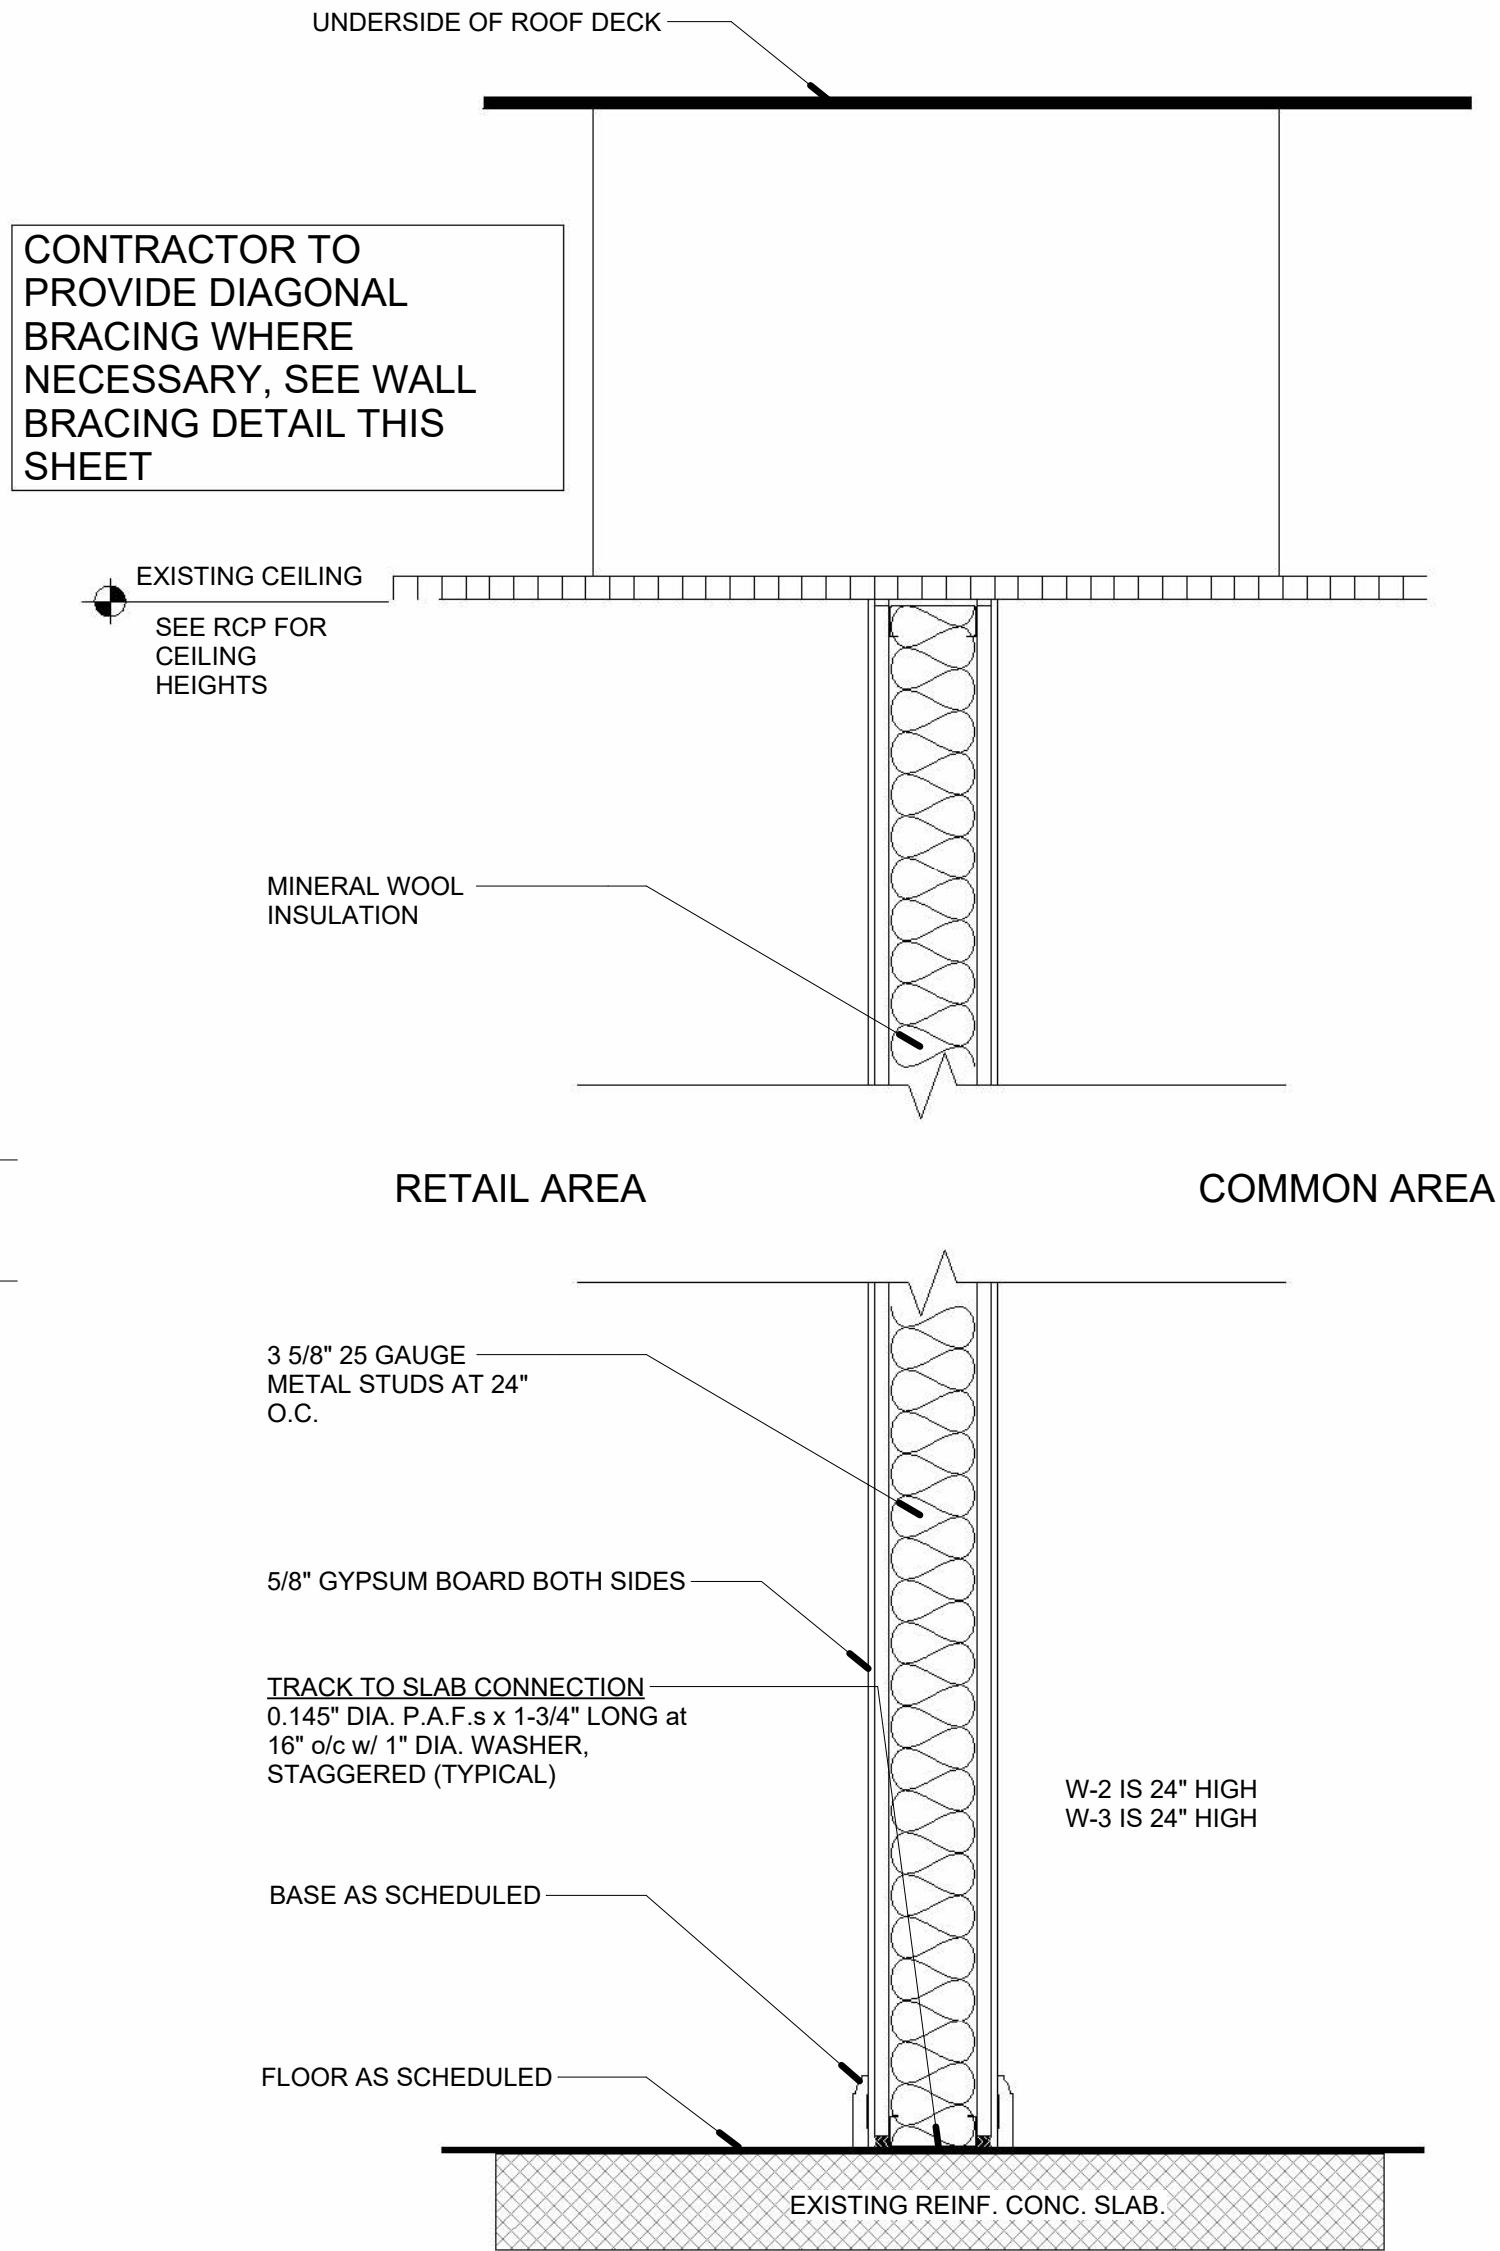

1 TYP INTERIOR WALL TYPE #W3
1 1/2" = 1'-0"

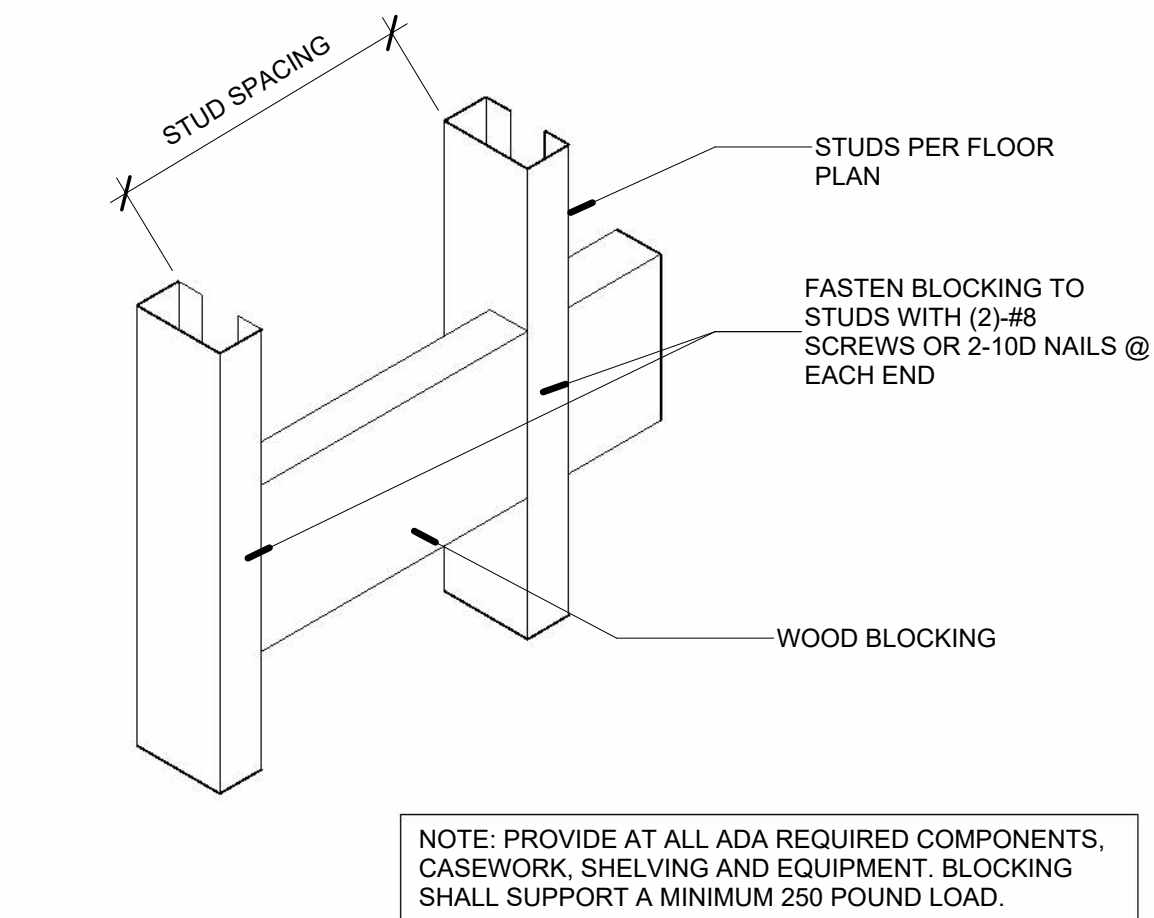

13 Wall Backing Detail
1/4" = 1'-0"

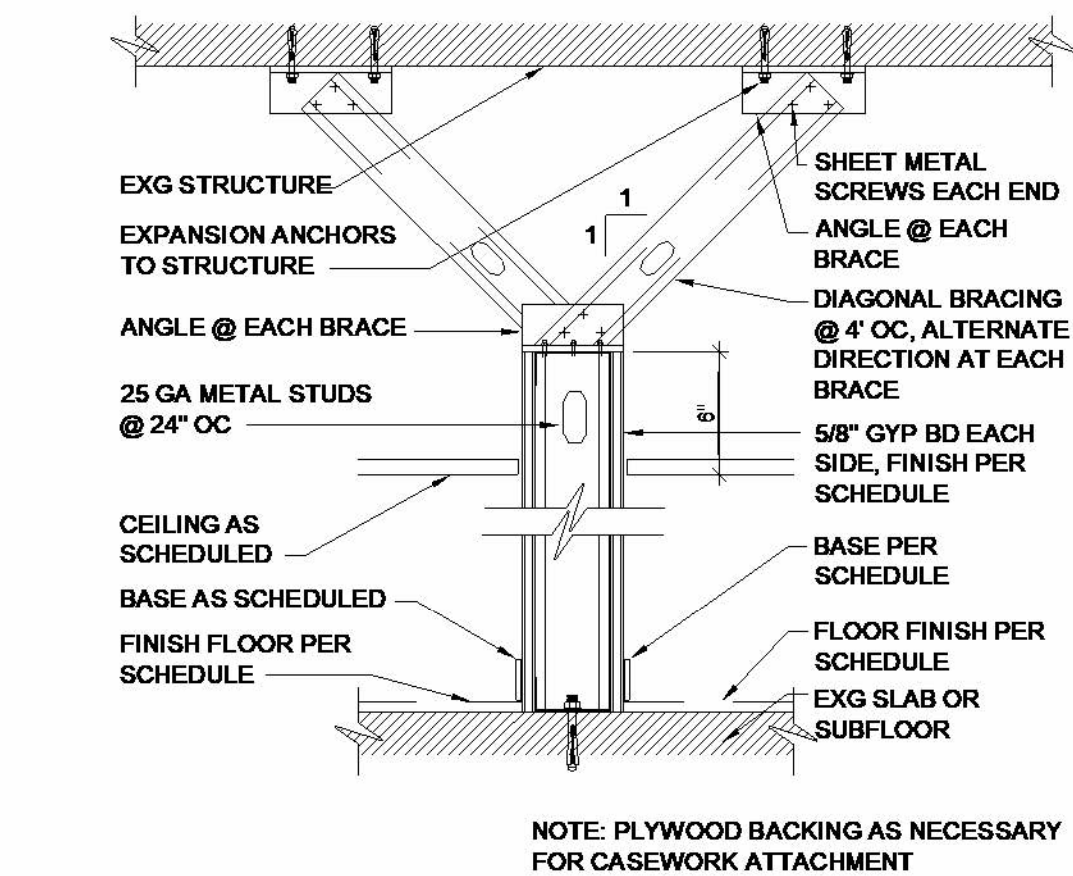


2 WALL BRACING
12" = 1'-0"


STUD SPACING		
3 5/8" METAL STUD SPECIFICATION		
GAUGE	SPACING	HEIGHT @ L/240
25	24" O.C.	13'-5"
25	16" O.C.	14'-4"
20	24" O.C.	14'-9"
20	16" O.C.	16'-5"
6" METAL STUD SPECIFICATION		
GAUGE	SPACING	HEIGHT @ L/240
25	24" O.C.	16'-9"
25	16" O.C.	19'-9"
20	24" O.C.	21'-7"
20	16" O.C.	24'-6"

PARTITION GENERAL NOTES


- SEE ELEVATIONS AND FINISH SCHEDULE FOR APPLIED FINISHES SUCH AS CERAMIC TILE, FABRIC WALL COVERINGS, PANELING, ETC.
- STANDARD STUD SIZE SHALL BE 3 5/8" 20 GA SSMA DES 362 S 137-33 U.N.O.
- WHERE MANUFACTURER'S HEIGHT LIMITATIONS ARE EXCEEDED DUE TO FIELD CONDITIONS, USE HEAVIER GAUGE STUDS IN ACCORDANCE W/ MANUFACTURER'S RECOMMENDATIONS.
- ALL INTERIOR PARTITION INSULATION TO BE MINERAL FIBROUS SOUND ABSORBING INSULATION U.N.O.

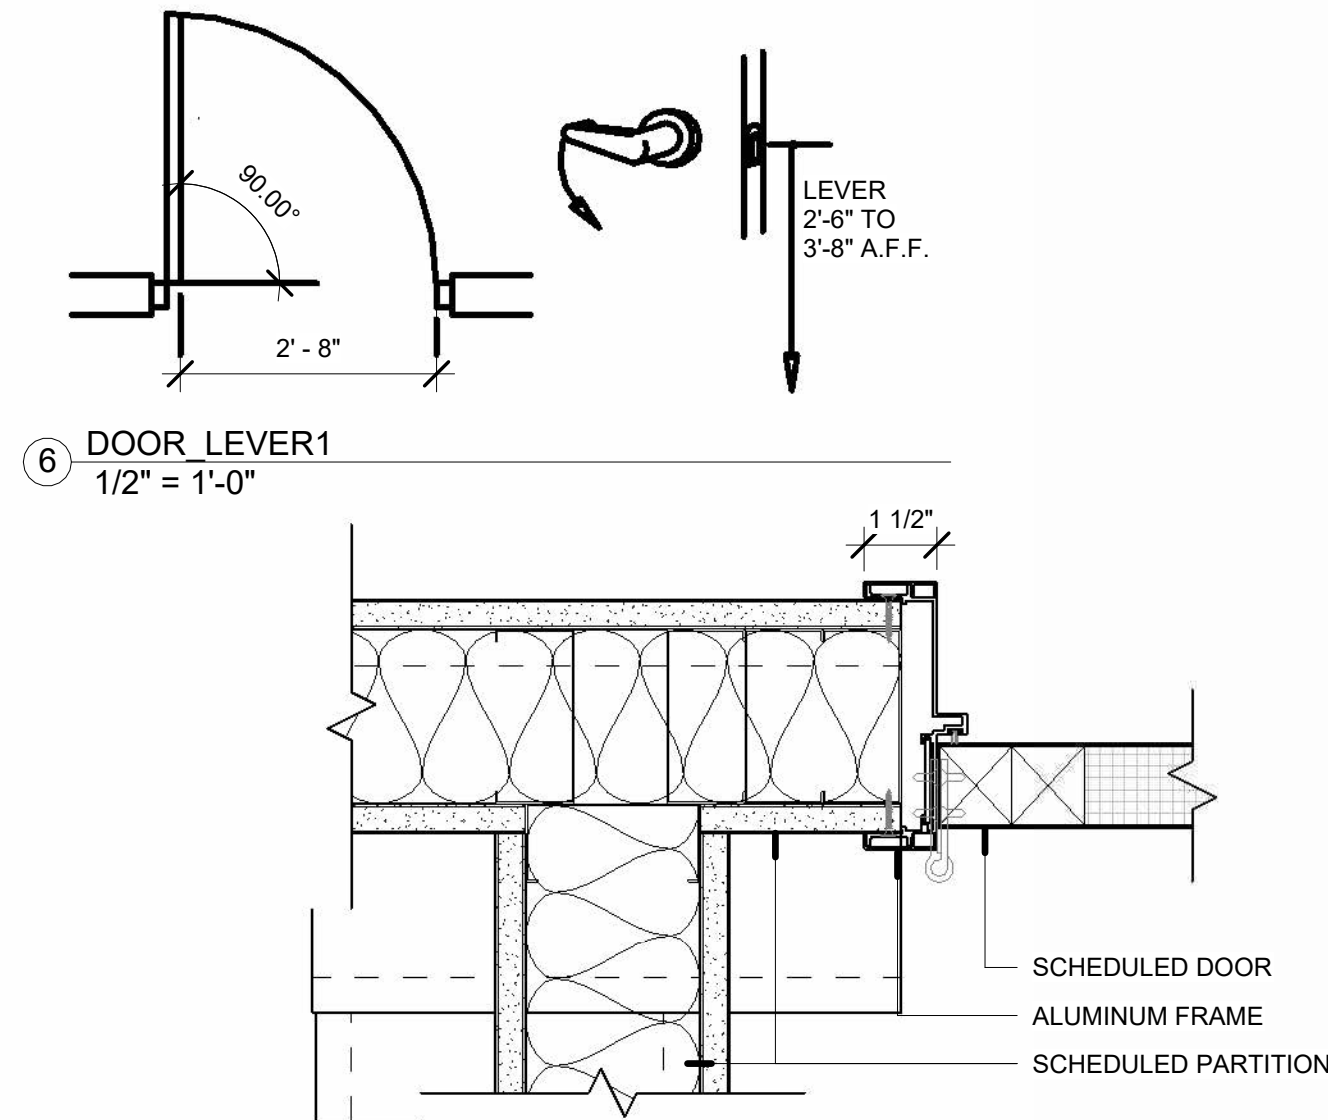


6 DOOR LEVER
1/2" = 1'-0"

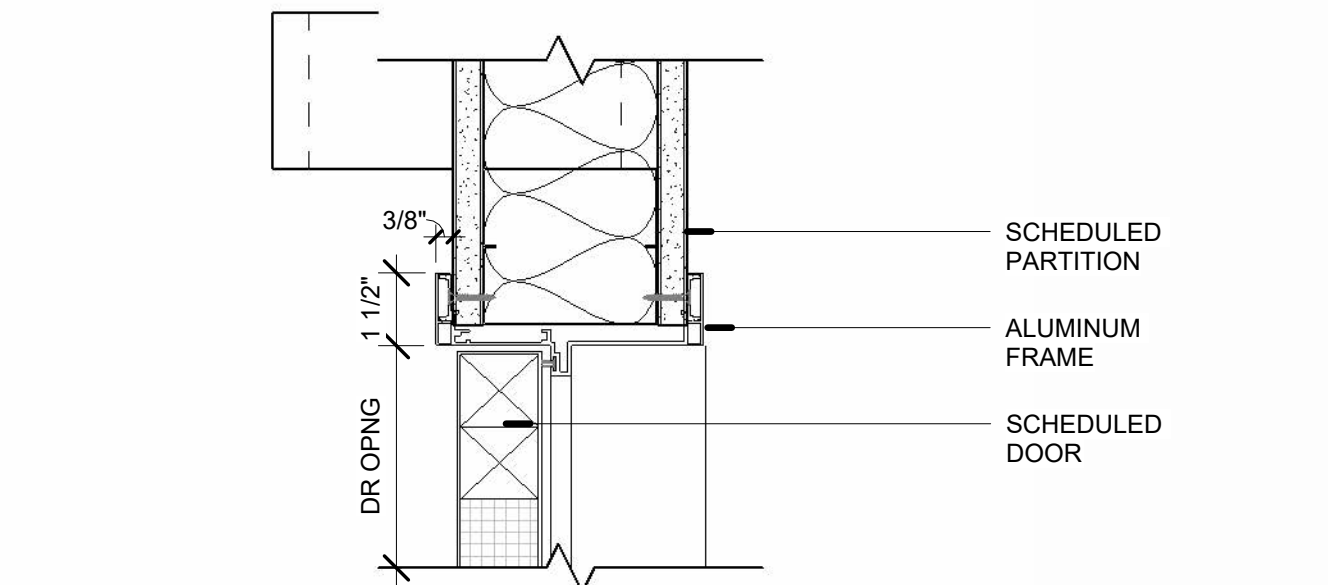

7 HEAD @ STANDARD DOOR
3" = 1'-0"

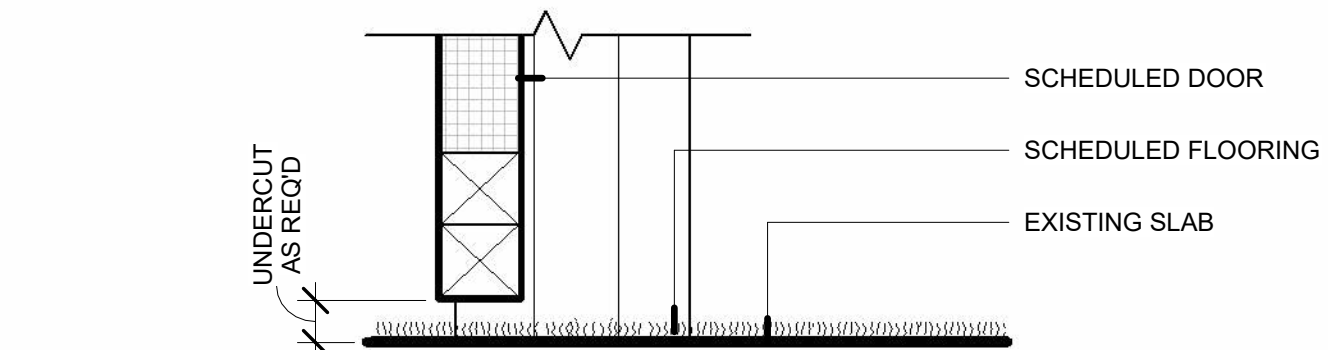

4 SILL @ STANDARD DOOR
3" = 1'-0"

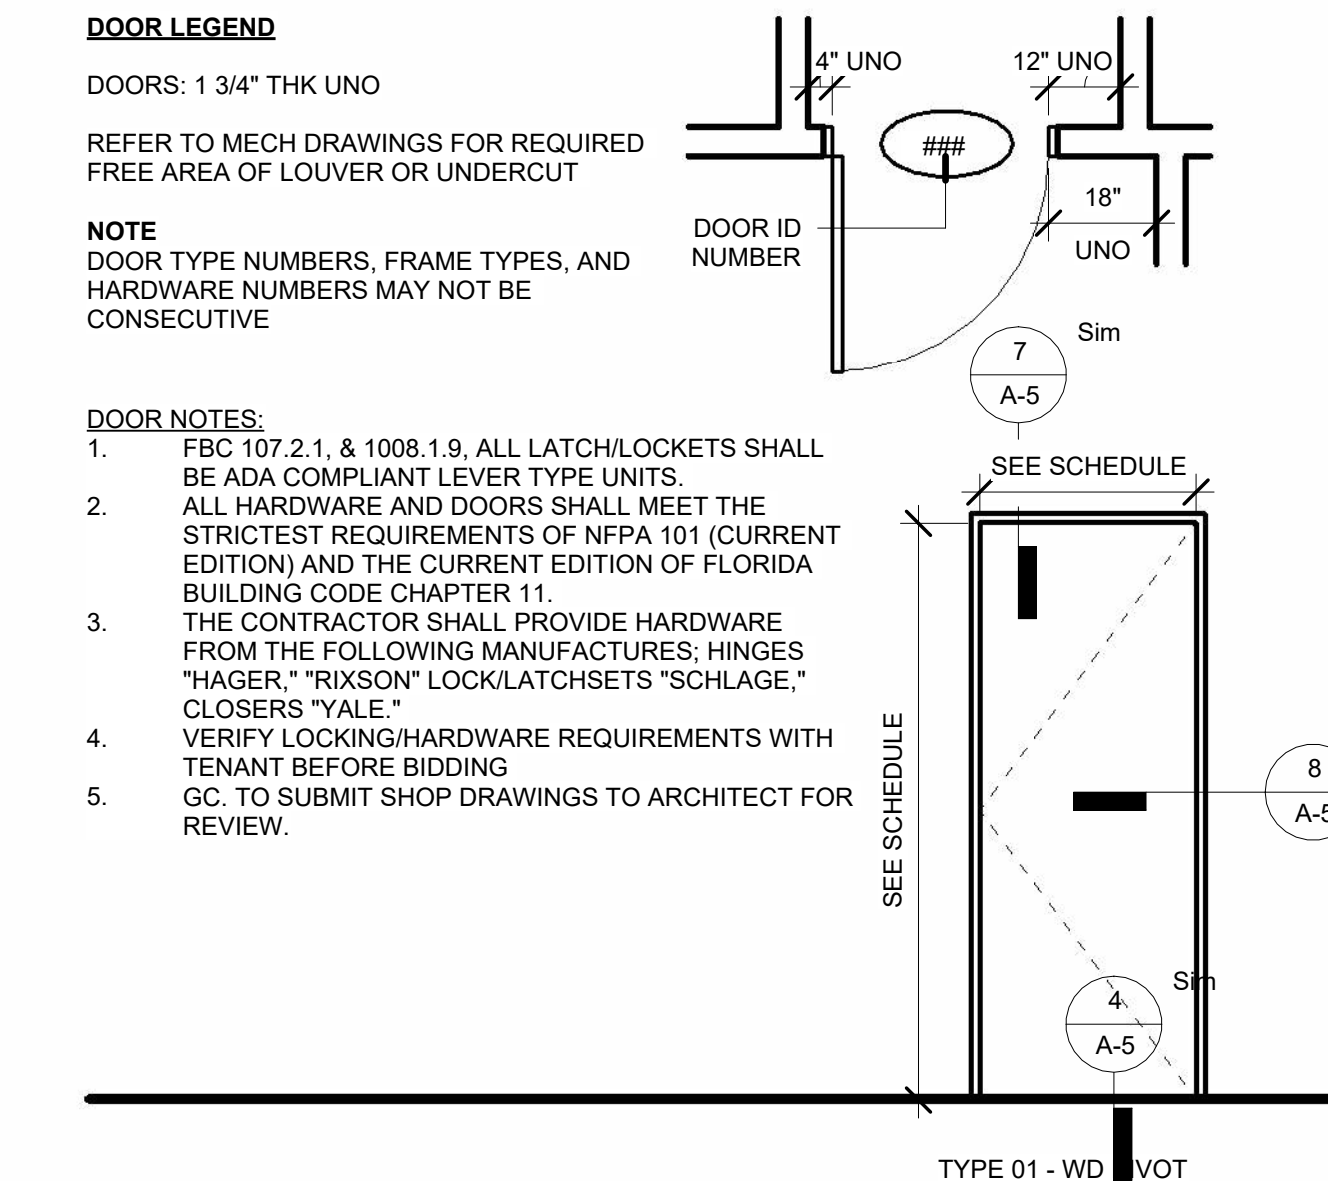

9 DOOR TYPES & LEGEND
3/8" = 1'-0"

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
No.	Description	Date

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

CONSTRUCTION
DETAILS

SHEET: 4 of 18

SHEET NUMBER

A-5



L ARCHITECTURE

1. ALL GUEST ROOMS, MEETING ROOMS, TOILET ROOMS, AND OTHER COMMON AREA ROOMS SHOULD PROVIDE SIGNAGE IN COMPLIANCE WITH GUIDELINES 3,4,5,6 AND 7 BELOW.
2. DIRECTIONAL SIGNAGE - MUST BE LOCATED AT AN INACCESSIBLE ELEMENT WHICH DIRECTS INDIVIDUALS WITH DISABILITIES TO THE NEAREST ACCESSIBLE ELEMENT.
3. CHARACTER PROPORTION - LETTERS AND NUMBERS ON SIGNS SHALL HAVE A WIDTH TO HEIGHT RATIO BETWEEN 1:5 AND 1:10.
4. CHARACTER HEIGHT - CHARACTERS AND NUMBERS ON SIGNS SHALL BE SIZED ACCORDING TO THE VIEWING DISTANCE FROM WHICH THEY ARE TO BE READ. THE MINIMUM CHARACTER HEIGHT SHOULD BE THREE INCHES.
5. RAISED AND BRAILLE CHARACTERS AND PICTORIAL SYMBOLS (PICTOGRAMS) - LETTERS AND NUMERALS SHALL BE RAISED 1/32", UPPER CASE, SANS SERIF OR SIMPLE SERIF TYPE AND SHALL BE ACCOMPANIED WITH GRADE 2 BRAILLE. RAISED CHARACTERS SHALL BE AT LEAST 5/8" HIGH, BUT NO HIGHER THAN TWO INCHES. PICTOGRAMS SHALL BE ACCOMPANIED BY THE EQUIVALENT VERBAL DESCRIPTION PLACED DIRECTLY BELOW THE PICTOGRAMS. THE BORDER DIMENSION OF THE PICTOGRAM SHALL BE SIX INCHES MINIMUM IN HEIGHT.
6. FINISH AND CONTRAST - THE CHARACTERS AND BACKGROUND OF SIGNS SHALL BE EGGSHELL, MATTE OR OTHER NO GLARE FINISH. CHARACTERS AND SYMBOLS SHALL CONTRAST WITH THEIR BACKGROUND - EITHER LIGHT CHARACTERS ON A DARK BACKGROUND OR DARK CHARACTERS ON A LIGHT BACKGROUND.
7. MOUNTING LOCATION AND HEIGHT - WHERE PERMANENT IDENTIFICATION IS PROVIDED FOR ROOMS AND SPACES, SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR. WHERE THERE IS NO WALL SPACE TO THE LATCH SIDE OF THE DOOR, INCLUDING AT DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL. MOUNTING HEIGHT SHALL BE 50" ABOVE THE FINISHED FLOOR TO THE CENTERLINE OF THE SIGN. MOUNTING LOCATION FOR SUCH SIGNAGE SHALL BE SO THAT A PERSON MAY APPROACH WITHIN THREE INCHES OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF THE DOOR.
8. FLORIDA PARKING - TO PROVIDE ACCESSIBLE SIGNAGE AT FLORIDA PARKING SPACES, PLEASE REFER TO THE FLORIDA ACCESSIBLE PARKING SPACES REQUIREMENTS.



1. Grab bars at side of accessible water closets shall be 42" long and shall begin 12" away from wall of water closet.
2. Grab bars behind accessible water closets shall be 36" long and shall be located centered on water closet.
3. Grab bars shall be 33" to 36" above floor, 1-1/4" to 1-1/2" O.D. and shall be 1-1/2" away from wall surface.
4. Grab bars shall be designed and secured to support the weight of 250 pounds. Grab bars may be one-piece, "L" shaped type.
5. Accessible lavatories shall be mounted so that rim of the lavatory (or the top counter surface in the case of a vanity counter) is no higher than 34" above floor surface. Provide bottom clearance of at least 29" from floor surface to underside of a lavatory or a vanity apron.
6. Exposed hot water and drain piping below lavatories shall be insulated or otherwise covered in order to prevent a person's legs from being burned.
7. Faucets shall be lever type or push type only.
8. Mirrors above lavatories shall be mounted with their bottom edge no higher than 40" above the floor surface.
9. Accessible water closets shall have seats which are 17" to 19" above the floor surface.
10. Controls for flush valves shall be mounted on the wide side of toilet areas no more than 44" above the floor.
11. Accessible urinals shall be stall-type or wall hung with an elongated rim at a maximum height of 17" above floor surface.

-
- The image contains four technical drawings labeled (A), (B), (C), and (D), illustrating the installation of corner bead and track connections.
- (A) CORNER BEAD:** Shows a cross-section of a corner joint. Two vertical metal studs are spaced at 16" O.C. A 5/8" gypsum board is applied over the studs. A corner bead is applied to the exterior corner. A callout points to the joint compound.
 - (B) CORNER BEAD:** Shows a cross-section of a corner joint. Two vertical metal studs are spaced at 16" O.C. A 5/8" gypsum board is applied over the studs. A corner bead is applied to the exterior corner. A callout points to the joint compound.
 - (C) CORNER BEAD:** Shows a cross-section of a corner joint. Two vertical metal studs are spaced at 16" O.C. A 5/8" gypsum board is applied over the studs. A corner bead is applied to the exterior corner. A callout points to the joint compound.
 - (D) TRACK TO SLAB CONNECTION:** Shows a cross-section of a track connection. A 5/8" gypsum board is applied over the studs. A track is applied over the gypsum board. A callout points to the track to slab connection.



2 ADA TOILET ACCESSIBILITY NOTES

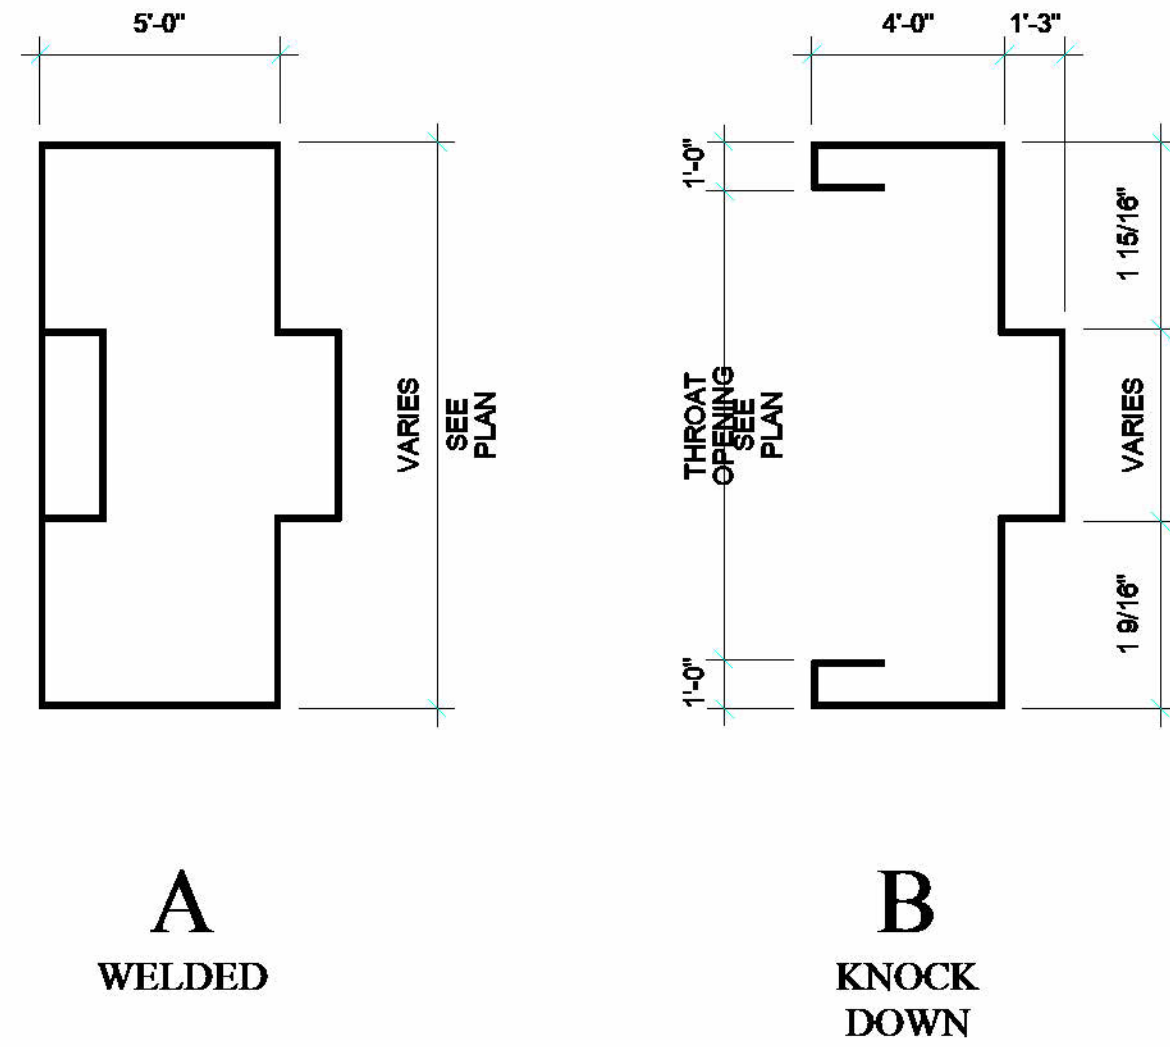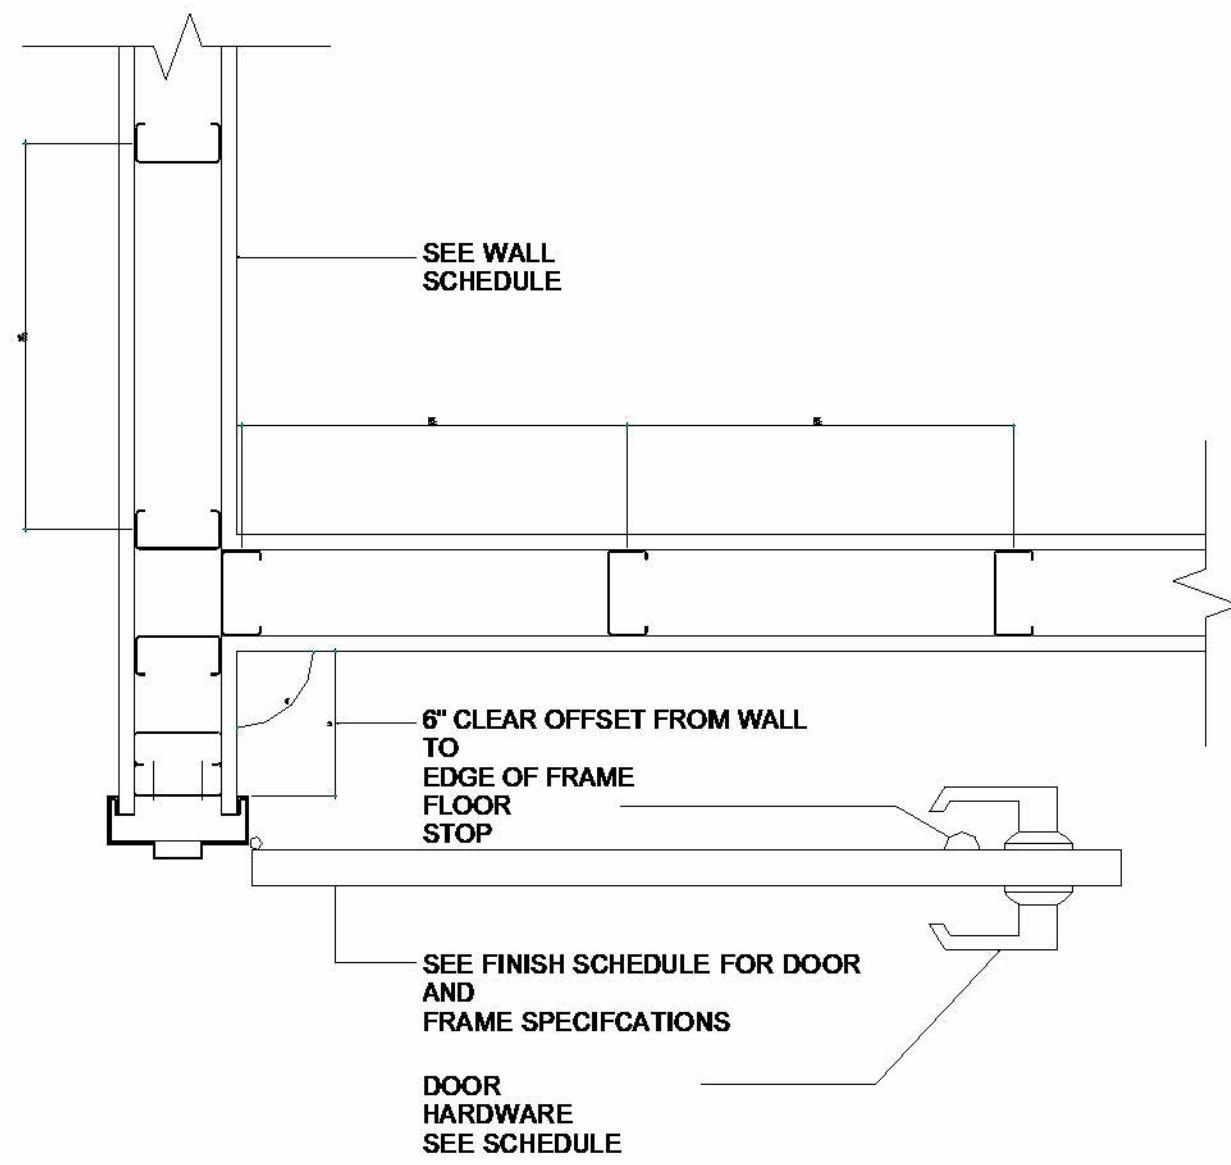


- MOUNTING LOCATION AND HEIGHT - WHERE PERMANENT IDENTIFICATION IS PROVIDED FOR ROOMS AND SPACES, SIGNS SHALL BE INSTALLED ON THE WALL ADJACENT TO THE LATCH SIDE OF THE DOOR. WHERE THERE IS A WALL SPACE TO THE LATCH SIDE OF THE DOOR, INCLUDING AT DOUBLE LEAF DOORS, SIGNS SHALL BE PLACED ON THE NEAREST ADJACENT WALL. MOUNTING HEIGHT SHALL BE 50" ABOVE THE FINISHED FLOOR TO THE CENTERLINE OF THE SIGN. MOUNTING LOCATION FOR SUCH SIGNAGE SHALL BE SO THAT A PERSON MAY APPROACH WITHIN THREE INCHES OF SIGNAGE WITHOUT ENCOUNTERING PROTRUDING OBJECTS OR STANDING WITHIN THE SWING OF THE DOOR.

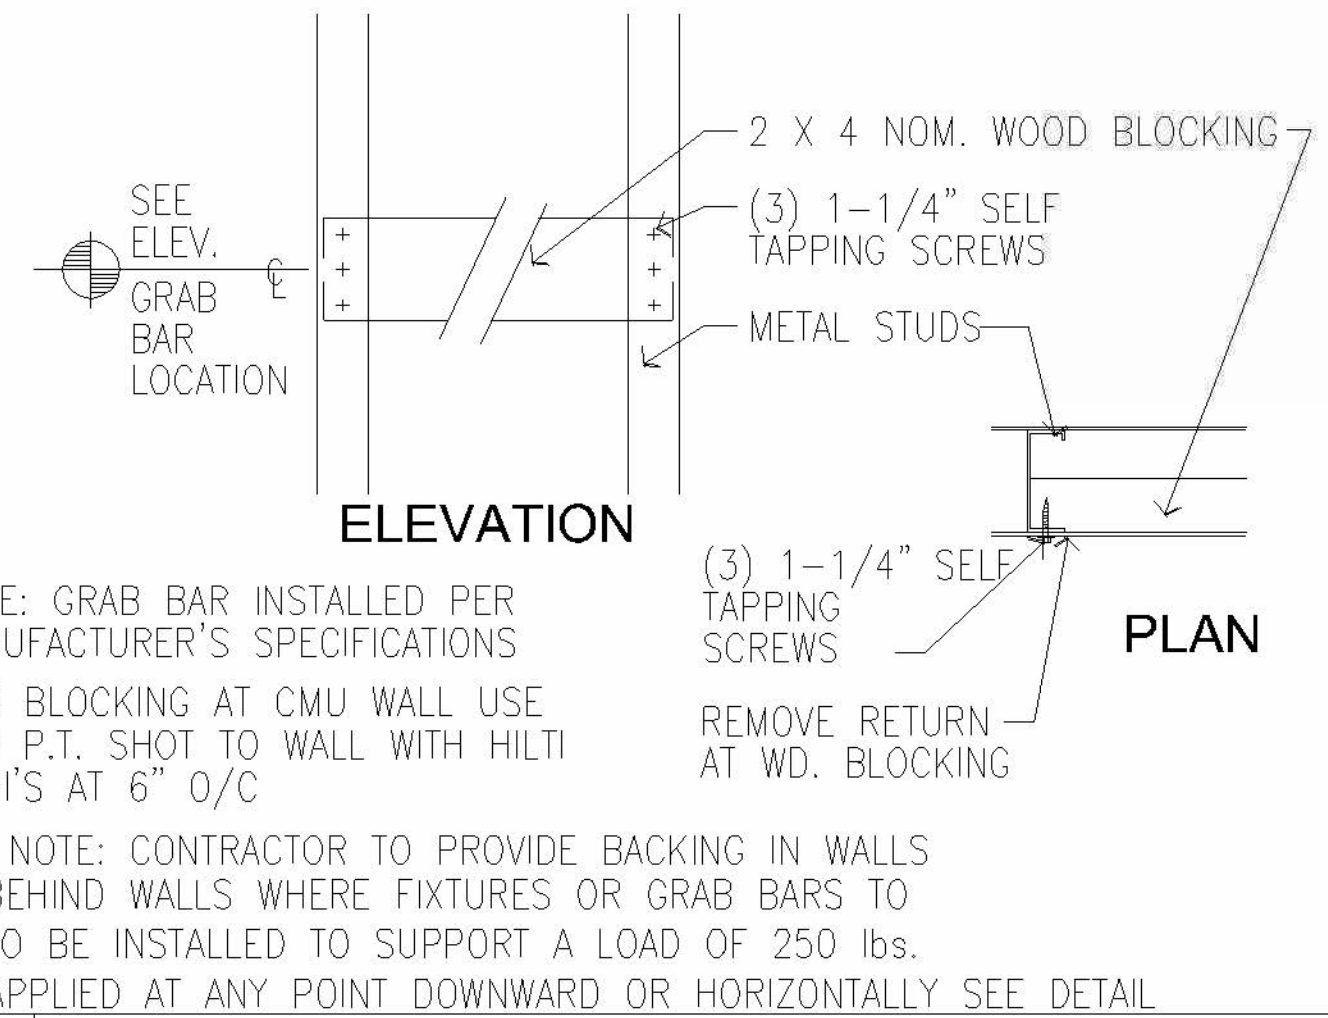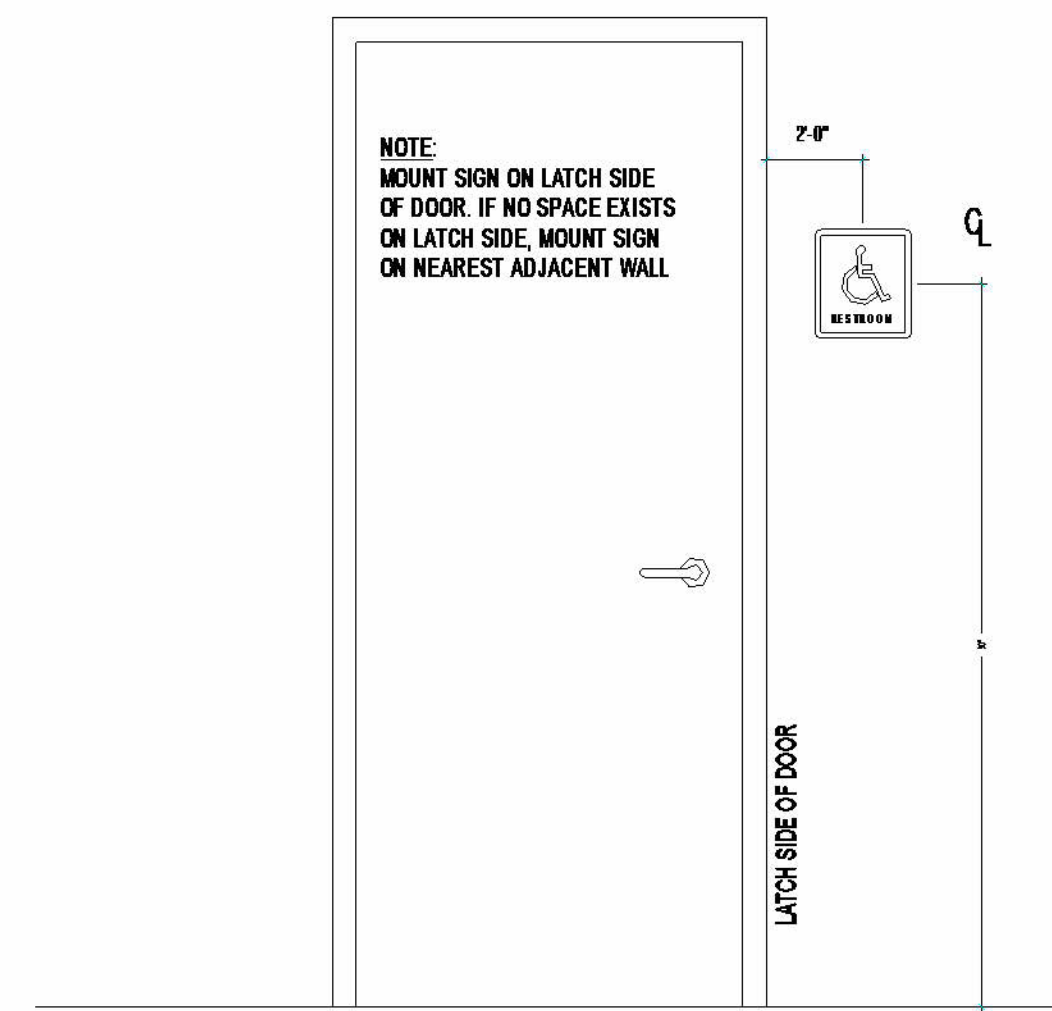

6 TYPICAL FRAME PROFILES

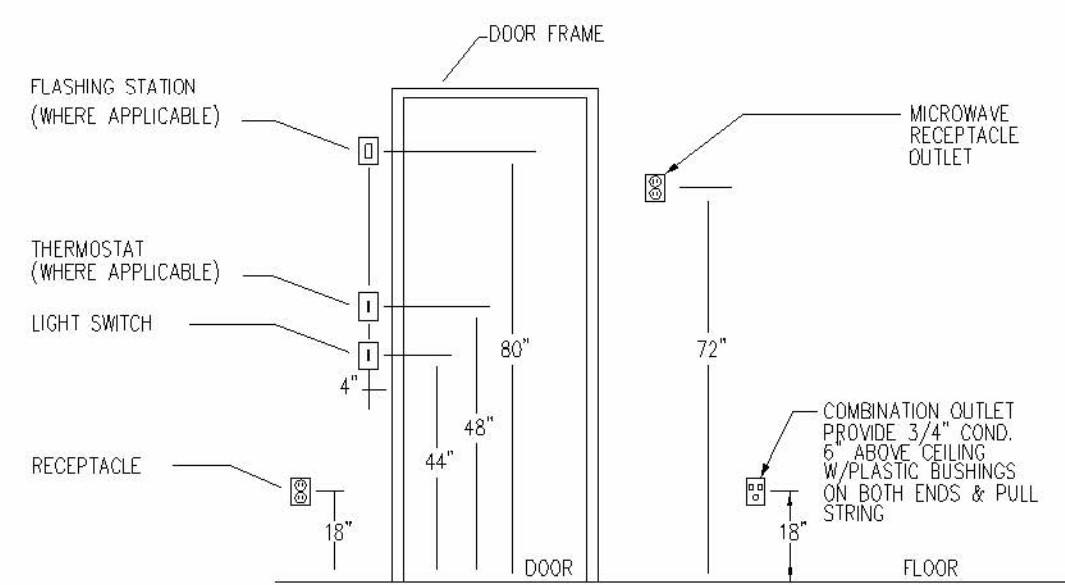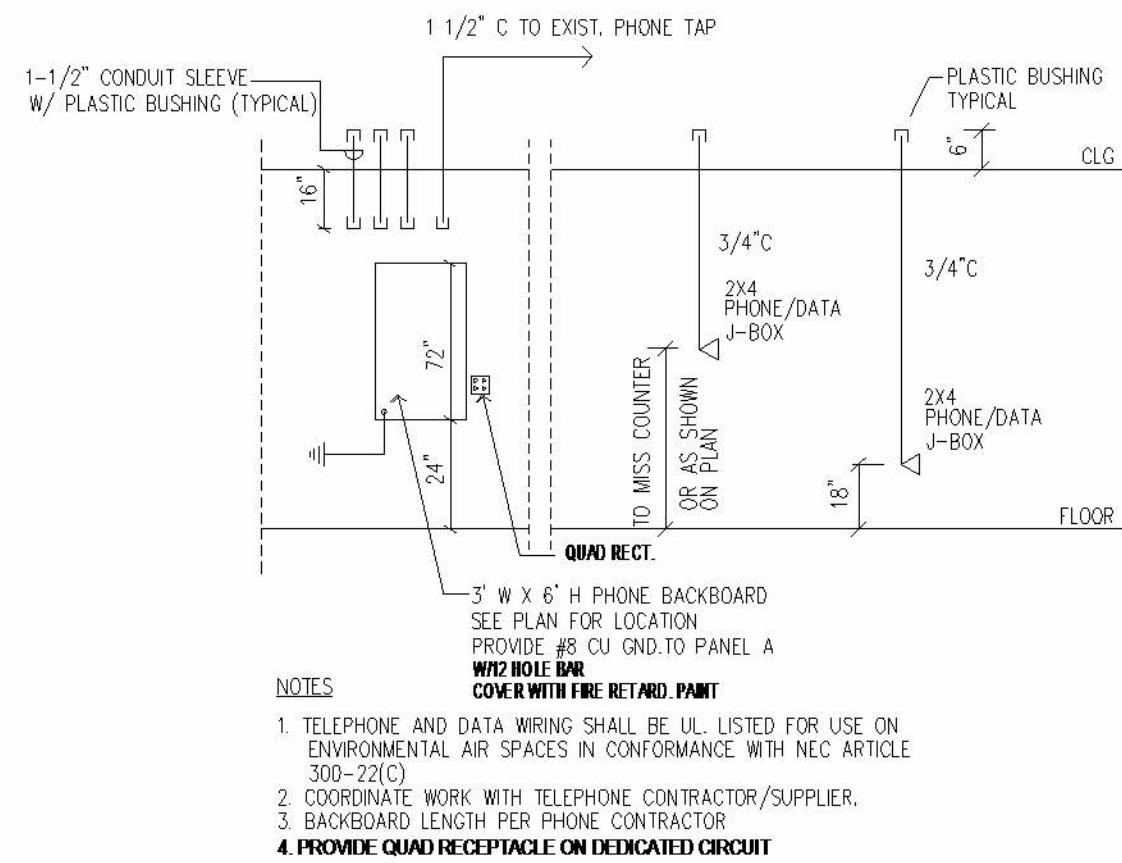

-

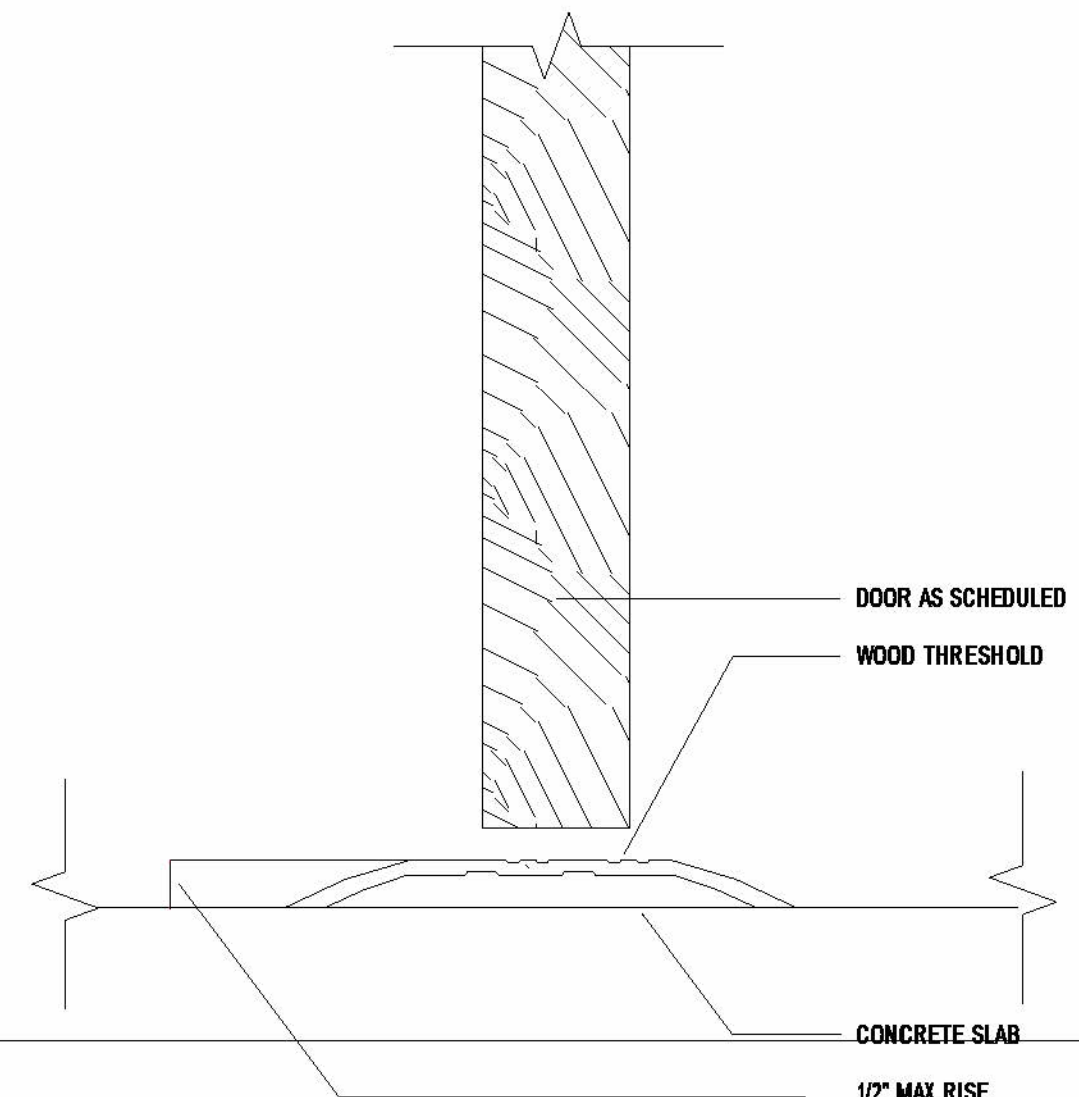

10 | **DEVICE INSTALLATION DETAIL**
SCALE: N.T.S.

- 12 DOOR THRESHOLD DETAIL
SCALE: 6" = 1'-0"

USED FOR: *** FOR PERMIT ***

TRANSACTIONS		
NO.	DESCRIPTION	DATE

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

CONSTRUCTION DETAILS


SHEET: 5 of 18

SHEET NUMBER

A-6


ARCHITECTURE

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXISTS BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

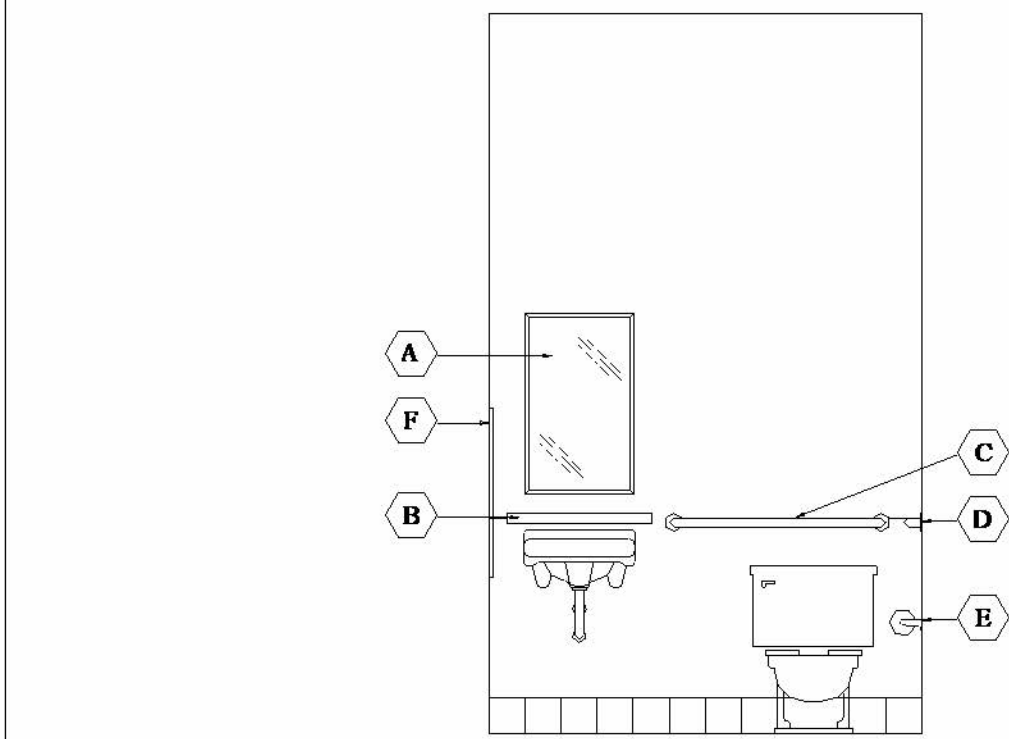


ITEM	MFR.	MFR. NO.	ITEM DESCRIPTION
A	BOBRICK	B-293 1830	TILT MIRROR
B	BOBRICK	B-2017	SOAP SHELF COMBINATION UNIT
C	BOBRICK	B-6806x36" (68" Lx4")	HANDCAP GRAB BAR
D	BOBRICK	B-6806x42"	HANDCAP GRAB BAR
E	BOBRICK	B-4388	TOILET PAPER HOLDER
F	BOBRICK	B-4369	PAPER TOWEL DISPENSER/WASTE RECEPTILE
G	-	-	IMPERVIOUS FINISH


14 TYPICAL TOILET ROOM ELEVATION
SCALE: N.T.S.

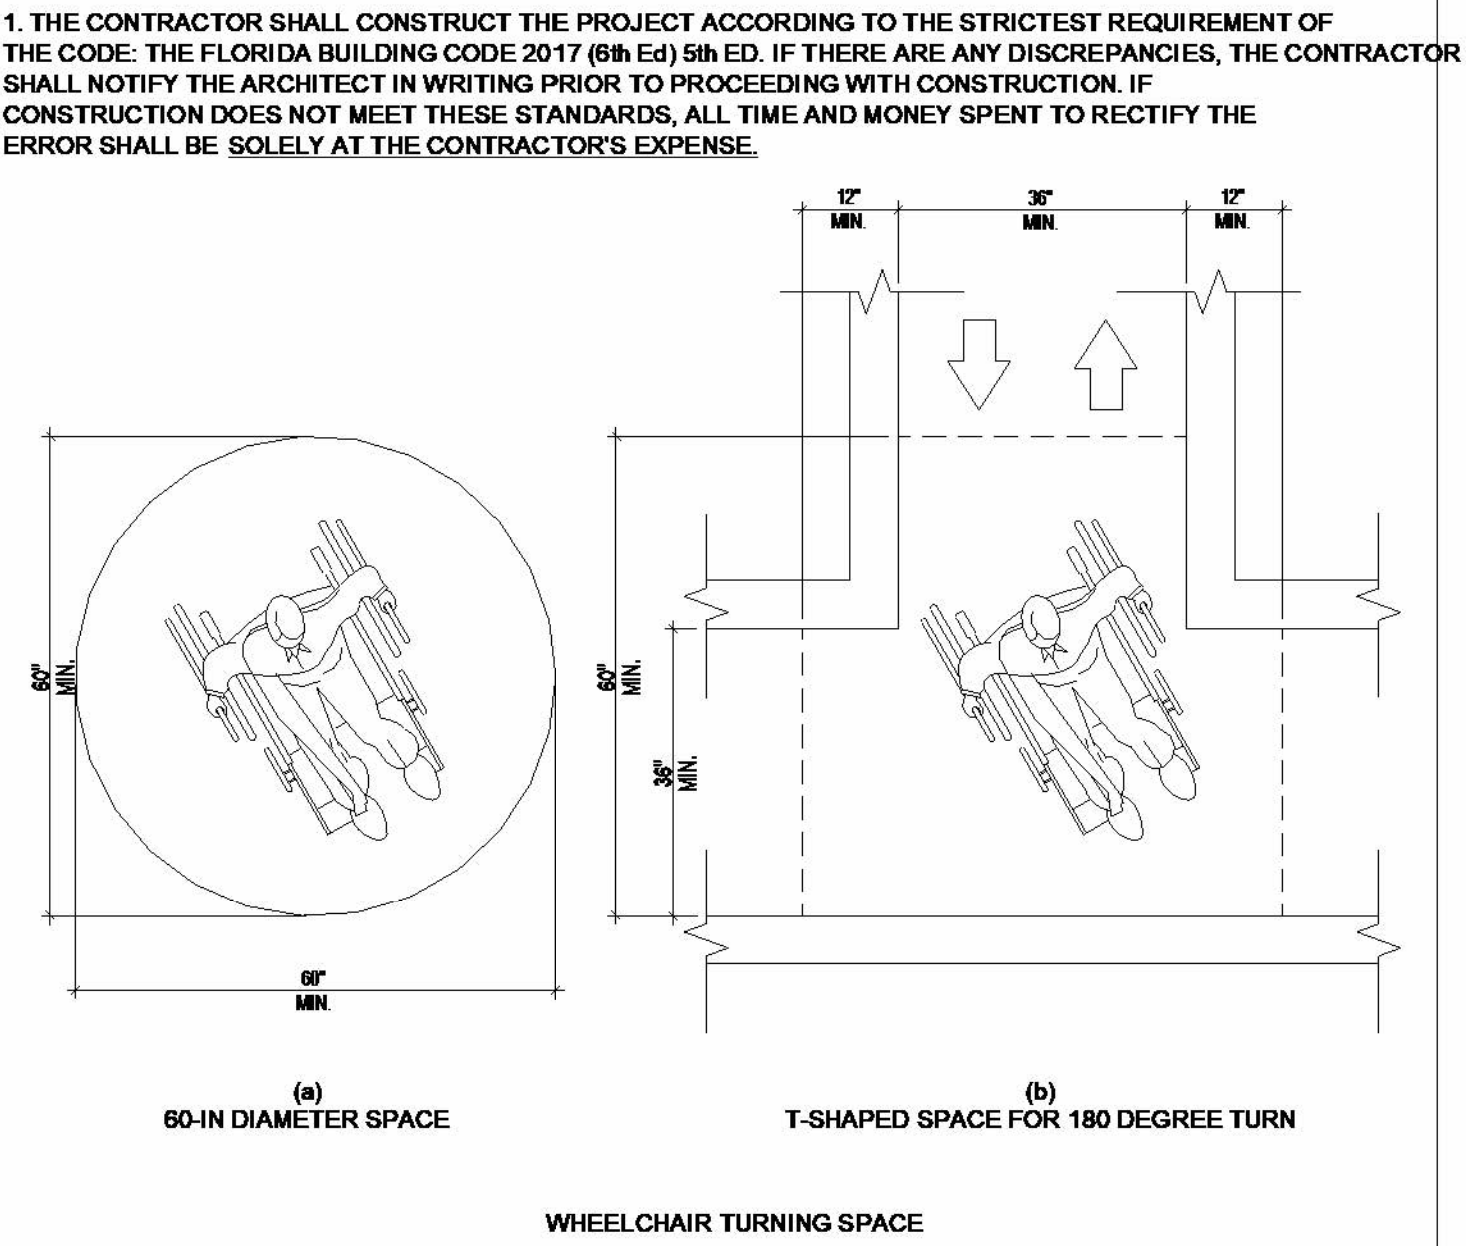


15 FLORIDA ACCESSIBILITY CODE
SCALE: N.T.S.

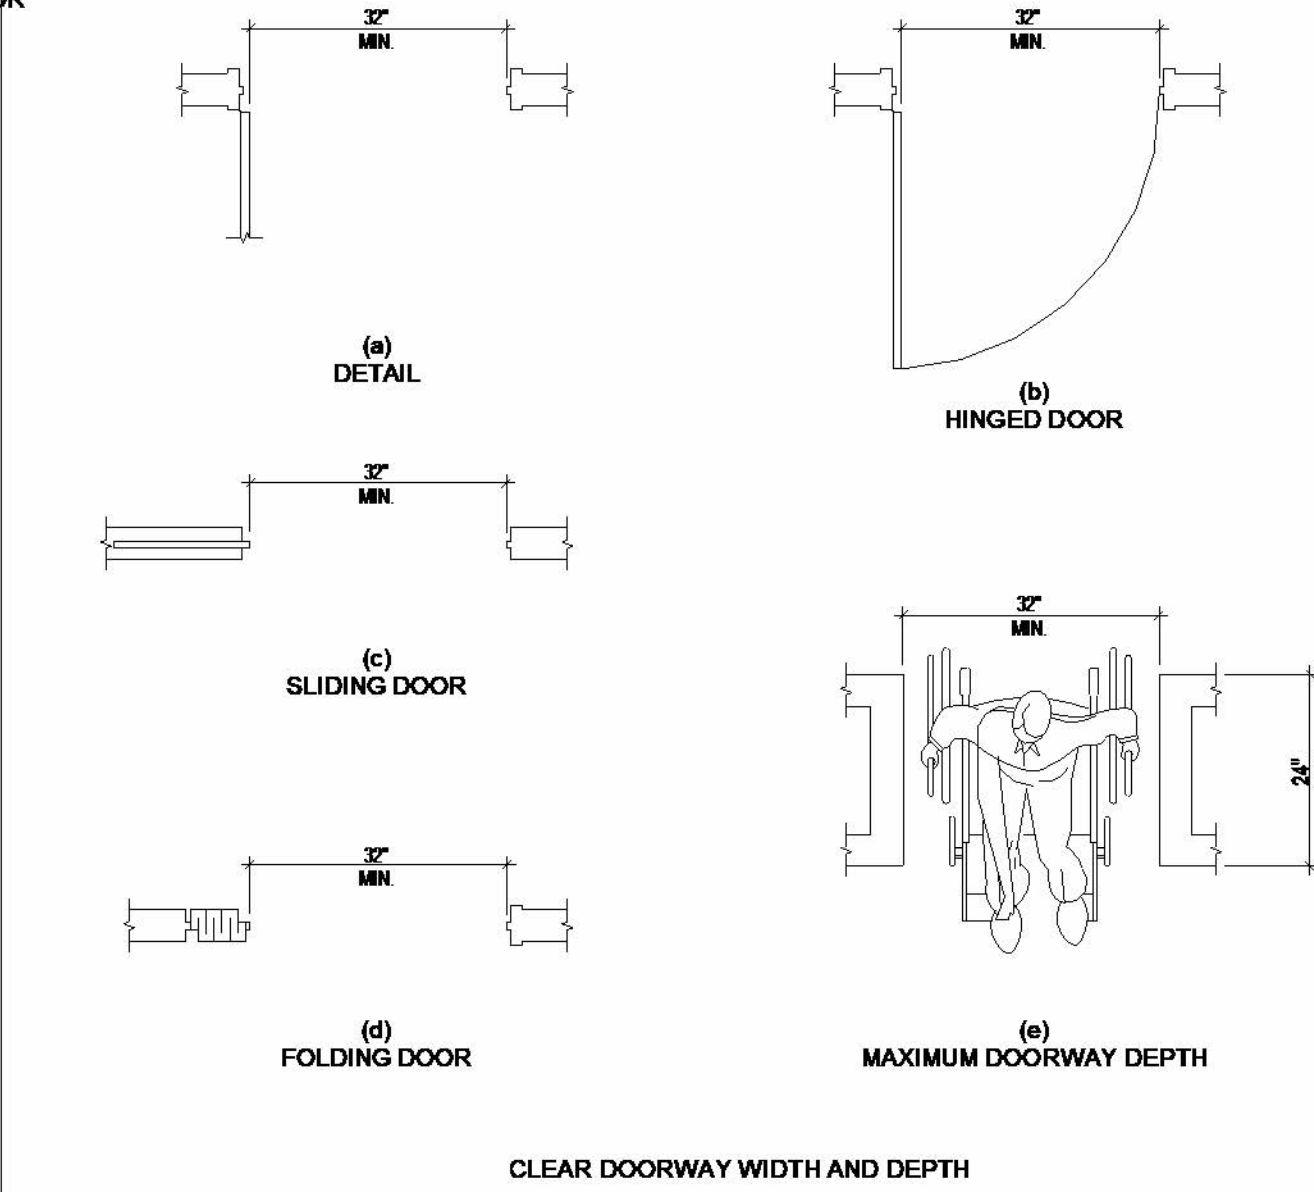


16 FLORIDA ACCESSIBILITY CODE
SCALE: N.T.S.

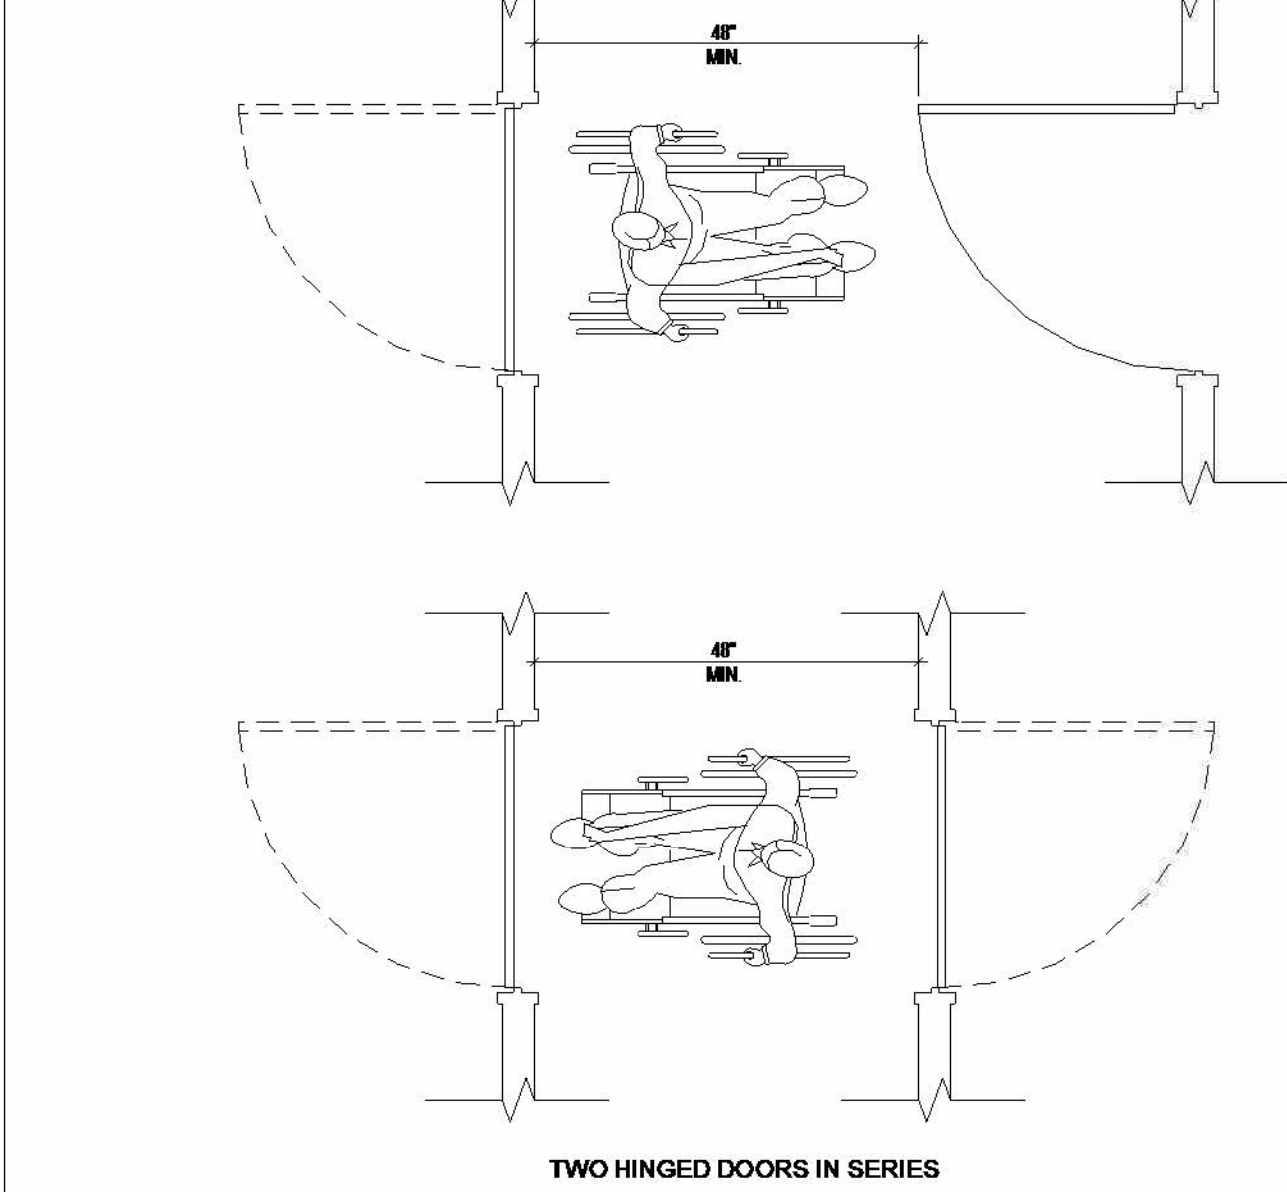

17 FLORIDA ACCESSIBILITY CODE
SCALE: N.T.S.

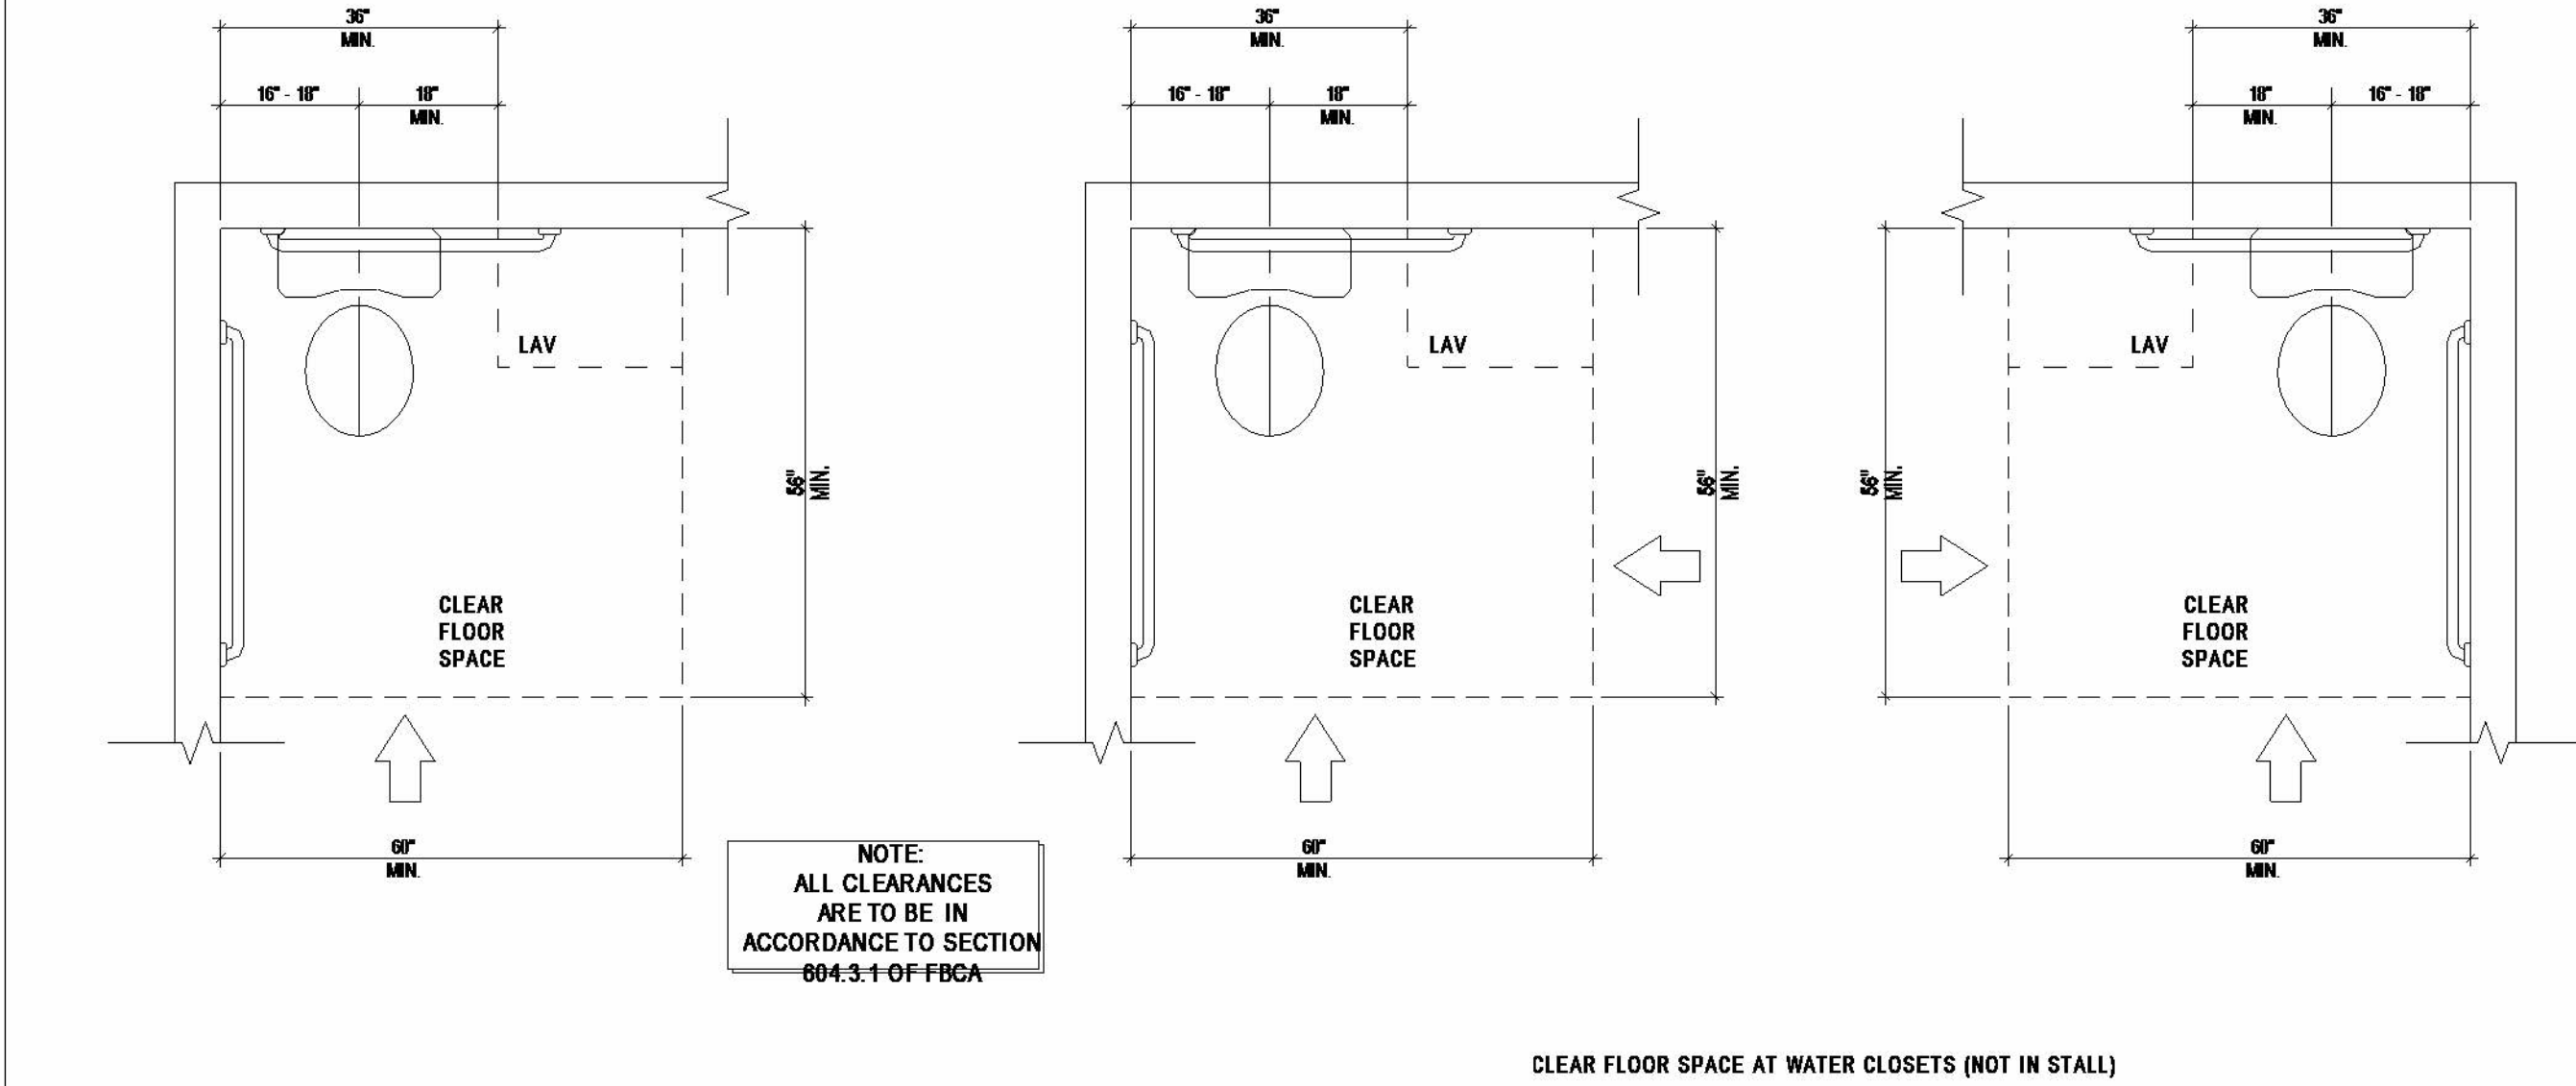

18 FLORIDA ACCESSIBILITY CODE
SCALE: N.T.S.

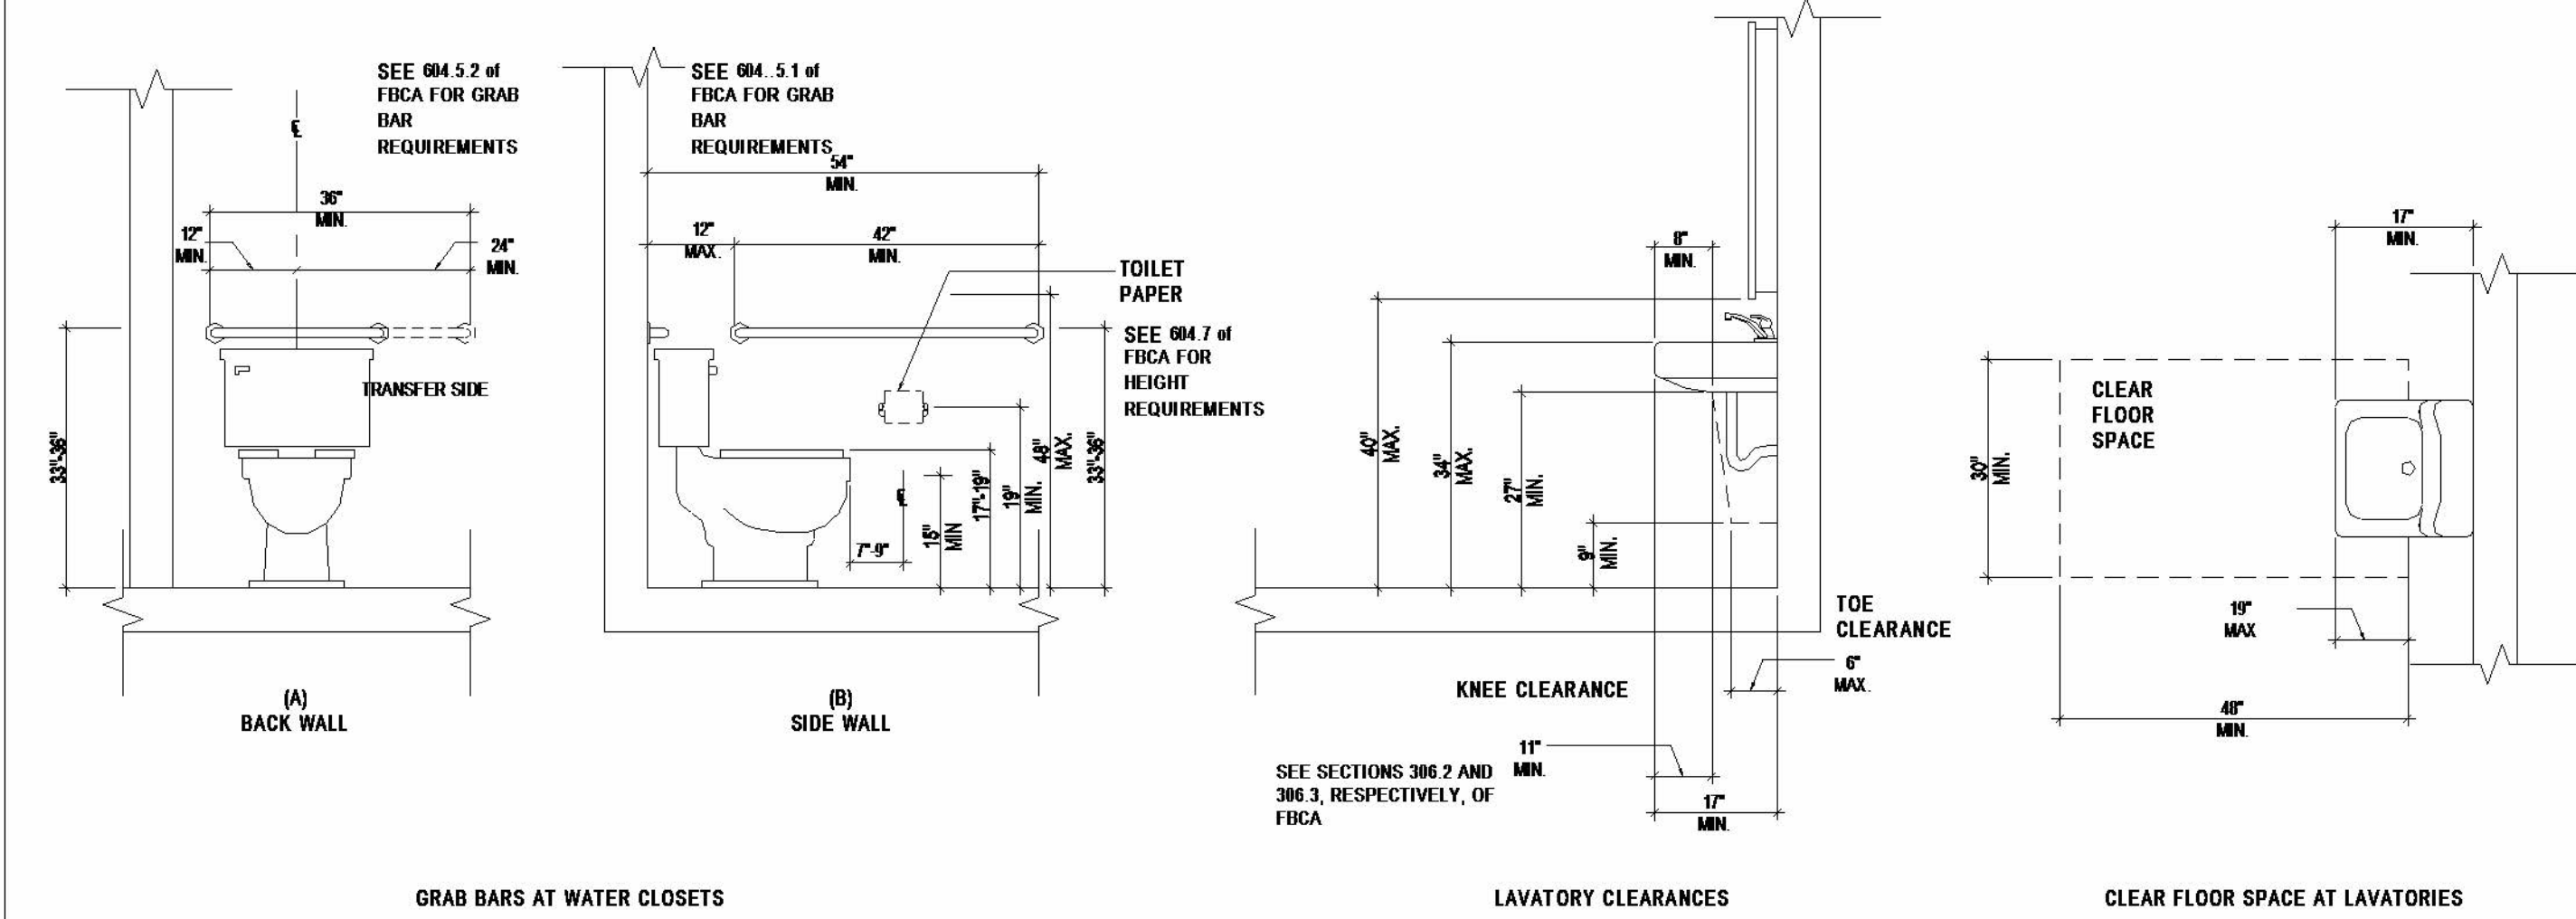

19 FLORIDA ACCESSIBILITY CODE
SCALE: N.T.S.

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

ADA SPEC
CONSTRUCTION
DETAILS

SHEET: 6 of 18


SHEET NUMBER

A-7

L ARCHITECTURE

Key Value	Keynote Text
-----------	--------------

Key Value	Keynote Text
-----------	--------------

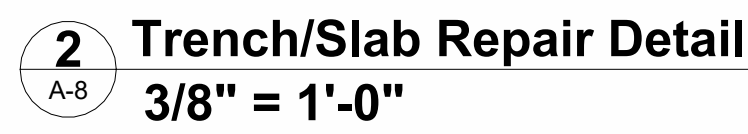

USED FOR: *** FOR PERMIT ***


TRANSACTIONS		
NO.	DESCRIPTION	DATE

PROPOSED FLOOR TRENCHING

SHEET NUMBER

ARCHITECTURE

4/12/2022 1:50:01 PM
K:\Projects\Projects\22-2076 - UDSI Metro Parkway #04 14Meters-High-Salon-CAD FILES\Sabin_MemoA.rvt

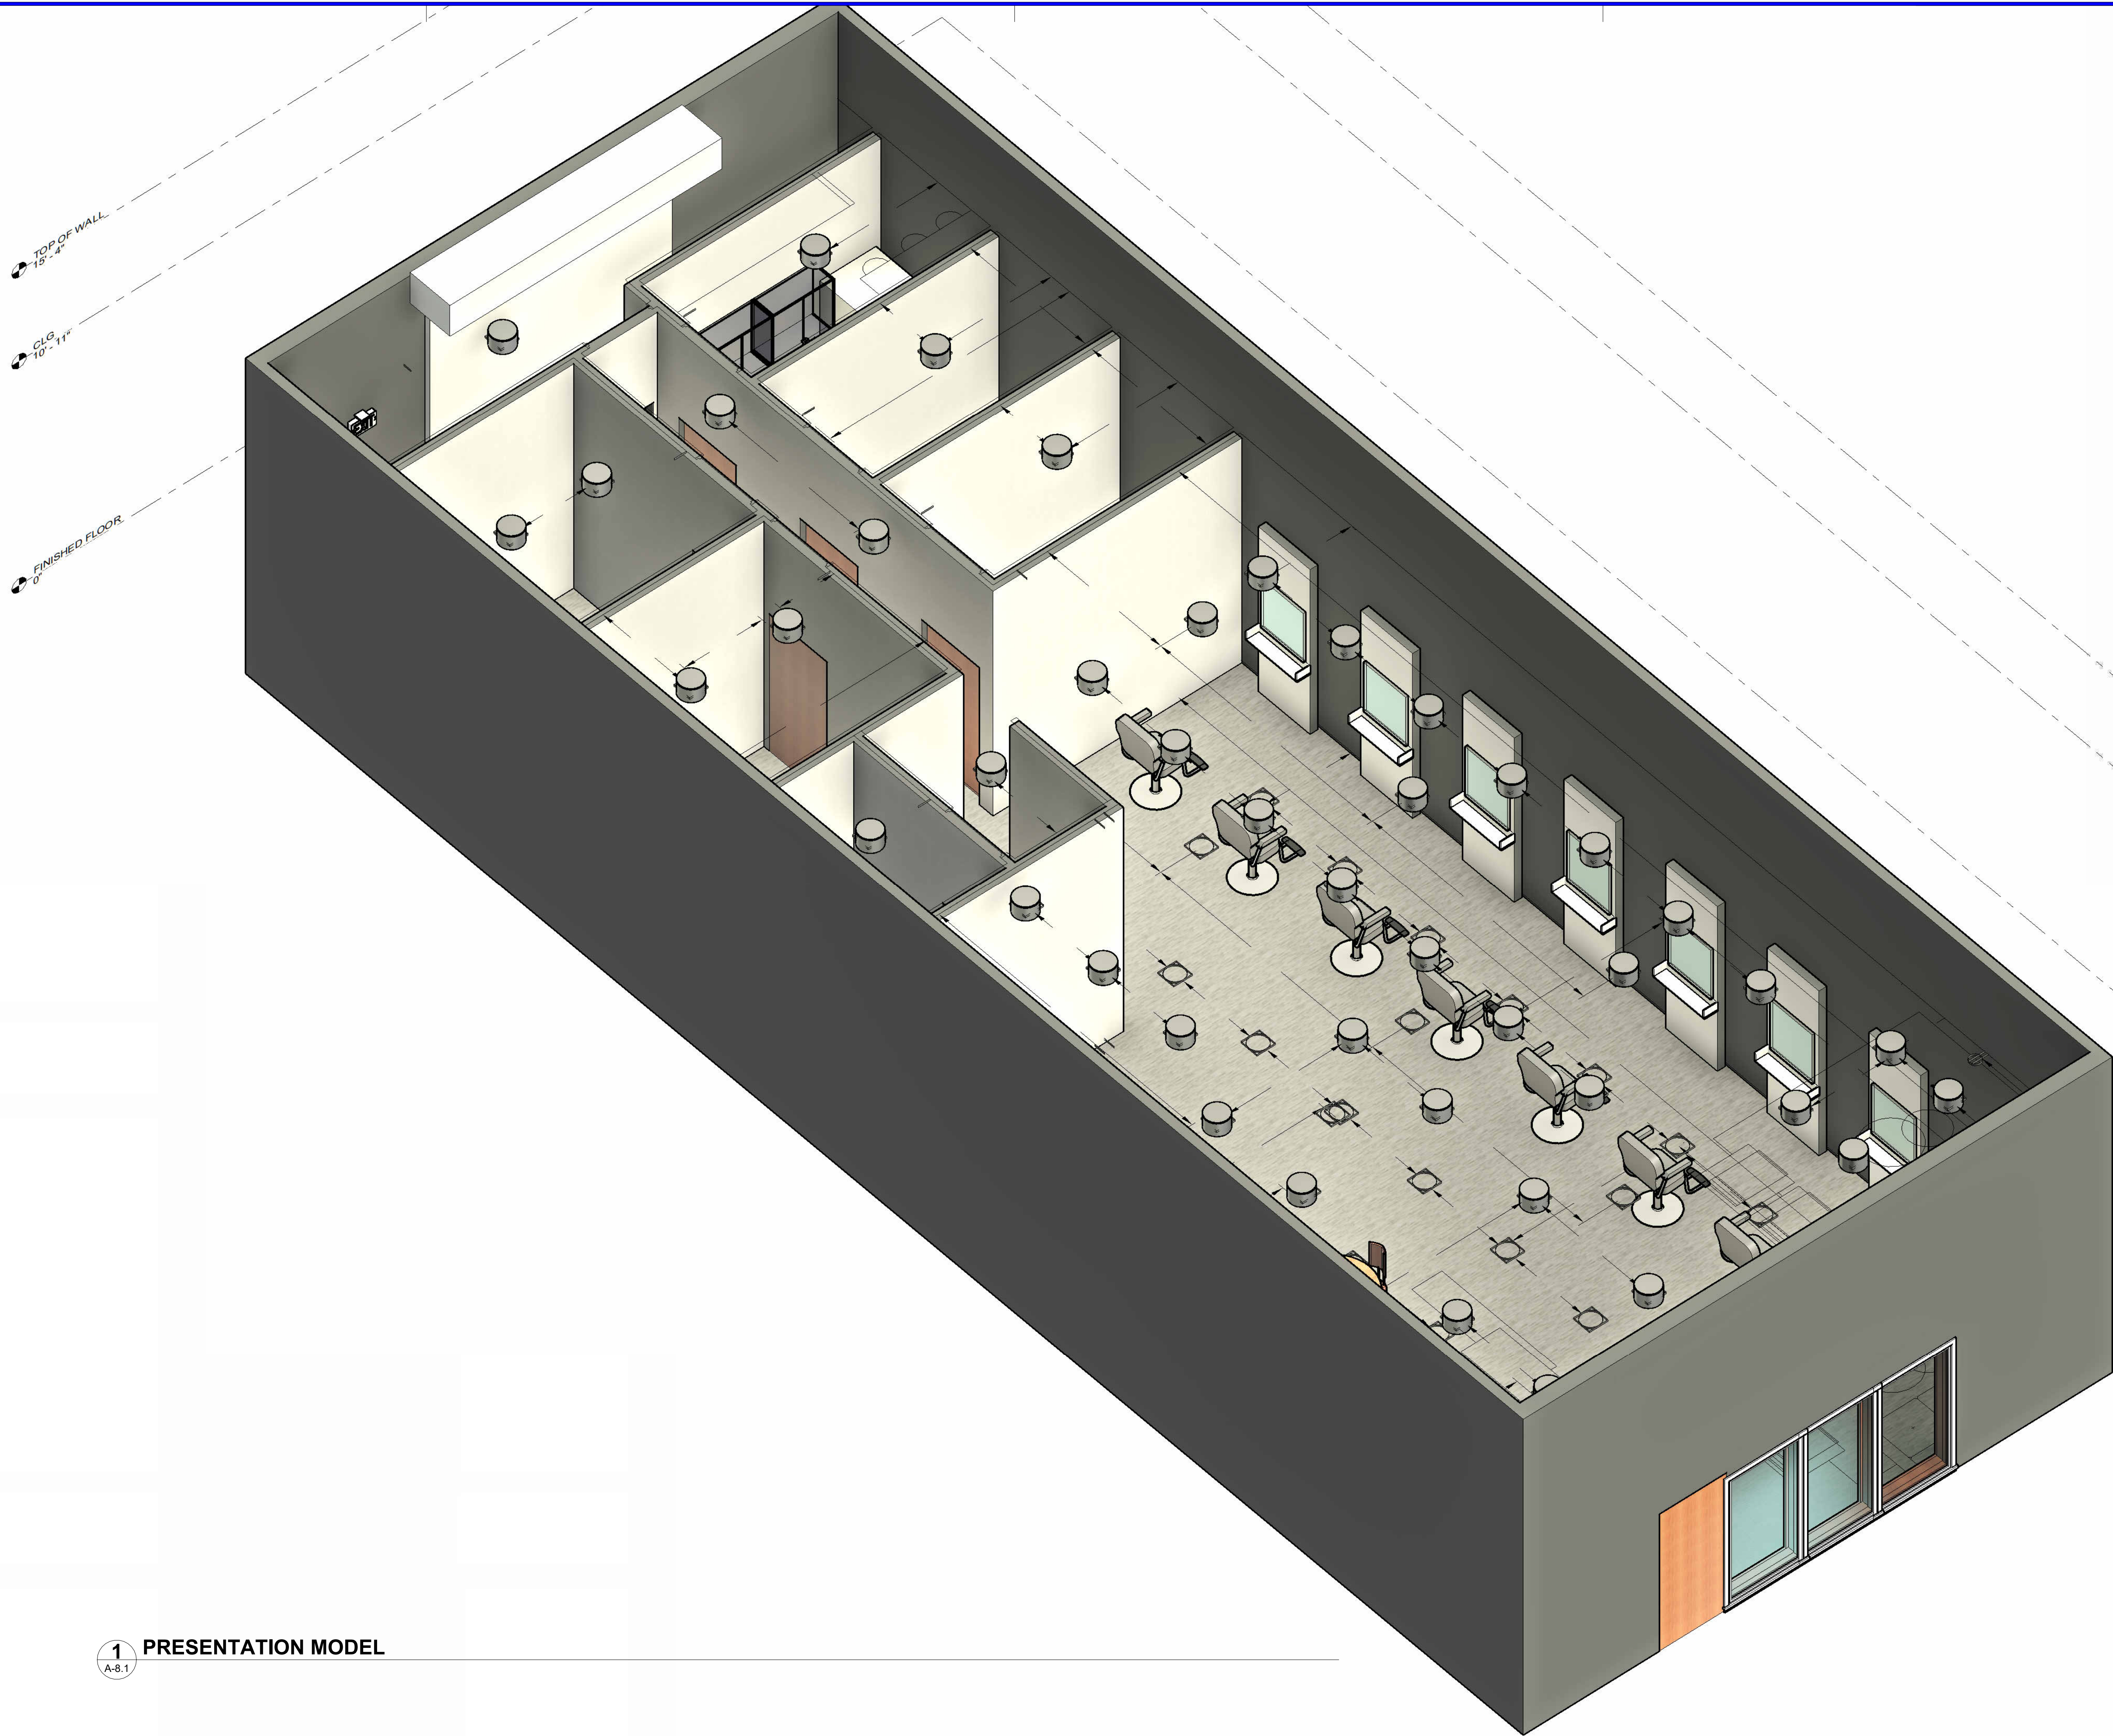

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

NO.	DESCRIPTION	DATE

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

PRESENTATION
MODEL

SHEET: 8 of 18

SHEET NUMBER

A-8.1

L ARCHITECTURE

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

ELECTRICAL SPECIFICATIONS

DIVISION 16000 - ELECTRICAL

16000 - GENERAL:

1. ALL ELECTRICAL WORK FOR THE ENTIRE PROJECT SHALL BE PERFORMED IN A NEAT AND CRAFTSMANLIKE MANNER BY PERSONS SKILLED IN THE TRADE, AND SHALL BE DONE UNDER THE SUPERVISION OF A MASTER ELECTRICIAN LICENSED TO DO WORK IN THE AREA WHERE THE PROJECT IS TO BE CONSTRUCTED. ALL WORK SHALL BE IN STRICT ACCORDANCE WITH THE LATEST COPY OF THE NATIONAL ELECTRIC CODE PRESENTLY ENFORCED AND AS ATTENDED TO BY NAPLES, FLORIDA.

16100 - SCOPE:

1. THE CONTRACTOR SHALL PROVIDE ALL LABOR, MATERIALS AND EQUIPMENT NECESSARY FOR A COMPLETE ELECTRICAL SYSTEM INCLUDING, BUT NOT LIMITED TO, POWER SERVICES (TEMPORARY, NORMAL, AND STAND-BY OR EMERGENCY), SWITCHBOARDS, AUTOMATIC TRANSFER SWITCHES, SERVICE ENTRANCE(S), DISCONNECTS, DISTRIBUTION PANELS, CONDUIT, WIRING, JUNCTION AND OUTLET BOXES, WIRING DEVICES AND COVER PLATES, LIGHTING FIXTURES, CONNECTION CHORDS, SPECIAL CONNECTIONS AND OUTLETS, ALL AS ILLUSTRATED ON THE CONTRACT DOCUMENTS AND IN FULL COMPLIANCE WITH ALL ADOPTED CODES. THE ELECTRICAL CONTRACTOR SHALL COORDINATE ALL WORK WITH OTHER TRADES, UTILITY COMPANIES, AND GOVERNING AUTHORITIES.

16110 - CODES:

1. ALL WORK PERFORMED SHALL BE IN ACCORDANCE WITH ANSI, NFPA70, STATE OF FLORIDA LAWS, AND ALL LOCAL RULES AND REGULATIONS, INCLUDING THE NATIONAL ELECTRIC CODE AND THE FLORIDA ENERGY CODE PRESENTLY IN EFFECT.

16120 - PERMITS:

1. THE CONTRACTOR SHALL OBTAIN ALL PERMITS AND PAY ALL FEES ASSOCIATED THEREWITH. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING INSPECTIONS, INCLUDING ALL FEES ASSOCIATED WITH REINSPECTIONS.

16130 - DRAWINGS:

1. THE DRAWINGS ARE DIAGRAMMATIC, AND DO NOT SHOW ALL CHANGES IN HEIGHT, STRUCTURAL MEMBERS, DUCTWORK, PIPING, BRACKETS AND ANY OTHER NUMBER OF ITEMS WHICH MIGHT CAUSE A CONFLICT. THIS CONTRACTOR SHALL COORDINATE WITH OTHER TRADES AS TO THE LOCATION OF HIS DEVICES AND NECESSARY AREAS FOR PANELS AND CONDUIT/WIRING RUNS. VERIFY AND COORDINATE ALL ELECTRICAL WORK WITH ALL TRADES TO PROVIDE A TIMELY INSTALLATION. ADDITIONAL CHARGES DUE TO LACK OF COORDINATION WILL NOT BE APPROVED.

16200 - MATERIAL:

1. ALL MATERIALS SHALL BE NEW, FREE FROM DEFECTS, AND SHALL BE LISTED BY AND BEAR THE U.L. LABEL WHERE SUBJECT TO APPROVAL. MATERIALS SHALL BE OF THE SAME MANUFACTURER OR BRAND FOR EACH TYPE OF MATERIAL, UNLESS DESIGNATED OTHERWISE.

16210 - FIXTURES:

1. ALL FIXTURES SHALL BE AS LISTED IN THE LIGHTING FIXTURE SCHEDULES/ RECOMMENDATIONS.

2. LIGHTING FIXTURES SHALL BE FURNISHED, INSTALLED, AND LAMPED UNDER THIS CONTRACT.

16220 - PANELS:

1. ALL PANELS SHALL BE FURNISHED AS PER PANEL SCHEDULE. SQUARE D, CUTLER HAMMER AND ITE ARE ACCEPTABLE MANUFACTURERS.

2. ALL SWITCHBOARD AND OVERCURRENT DEVICES SHALL BE SERIES-RATED TO WITHSTAND THE AVAILABLE FAULT CURRENT; VERIFY WITH LOCAL UTILITY COMPANY. SEE PANEL SCHEDULE.

16230 - DEVICES:

1. EXTERIOR DISCONNECT SWITCHES SHALL BE NEMA 3R ENCLOSURES AND BE ELECTRICALLY PROTECTED AS PER MANUFACTURER'S SPECIFICATIONS.

2. INTERIOR DISCONNECT SWITCHES SHALL BE NEMA 1 ENCLOSURES AND ELECTRICALLY PROTECTED AS PER MANUFACTURER'S SPECIFICATIONS.

3. SWITCHES SHALL BE 20 AMP, SPECIFICATION GRADE TOGGLE SWITCHES, SIDE WIRED WITH GROUNDING TERMINAL; COLOR SHALL BE WHITE (UNLESS NOTED OTHERWISE) WITH MATCHING COVERPLATE; MOUNTING HEIGHT SHALL BE +48" AFF.

4. RECEPTACLES SHALL BE 15 AMP (MINIMUM), SPECIFICATION GRADE, SIDE WIRED WITH GROUNDING TERMINAL; COLOR SHALL BE WHITE (UNLESS NOTED OTHERWISE) WITH MATCHING COVERPLATE; MOUNTING HEIGHT NOTED IN SYMBOL LEGEND OR ON DRAWING.

5. ALL RECEPTACLES INSTALLED IN KITCHENS, OR WITHIN 6 FEET (6') OF A WATER SUPPLY (i.e.: SINK), SHALL BE GROUND FAULT CIRCUIT INTERRUPTER (G.F.C.I.) DEVICES WITH DOWNSTREAM DEVICES IDENTIFIED.

6. ALL 120-VOLT, SINGLE PHASE, 15- AND 20-AMPERE BRANCH CIRCUITS SUPPLYING OUTLETS INSTALLED IN BATHROOMS SHALL HAVE GROUND-FAULT CIRCUIT-INTERRUPTER PROTECTION FOR PERSONNEL.

16240 - BRANCH CIRCUIT WIRING:

1. ALL CONDUCTORS SHALL BE COPPER UNLESS OTHERWISE SPECIFIED ON PLANS.

2. MINIMUM BRANCH CIRCUIT WIRING SHALL BE #12 AWG THWN COPPER.

EXCEPTION NO. 1: BRANCH CIRCUIT WIRING FOR DEDICATED LOADS, SUCH AS A PERMANENTLY INSTALLED APPLIANCE OR OTHER EQUIPMENT, SHALL BE SIZED ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS FOR THAT APPLIANCE OR EQUIPMENT, OR BY THE N.E.C. PRESENTLY IN EFFECT, WHICHEVER IS GREATER. REFER TO PANEL SCHEDULES.

16300 - INSTALLATION:

16310 - GENERAL:

1. ROUGH-IN SHALL BE COORDINATED WITH ARCHITECTURAL DRAWINGS AND FIELD CONDITION FOR EXACT LOCATIONS, AS WELL AS EQUIPMENT SIZE, TO AVOID CONFLICT WITH OTHER TRADES.

2. PRIOR TO ROUGH-IN, THE CONTRACTOR SHALL RELOCATE, AS DIRECTED BY THE OWNER/ARCHITECT, ANY PIECE OF EQUIPMENT IN THE VERTICAL AND/OR HORIZONTAL DIRECTION UP TO 15'-0" FROM THE LOCATION SHOWN ON THE DRAWINGS AT NO ADDITIONAL COSTS TO THE OWNER.

16320 - WIRING METHODS:

1. BELOW GRADE: SINGLE- OR MULTI-CONDUCTOR COPPER WIRE WITH GROUND, MEETING N.E.C. AND NEMA REQUIREMENTS, IN APPROVED NONMETALLIC CONDUIT, CONDUIT MAY BE RUN IN OR BELOW CONCRETE, AND CONCEALED IN WALLS TO FIRST BOXES. ALL PVC COMPONENTS (PIPING, FITTINGS, CEMENT, ETC.) SHALL BE FROM THE SAME MANUFACTURER.

2. EXTERIOR ABOVE GRADE: SINGLE- OR MULTI-CONDUCTOR COPPER WIRE WITH GROUND, MEETING N.E.C. AND NEMA REQUIREMENTS, IN APPROVED METALLIC OR NONMETALLIC CONDUIT, ALL COMPONENTS (PIPING, FITTINGS, ETC.) SHALL BE FROM THE SAME MANUFACTURER.

NOTE: MAXIMUM LENGTH OF FLEXIBLE CONDUIT SHALL BE SIX FEET (6').

3. EXTERIOR EQUIPMENT: SINGLE- OR MULTI-CONDUCTOR COPPER WIRE WITH GROUND, MEETING N.E.C. AND NEMA REQUIREMENTS, IN APPROVED LIQUID-TIGHT FLEXIBLE METALLIC OR NONMETALLIC CONDUIT (MINIMUM 3/4"). ALL COMPONENTS (PIPING, FITTINGS, ETC.) SHALL BE FROM THE SAME MANUFACTURER.

NOTE: MAXIMUM LENGTH OF FLEXIBLE CONDUIT BETWEEN MEANS OF DISCONNECT (OR JUNCTION BOX) AND EQUIPMENT SHALL BE THREE FEET (3').

4. INTERIOR: SINGLE- OR MULTI-CONDUCTOR COPPER WIRE WITH GROUND, MEETING N.E.C. AND NEMA REQUIREMENTS, IN APPROVED METALLIC OR NONMETALLIC CONDUIT (PIPING, FITTINGS, ETC.) SHALL BE FROM THE SAME MANUFACTURER. CONDUITS SHALL BE CONCEALED IN OR BEHIND CEILINGS, WALLS, OR FLOORS, EXCEPT WHERE EXPOSED RACEWAYS ARE SPECIFICALLY PERMITTED.

NOTE: EMT OR EQ SHALL NOT BE INSTALLED IN LOCATIONS (1) SUBJECT TO SEVERE DAMAGE, (2) IN CONTACT WITH EARTH, (3) IN CONCRETE SLABS ON GRADE, (4) OTHER LOCATIONS AS LISTED IN N.E.C 2011, ARTICLE 358.12.

5. ELECTRICAL SYSTEM EXPANSION: ANY PANELBOARD MOUNTED SO THAT ITS FRONT FACE IS FLUSH WITH THE FINISHED WALL SHALL HAVE ONE (1) 3/4" EMT OR EQ CONDUIT INSTALLED FROM PANELBOARD TO ACCESSIBLE CEILING SPACE FOR EVERY FOUR (4) OR MAJOR FRACTION THEREOF, POLES INDICATED AS "SPACE" OR "SPARE" IN THE PANELBOARD SCHEDULE PER THESE DOCUMENTS.

EXCEPTION NO. 1: PANELBOARDS INSTALLED ON A WALL SURFACE, WHERE AT LEAST THREE (3) SIDES, NOT INCLUDING THE FRONT, REMAIN ACCESSIBLE AFTER CERTIFICATE OF OCCUPANCY SHALL NOT BE REQUIRED TO MEET #16320.5.

5. ELECTRICAL BOXES: ALL OUTLET, DEVICE, AND JUNCTION BOXES SHALL BE STANDARD 4" SQUARE GALVANIZED STEEL OR APPROVED PLASTIC, 1-1/2" DEEP, WITH DEVICE RINGS OF THE SAME MATERIAL, UNLESS OTHERWISE NOTED. GALVANIZED BOXES SHALL BE MANUFACTURED BY APPLETON, NATIONAL, STEEL CITY, RACO OR APPROVED EQUAL. PLASTIC BOXES SHALL BE ALLIED, NELCO, CARLON, OR EQUAL. ALL ELECTRICAL BOXES SHALL BE ACCESSIBLE AFTER CERTIFICATE OF OCCUPANCY.

6. THRU-FEEDS: MAINTAIN THRU-FEEDS ON ALL ELECTRICAL DEVICES AT C.O.

16330 - EQUIPMENT:

1. WIRE TO, AND MAKE CONNECTIONS TO, ALL PIECES OF EQUIPMENT FURNISHED BY OTHERS FOR COMPLETE AND SATISFACTORY OPERATION BY OTHERS.

2. THIS CONTRACT SHALL INCLUDE CONNECTION OF LINE VOLTAGE ONLY. CONTROL WIRING SHALL BE BY THE HVAC CONTRACTOR.

16340 - GROUNDING:

1. THE ENTIRE ELECTRICAL GROUNDING SYSTEM SHALL BE IN STRICT ACCORDANCE WITH THE REQUIREMENTS OF SECTION 250.66 AND 250.122 OF THE NATIONAL ELECTRIC CODE, INCLUDING BUT NOT LIMITED TO, THE ELECTRICAL SERVICE, ITS EQUIPMENT AND ENCLOSURE, CONDUITS AND OTHER CONDUCTIVE ENCLOSURES, NEUTRAL OR IDENTIFIED CONDUCTOR OF INTERIOR WIRING SYSTEM, MAIN PANELBOARD, POWER AND LIGHTING PANELBOARDS, NON-CURRENT-CARRYING METAL PARTS OF FIXED EQUIPMENT SUCH AS MOTORS, STARTER AND CONTROLLER CABINETS, INSTRUMENT CASES AND LIGHTING FIXTURES.

2. PROVIDE A SERVICE GROUND ACCORDING TO N.E.C. ARTICLE 250. THE MINIMUM INSTALLATION SHALL INCLUDE: BUILDING FOOTER/FOUNDATION REINFORCING STEEL TURNED UP OR OTHERWISE EXPOSED AT THE SERVICE LOCATION WITH APPROVED CONNECTOR TO BOND A GROUNDING CONDUCTOR SIZED PER TABLE 250 TO THE STEEL AND A DRIVEN ROD GROUND (MINIMUM 5/8" BY 8" DEEP) WITH #6 COPPER GROUNDING CONDUCTOR, IF AVAILABLE AT THE PREMISES, ALSO BOND METAL COLD WATER PIPING, METAL BUILDING FRAME AND GROUND RING WITH JUMPERS SIZED FROM 250-94.

3. ALL TELEPHONE, DATA, TELEVISION, AND OTHER TERMINAL EQUIPMENT SHALL BE BONDED TO THE GROUNDING ELECTRODE WITH MINIMUM #6 AWG-CU.

16350 - WARRANTY: NOTE

1. ELECTRICAL CONTRACTOR SHALL PROVIDE FULL WARRANTY (PARTS AND LABOR) ON ALL EQUIPMENT AND MATERIALS FURNISHED UNDER THE SCOPE OF WORK FOR A PERIOD OF ONE YEAR FROM THE CERTIFICATE OF OCCUPANCY.

2. E.C. SHALL PROVIDE OWNER AND ENGINEER WITH REPRODUCIBLE "AS-BUILT" DRAWINGS SHOWING ALL REQUIRED MODIFICATIONS THAT HAVE OCCURRED IN THE FIELD

SUBMITTALS & SUBSTITUTIONS

UPON RECEIPT OF A CONTRACT, THE CONTRACTOR SHALL PROVIDE SIX (6) BOUND SUBMITTAL PACKAGES OF ALL EQUIPMENT, DEVICES, FIXTURES, ETC., TO THE ARCHITECT AND ENGINEER (FROM HERE ON, REFERRED TO AS "A/E") FOR REVIEW.

ALL SUBMITTALS AND/OR SUBSTITUTIONS SHALL BE DELIVERED TO THE A/E A MINIMUM OF FIFTEEN (15) BUSINESS DAYS AFTER CONTRACT. A/E SHALL REVIEW, COMMENT, AND RETURN THE SUBMITTAL AND/OR SUBSTITUTIONS REQUESTS TO THE CONTRACTOR A MINIMUM OF FIVE (5) DAYS THERE AFTER. ANY AND ALL APPROVALS WILL BE ONLY AT THE DISCRETION OF THE A/E. SUBMITTAL PACKAGES SHALL BE RETURNED TO THE CONTRACTOR WITH COMMENTS BY THE A/E, IF NECESSARY, FOR A RE-SUBMITTAL TO THE A/E.

PRIOR TO ORDERING ANY ITEMS SPECIFIED FOR THIS PROJECT, THE CONTRACTOR SHALL HAVE WRITTEN APPROVAL FROM THE A/E. SUBSTITUTIONS WILL NOT BE ACCEPTED WITHOUT WRITTEN APPROVAL BY A/E.

TYPICAL NOTES:

1. SWITCHED RECEPTACLES: SWITCH TOP HALF OF RECEPTACLE; BOTTOM SHALL REMAIN HOT!

2. EQUIPMENT FURNISHED AND PHYSICALLY INSTALLED BY "OTHERS". ALL ELECTRICAL CONNECTIONS EXTERNAL TO THE EQUIPMENT SHALL BE MADE BY THIS CONTRACTOR. WIRE, CONDUIT, LUGS, RECEPTACLES, PIGTAILS, DISCONNECTS, ETC. AS MAY BE REQUIRED SHALL BE FURNISHED BY THIS CONTRACTOR. NOTE: INCLUDE WORSE CONDITION IN PRICING. VERIFY ROUGH-IN LOCATIONS, TYPE OF CONNECTION AND AMPACITY REQUIRED FROM APPLICABLE ELECTRICAL DRAWINGS PRIOR TO INSTALLING ANY CONDUIT, CONDUCTORS OR BOXES.

3. PROVIDE WALL DIMMER WITH TUNGSTEN SURGE AND RFI PROTECTION. SLIDE ACTION WITH "OFF" POSITION AT BOTTOM.

4. WALL TELEPHONE/DATA OUTLET. INSTALL 2-GANG BOX WITH MODULAR TELEPHONE DEVICE IN COVER PLATE. INSTALL (2) 3/4" EMT OR EQ CONDUITS TO ACCESSIBLE CEILING SPACE OR HOMERUN TO TELEPHONE/COMPUTER TERMINAL EQUIPMENT. HEIGHT, UNLESS NOTED, IS 18" ABOVE FINISH FLOOR.

5. PROVIDE LIGHT FIXTURE AND RECEPTACLE AT LOCATIONS INDICATED FOR HVAC MAINTENANCE LIGHTING. USE COMBINATION SWITCH AND RECEPTACLE FOR LIGHT CONTROL. FIELD DETERMINES EXACT LOCATION AND HEIGHT.

GENERAL NOTES: ELECTRICAL

THE ELECTRICAL CONTRACTOR SHALL VERIFY AND COORDINATE ALL ELECTRICAL SERVICE ROUGH-IN AND INSTALLATION DETAILS, FEES, WITH THE LOCAL POWER COMPANY/UTILITY FIELD ENGINEER PRIOR TO AND INCLUDE IN BID!

THE ELECTRICAL INSTALLATION SHALL BE IN ACCORDANCE WITH ALL STATE/LOCAL BUILDING CODES/ORDINANCES/REGULATIONS PRESENTLY IN EFFECT. IN ADDITION, COMPLIANCE WITH THE NATIONAL ELECTRICAL CODE (N.E.C.) PRESENTLY IN EFFECT.

THE ELECTRICAL CONTRACTOR SHALL VISIT THE SITE IN ORDER TO FAMILIARIZE HIMSELF WITH EXISTING CONDITIONS, FAILURE TO DO SO WILL NOT WARRANT ANY ADDITIONAL CHARGES TO THE OWNER.

THE ELECTRICAL CONTRACTOR SHALL INCLUDE IN HIS BID, ANY CUTTING OR PATCHING OF CONCRETE/ASPHALT PAVEMENTS, ETC. TO RUN ELECTRICAL.

ALL EQUIPMENT, FIXTURES, ETC. SHALL BE STARTED, TESTED, ADJUSTED AND PLACED IN SATISFACTORY OPERATING CONDITION. THIS CONTRACTOR SHALL GUARANTEE ALL WORKMANSHIP, MATERIALS AND EQUIPMENT TO BE FREE OF DEFECTS FOR A PERIOD OF ONE (1) YEAR FROM DATE OF CERTIFICATE OF OCCUPANCY (C.O.), AND SHALL REPAIR ANY SUCH DEFECTS WITHOUT COST TO THE OWNER. ALL EQUIPMENT SHALL BE COVERED FOR THE DURATION OF THE MANUFACTURER'S GUARANTEE OR WARRANTY. THIS CONTRACTOR SHALL FURNISH THE OWNER WITH ALL MANUFACTURER'S GUARANTEE AND WARRANTIES.

"WAFER" OR "PIGGYBACK" BREAKERS SHALL NOT BE PERMITTED.

HVAC AIR HANDLER AND CONDENSING UNIT CIRCUIT BREAKERS SHALL BE U.L. LISTED AS "HACR" RATED. IN ORDER TO USE NON-AUTO DISCONNECTS AT HVAC EQUIPMENT. IF NOT LISTED, THEN A FUSED DISCONNECT IN ACCORDANCE WITH THE EQUIPMENT MANUFACTURER'S NAMEPLATE REQUIREMENTS SHALL BE INSTALLED AT THE EQUIPMENT.

THE ELECTRICAL, GENERAL, HVAC, AND PLUMBING CONTRACTOR(S) SHALL STRICTLY ADHERE TO THE FOLLOWING ITEMS WHEN DEALING WITH ELECTRICAL EQUIPMENT CLEARANCES:

A.) NO PIPING OR DUCTWORK OF ANY KIND SHALL BE INSTALLED ABOVE ANY SWITCHBOARD OR PANELBOARD. THIS AREA SHALL REMAIN CLEAN FROM THE EQUIPMENT TO 2'5" ABOVE OR TO THE BOTTOM OF THE STRUCTURAL SLAB.

B.) A CLEARANCE OF 36" MINIMUM SHALL BE MAINTAINED IN FRONT OF ELECTRICAL EQUIPMENT FOR THE ENTIRE WIDTH OF THE EQUIPMENT, PLUS A MINIMUM OF 30" TOTAL LEFT/RIGHT CLEARANCE.

ALL "WEATHERPROOF" ("WP") DEVICES SHALL BE PROVIDED AND INSTALLED WITH A WEATHER-SHIELDING COVER.

ALL ELECTRICAL CONDUITS NOT CONTAINING SPECIFIED CONDUCTORS SHALL HAVE A PULL WIRE INSTALLED.

DO NOT SCALE THE ELECTRICAL DRAWINGS; REFER TO THE ARCHITECTURAL PLANS AND FIELD CONDITIONS FOR EQUIPMENT LOCATIONS, CABINETRY, CEILING GRIDS, DOOR SWINGS, ETC.

THE INTENT OF THESE DRAWINGS IS TO PROVIDE A COMPLETE AND FULLY OPERATIONAL ELECTRICAL INSTALLATION.

IT IS NOT THE INTENT OF THESE PLANS TO SHOW ALL DETAILS OF CONSTRUCTION. THE ELECTRICAL CONTRACTOR SHALL PROVIDE ALL ITEMS SUCH AS HARDWARE, J-BOXES, CONDUIT FITTINGS, ETC., AS NECESSARY FOR A COMPLETE ELECTRICAL SYSTEM INSTALLATION.

TECHNICIANS SKILLED IN THEIR TRADE SHALL PERFORM ALL ELECTRICAL INSTALLATIONS IN A PROFESSIONAL MANNER.

WIRE TO, AND MAKE CONNECTIONS AS NECESSARY, TO ALL PIECES OF EQUIPMENT (FURNISHED BY OTHERS), FOR COMPLETE AND OPTIMAL OPERATION BY THE OWNER.

PROVIDE CIRCUIT BREAKERS, AS NECESSARY, TO ACCOMMODATE ALL NEW CIRCUITS INSTALLED.

ALL SERVICE AND FEEDER CONDUITS SHALL HAVE EXPANSION FITTINGS WHEN PENETRATING SLABS, TO ALLOW FOR STRUCTURAL SETTLEMENT.

PROVIDE "PVC" CONDUITS STUBBED OUT WITH PULL WIRE, BELOW GRADE, IN ORDER TO PROVIDE CONCEALED TELEPHONE AND/OR DATA SERVICE ENTRANCE.

PROVIDE TIME CLOCKS WITH BATTERY BACK-UP TO CONTROL ALL SIGNAGE AND EXTERIOR LIGHTING CIRCUITS; SEE POWER RISER DIAGRAM FOR ADDITIONAL DETAILS.

ALL CONDUCTORS SHALL BE TYPE THHN/THWN, COPPER (CU) UNLESS OTHERWISE CALLED FOR ON THESE DOCUMENTS. SEE PANEL SCHEDULE.

NOTICE TO CONTRACTOR: REVISIONS TO THESE DRAWINGS AND CERTIFICATION THEREOF WHICH MAY BE REQUIRED BECAUSE OF CONTRACTOR OPTED REVISIONS, SHALL BE COMPENSATED TO THE ENGINEER(S) BY THE REQUESTING CONTRACTOR. PAYMENT SHALL BE REQUIRED AT THE TIME OF CERTIFICATION DELIVERY.

GENERAL NOTES:

CONTRACTOR SHALL REVIEW ALL CUT SHEETS FOR EQUIPMENT INSTALLED IN THIS PROJECT TO VERIFY ALL LOADING, OVER-CURRENT PROTECTION/MAX FUSE SIZE FOR ALL EQUIPMENT. THIS INCLUDES BUT IS NOT LIMITED TO ALL PUMPS, HVAC EQUIPMENT, LIGHTING, APPLIANCES ETC. THIS SHALL BE DONE PRIOR TO FINAL EQUIPMENT CONNECTION.

CONTRACTOR SHALL VERIFY VOLTAGE SUPPLIED TO STRUCTURE TO BE THE SAME VOLTAGE AS STATED ON THE RISER DIAGRAM, PANEL SCHEDULES, OR ANY OTHER PLACE ON THESE DRAWINGS. CONTRACTOR SHALL VERIFY VOLTAGE BETWEEN ALL PHASES IS EQUAL TO ENSURE THE STRUCTURE IS NOT SUPPLIED WITH A OPEN DELTA SERVICE. THIS SHALL BE DONE PRIOR TO ANY ELECTRICAL CONNECTION OF ANY ELECTRICAL DEVICES.

CONTRACTORS NOTES:

LIMITED ENGINEERING FIELD INVESTIGATION WAS PERFORMED TO ILLUSTRATE TO THE CONTRACTOR SOME FIELD CONDITIONS. PRIOR TO BID, THE CONTRACTOR SHALL PERFORM COMPREHENSIVE FIELD INVESTIGATION TO DETERMINE FIELD CONDITIONS NECESSARY TO EXECUTE THE WORK UNDER THIS CONTRACT. BASED ON THE RESULTS OF THE CONTRACTORS FIELD INVESTIGATION, ELECTRICAL LAYOUTS AS SHOWN ON THESE DRAWINGS MAY NEED SOME MODIFICATIONS TO BE COORDINATED WITH THE ACTUAL FIELD CONDITIONS FOUND BY THE CONTRACTOR.

EQUIPMENT ELECTRICAL ROUGH-INS HAVE BEEN COORDINATED AND ARE LISTED IN PANEL SCHEDULES. THE CONTRACTOR SHALL VERIFY THE ELECTRICAL REQUIREMENTS OF EACH PIECE OF EQUIPMENT PRIOR TO ROUGH-IN, WHICH MAY RESULT IN REVISING CERTAIN EQUIPMENT CIRCUITS. THE A/E SHALL BE ADVISED OF ANY AND ALL REVISIONS REQUIRED TO THESE CONSTRUCTION DOCUMENTS.

WORK UNDER THIS PROJECT SHALL COMPLY WITH THE NEC 2014 (NFPA-70)

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

THE FOLLOWING WIRE SIZES SHALL BE USED:

- 15A CIRCUIT BREAKER FURNISH #12 AWG & #12 AWG GROUND WIRE SIZE
- 20A CIRCUIT BREAKER FURNISH #12 AWG & #12 AWG GROUND WIRE SIZE
- 25A CIRCUIT BREAKER FURNISH #10 AWG & #10 AWG GROUND WIRE SIZE
- 30A CIRCUIT BREAKER FURNISH #10 AWG & #10 AWG GROUND WIRE SIZE
- 40A CIRCUIT BREAKER FURNISH #8 AWG & #10 AWG GROUND WIRE SIZE
- 50A CIRCUIT BREAKER FURNISH #8 AWG & #10 AWG GROUND WIRE SIZE
- 60A CIRCUIT BREAKER FURNISH #6 AWG & #10 AWG GROUND WIRE SIZE
- 80A CIRCUIT BREAKER FURNISH #4 AWG & #8 AWG GROUND WIRE SIZE

Branch Panel: PNL-1

Location: CORRIDOR 14	Volts: 120/240 Single	A.I.C. Rating:
Supply From:	Phases: 1	Mains Type:
Mounting:	Wires: 3	Mains Rating: 200 A
Enclosure: DO NOT USE		MCB Rating:

ALL INTERIOR LIGHTS TO BE RUN THROUGH NEW TIME CLOCK FOR AUTO SHUTDOWN, PER ENERGY CODE

Notes:




CKT	Circuit Description	Wire Size	Trip	Poles	A	B	Poles	Trip	Wire Size	Circuit Description	CKT
1	Lighting STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	225 VA	100 VA		1	20 A	12"C, #12, #12N, #12G	2
3	Lighting Room 19, 18	12"C, #12, #12N, #12G	20 A	1		125 VA	225 VA	1	20 A	12"C, #12, #12N, #12G	4
5	Lighting STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	125 VA	100 VA		1	20 A	12"C, #12, #12N, #12G	6
7	Lighting Room 19, 16, 17, 15	12"C, #12, #12N, #12G	20 A	1		125 VA	25 VA	1	20 A	12"C, #12, #12N, #12G	8
9	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	180 VA	360 VA		1	20 A	12"C, #12, #12N, #12G	10
11	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1		540 VA	1200 VA	1	20 A	12"C, #12, #12N, #12G	12
13	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	1200 VA	1200 VA		1	20 A	12"C, #12, #12N, #12G	14
15	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1		1200 VA	1200 VA	1	20 A	12"C, #12, #12N, #12G	16
17	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	1200 VA	1200 VA		1	20 A	12"C, #12, #12N, #12G	18
19	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1		1200 VA	1200 VA	1	20 A	12"C, #12, #12N, #12G	20
21	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1	1200 VA	540 VA		1	20 A	12"C, #12, #12N, #12G	22
23	Receptacle Room 4 12	12"C, #12, #12N, #12G	20 A	1		540 VA	720 VA	1	20 A	12"C, #12, #12N, #12G	24
25	Receptacle Room 2 17	12"C, #12, #12N, #12G	20 A	1	540 VA	540 VA		1	20 A	12"C, #12, #12N, #12G	26
27	Receptacle STYLING AREA 19	12"C, #12, #12N, #12G	20 A	1		540 VA	180 VA	1	20 A	12"C, #12, #12N, #12G	28
29	Receptacle BREAK RM 16	12"C, 2#12, #12N, #12G	20 A	2	350 VA	1200 VA		1	20 A	12"C, #12, #12N, #12G	30
31	--	--	--	--		350 VA	1200 VA	1	20 A		32
33	Receptacle STYLING AREA 19		20 A	1	1200 VA	180 VA		1	20 A		34
35	Other STYLING AREA 19		20 A	1		0 VA	0 VA	1	20 A		36
37											38
39											40
41											42
Total Load:					11614 VA	10546 VA					
Total Amps:					97 A	88 A					

Legend:

Load Classification	Connected Load	Demand Factor	Estimated Demand	Panel Totals
Other	0 VA	0.00%	0 VA	
Receptacle	21160 VA	73.63%	15580 VA	Total Conn. Load: 22160 VA
Lighting	1050 VA	100.00%	1050 VA	Total Est. Demand: 16581 VA
				Total Conn.: 92 A
				Total Est. Demand: 69 A


PROVIDE HACR TYPE BREAKERS FOR HVAC LOADS
VERIFY MCB RATING FOR ALL EQUIPMENT LOADS
LABEL BRANCHES FEEDING EMERGENCY LIGHTS...

LIGHTING CONTROL NOTE:

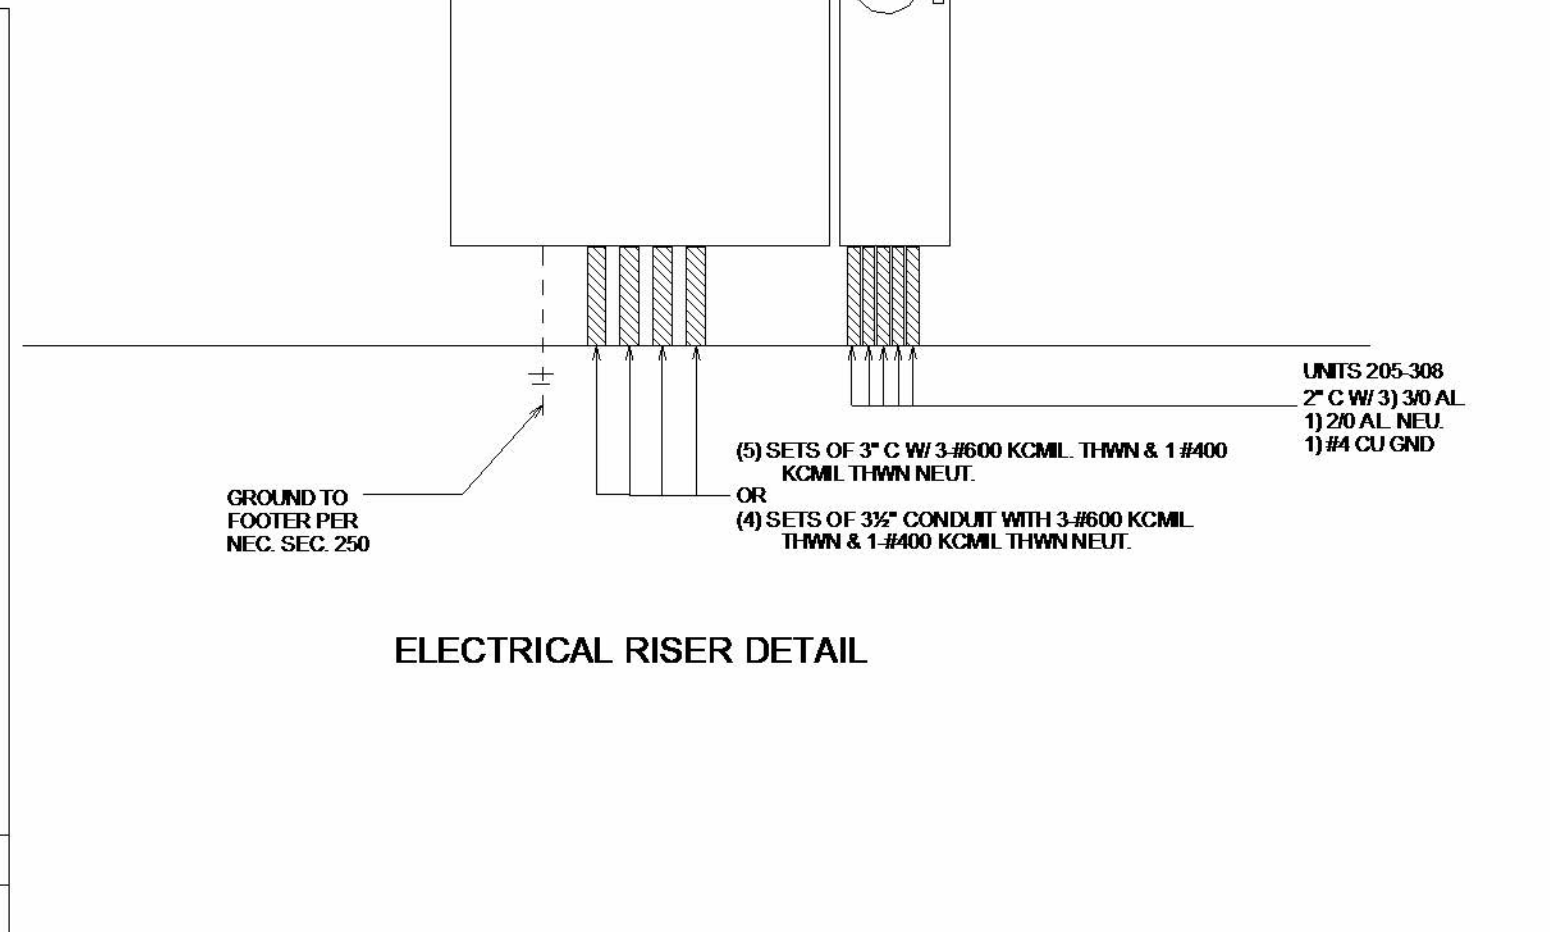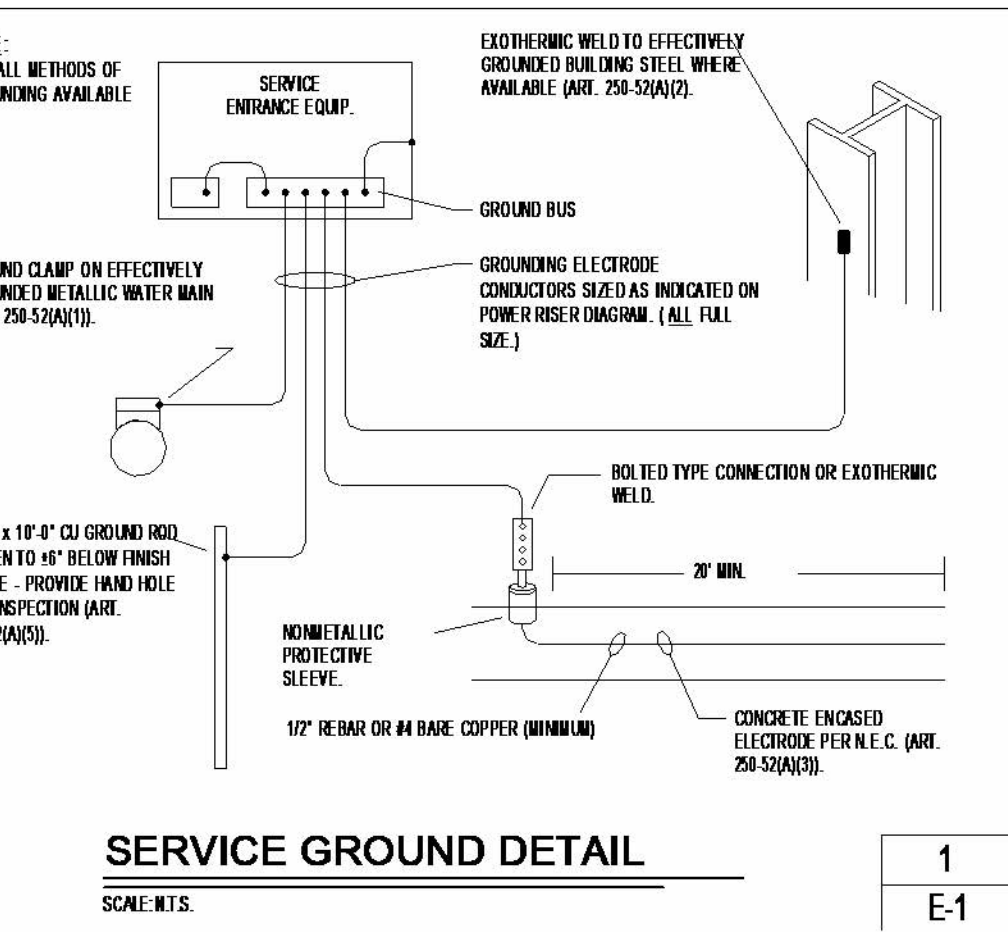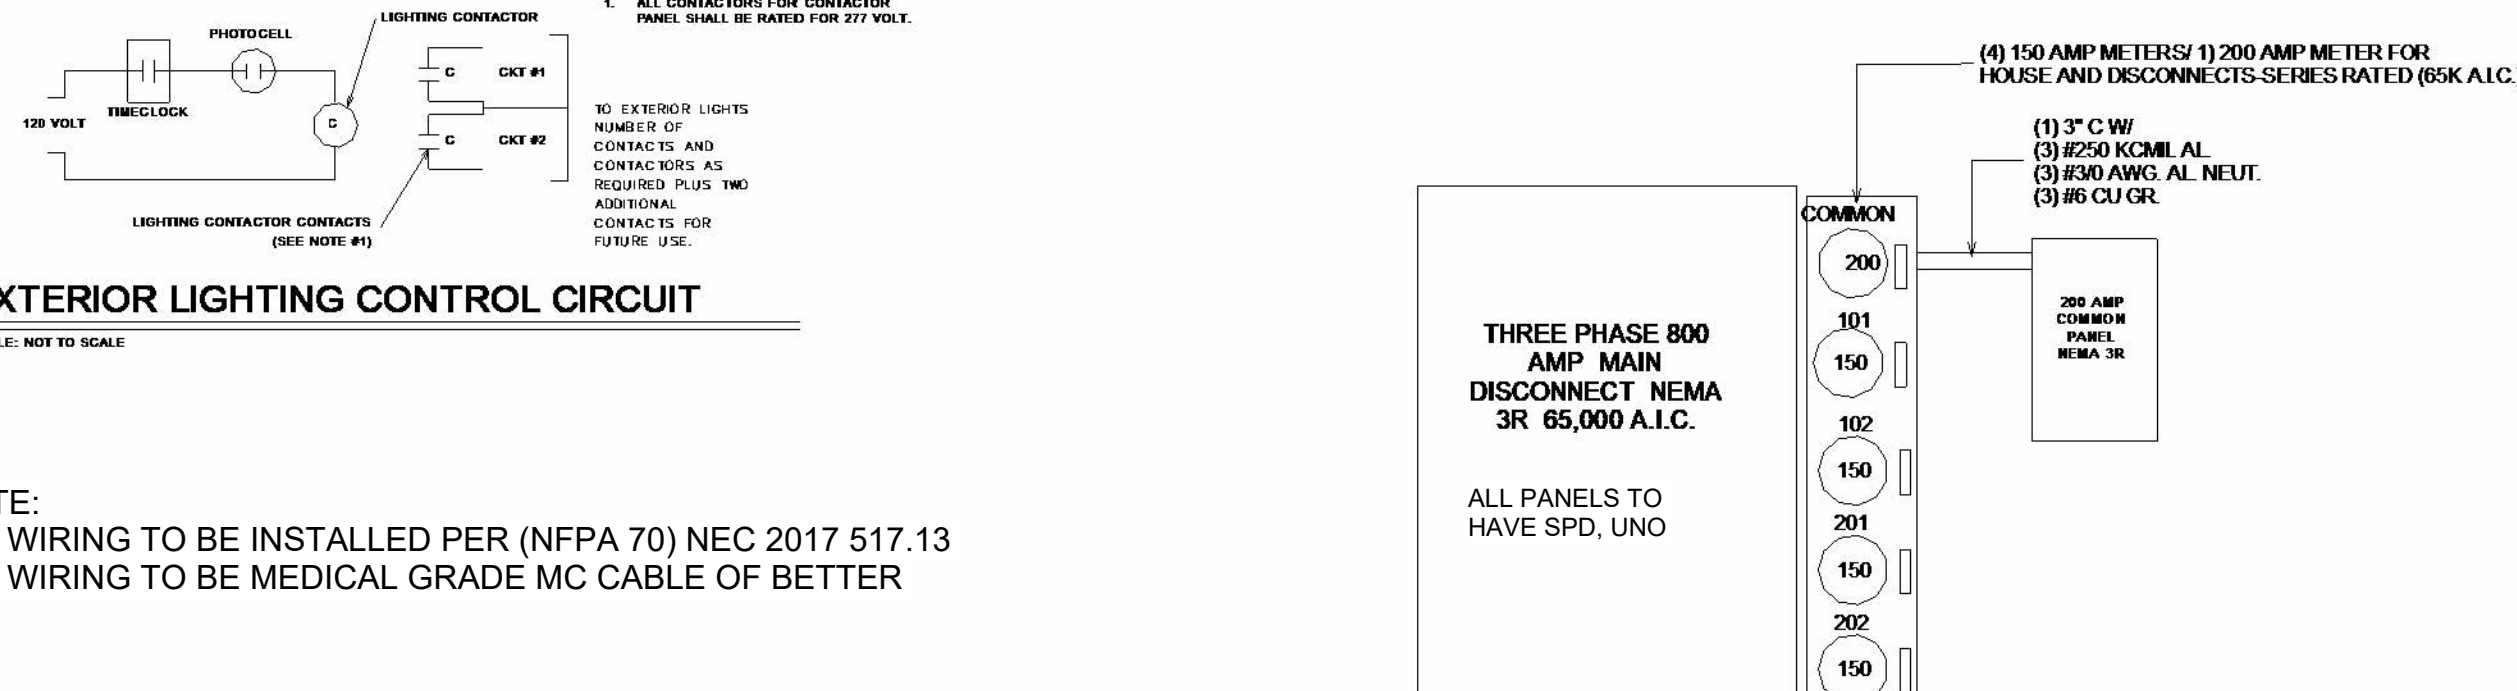


Key Value	Keynote Text
-----------	--------------

ELECTRICAL LEGEND		
SYMBOL	DESCRIPTION	NOTES
	SWITCH, SINGLE POLE	1W/1W/1
	SWITCH, THREE WAY	1W/1W/1
	RECESSED SWITCH	1W/1W/1
	RECESSED CEILING/ANGLED SWITCH	1W/1W/1
	RECESSED SWITCH (CEILING) - HEAVY DUTY	1W/1W/1
	CEILING SWITCH (RECESSED) SWITCH	CEILING
	MOMENTARY CONTACT SWITCH	1W/1W/1
	LEAVING CONNECTION	1W/1W/1
	TIME CLOCK	1W/1W/1
	PHOTO CELL	---
	120 VOLT SERVICE LIGHT FIXTURE	SEE SCHEDULE
	120 VOLT SERVICE LIGHT FIXTURE	SEE SCHEDULE
	120 VOLT SERVICE LIGHT FIXTURE	SEE SCHEDULE
	STRIP LIGHT FIXTURE	SEE SCHEDULE
	RECESSED LIGHT FIXTURE	SEE SCHEDULE
	RECESS LIGHT FIXTURE	SEE SCHEDULE
	RECESS LIGHT FIXTURE	SEE SCHEDULE
	EXIT SIGN	SEE SCHEDULE
	EMERGENCY BATTERY UNIT	SEE SCHEDULE
	SIMPLE RECEPTACLE	1W/1W/1
	RECEPTACLE	1W/1W/1
	RECEPTACLE (RECESSED) 1/2 AMPERE CIRCUIT RATED	1W/1W/1
	SWITCHED RECEPTACLE	1W/1W/1
	RECEPTACLE	1W/1W/1
	RECEPTACLE (RECESSED) 1/2 AMPERE CIRCUIT RATED	1W/1W/1
	RECEPTACLE	1W/1W/1
	SPECIAL PURPOSE OUTLET	1W/1W/1
	FLOOR OUTLET	FLOOR
	FLOOR OUTLET (CONV. UNIT) & FLOOR/CEILING/OUTLET	FLOOR
	FLOOR OUTLET (CONV. UNIT) & FLOOR/CEILING/OUTLET	FLOOR
	CEILING OUTLET (RECEPTACLE)	CEILING
	TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	FLOOR
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1
	RECESSED TELEPHONE OUTLET	1W/1W/1

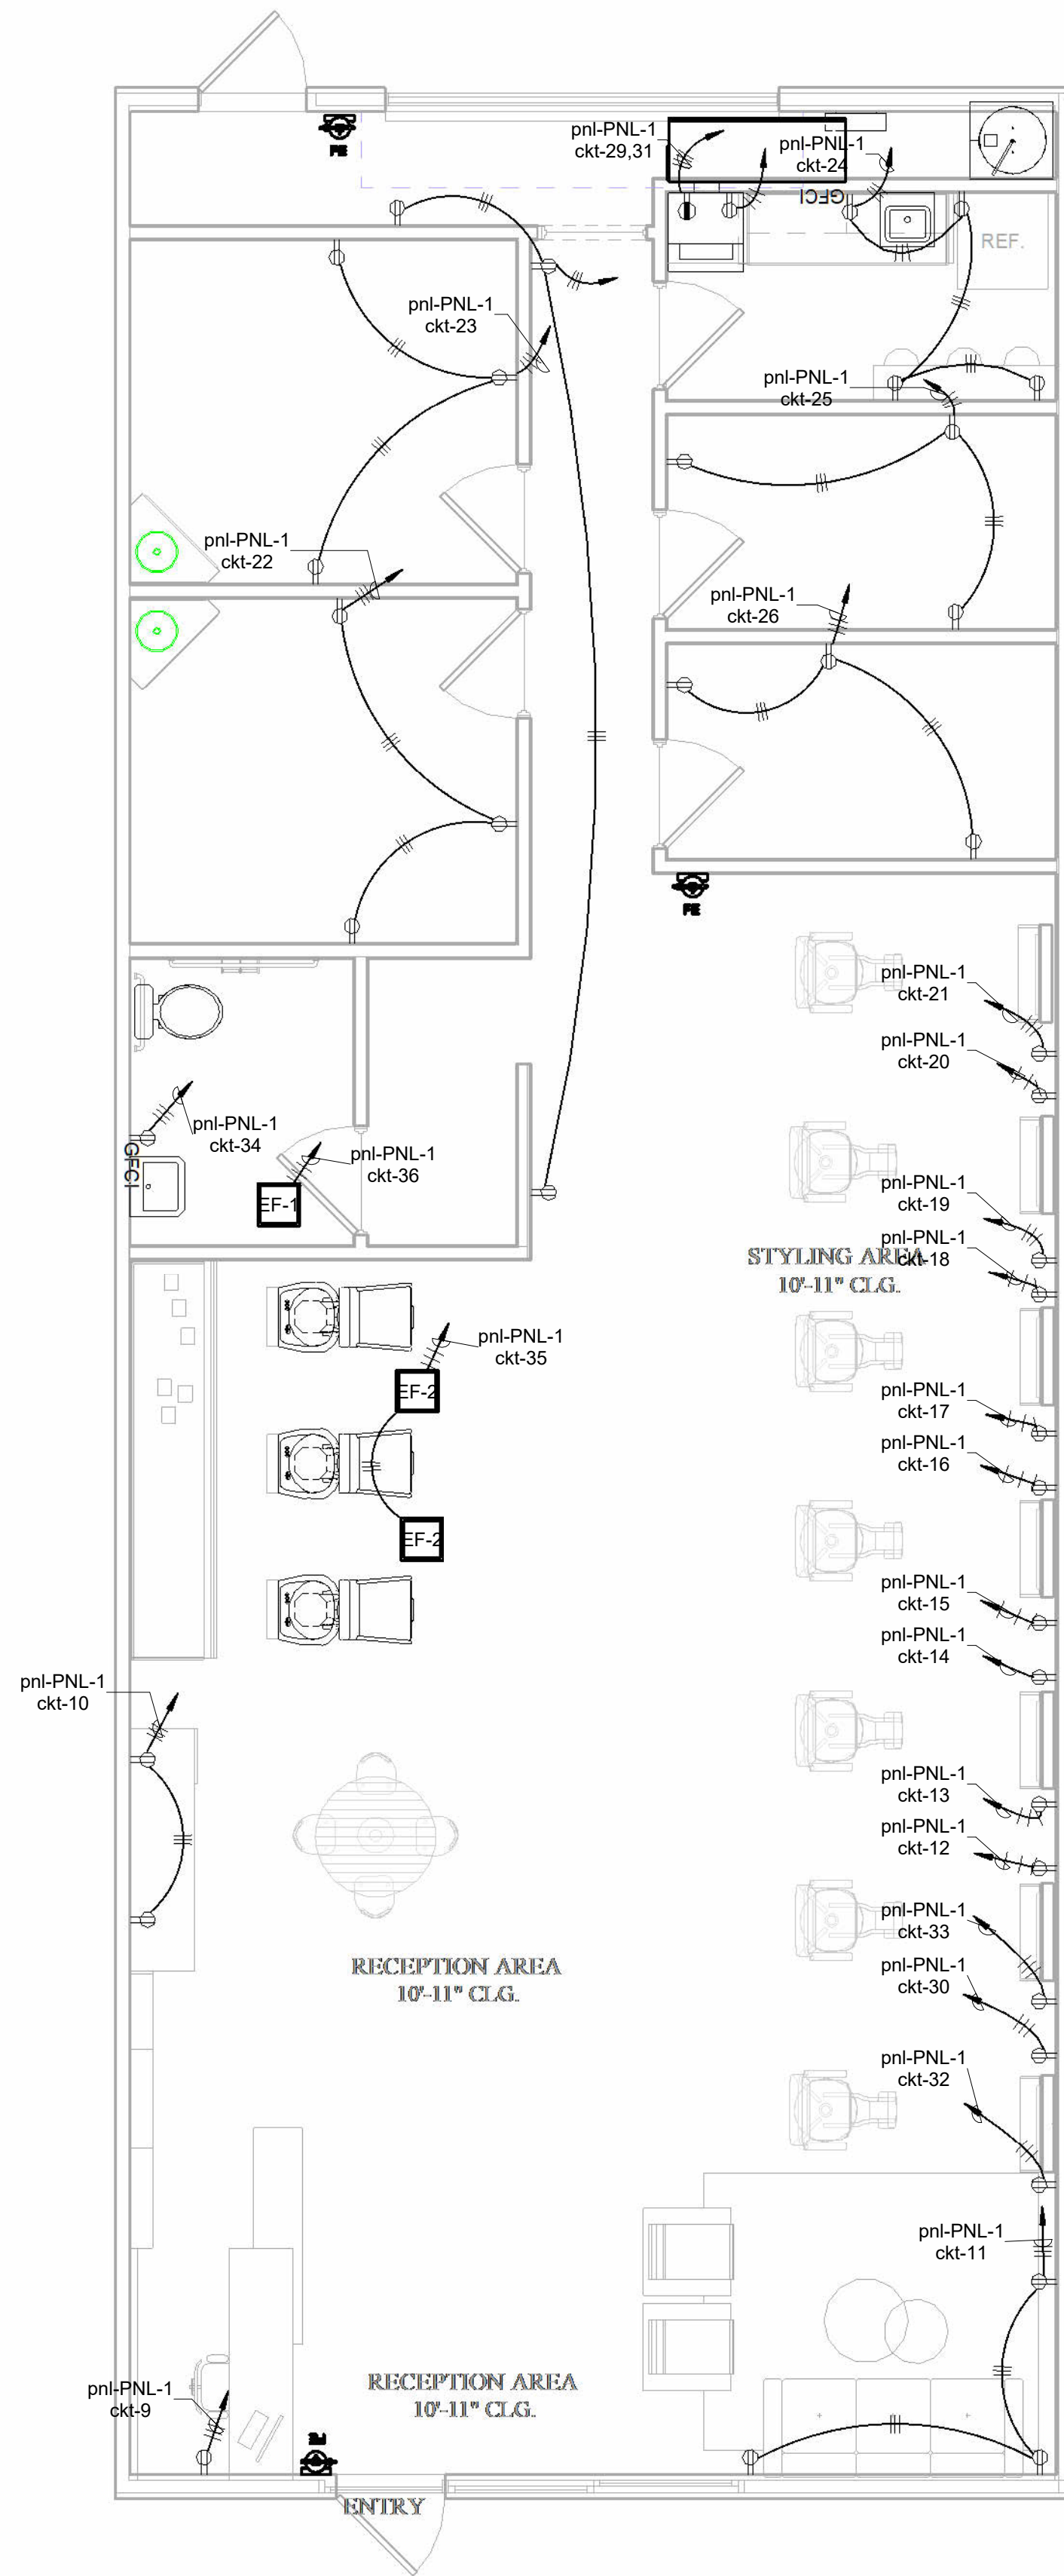

1 POWER FLOOR PLAN
E-1
1/4" = 1'-0"

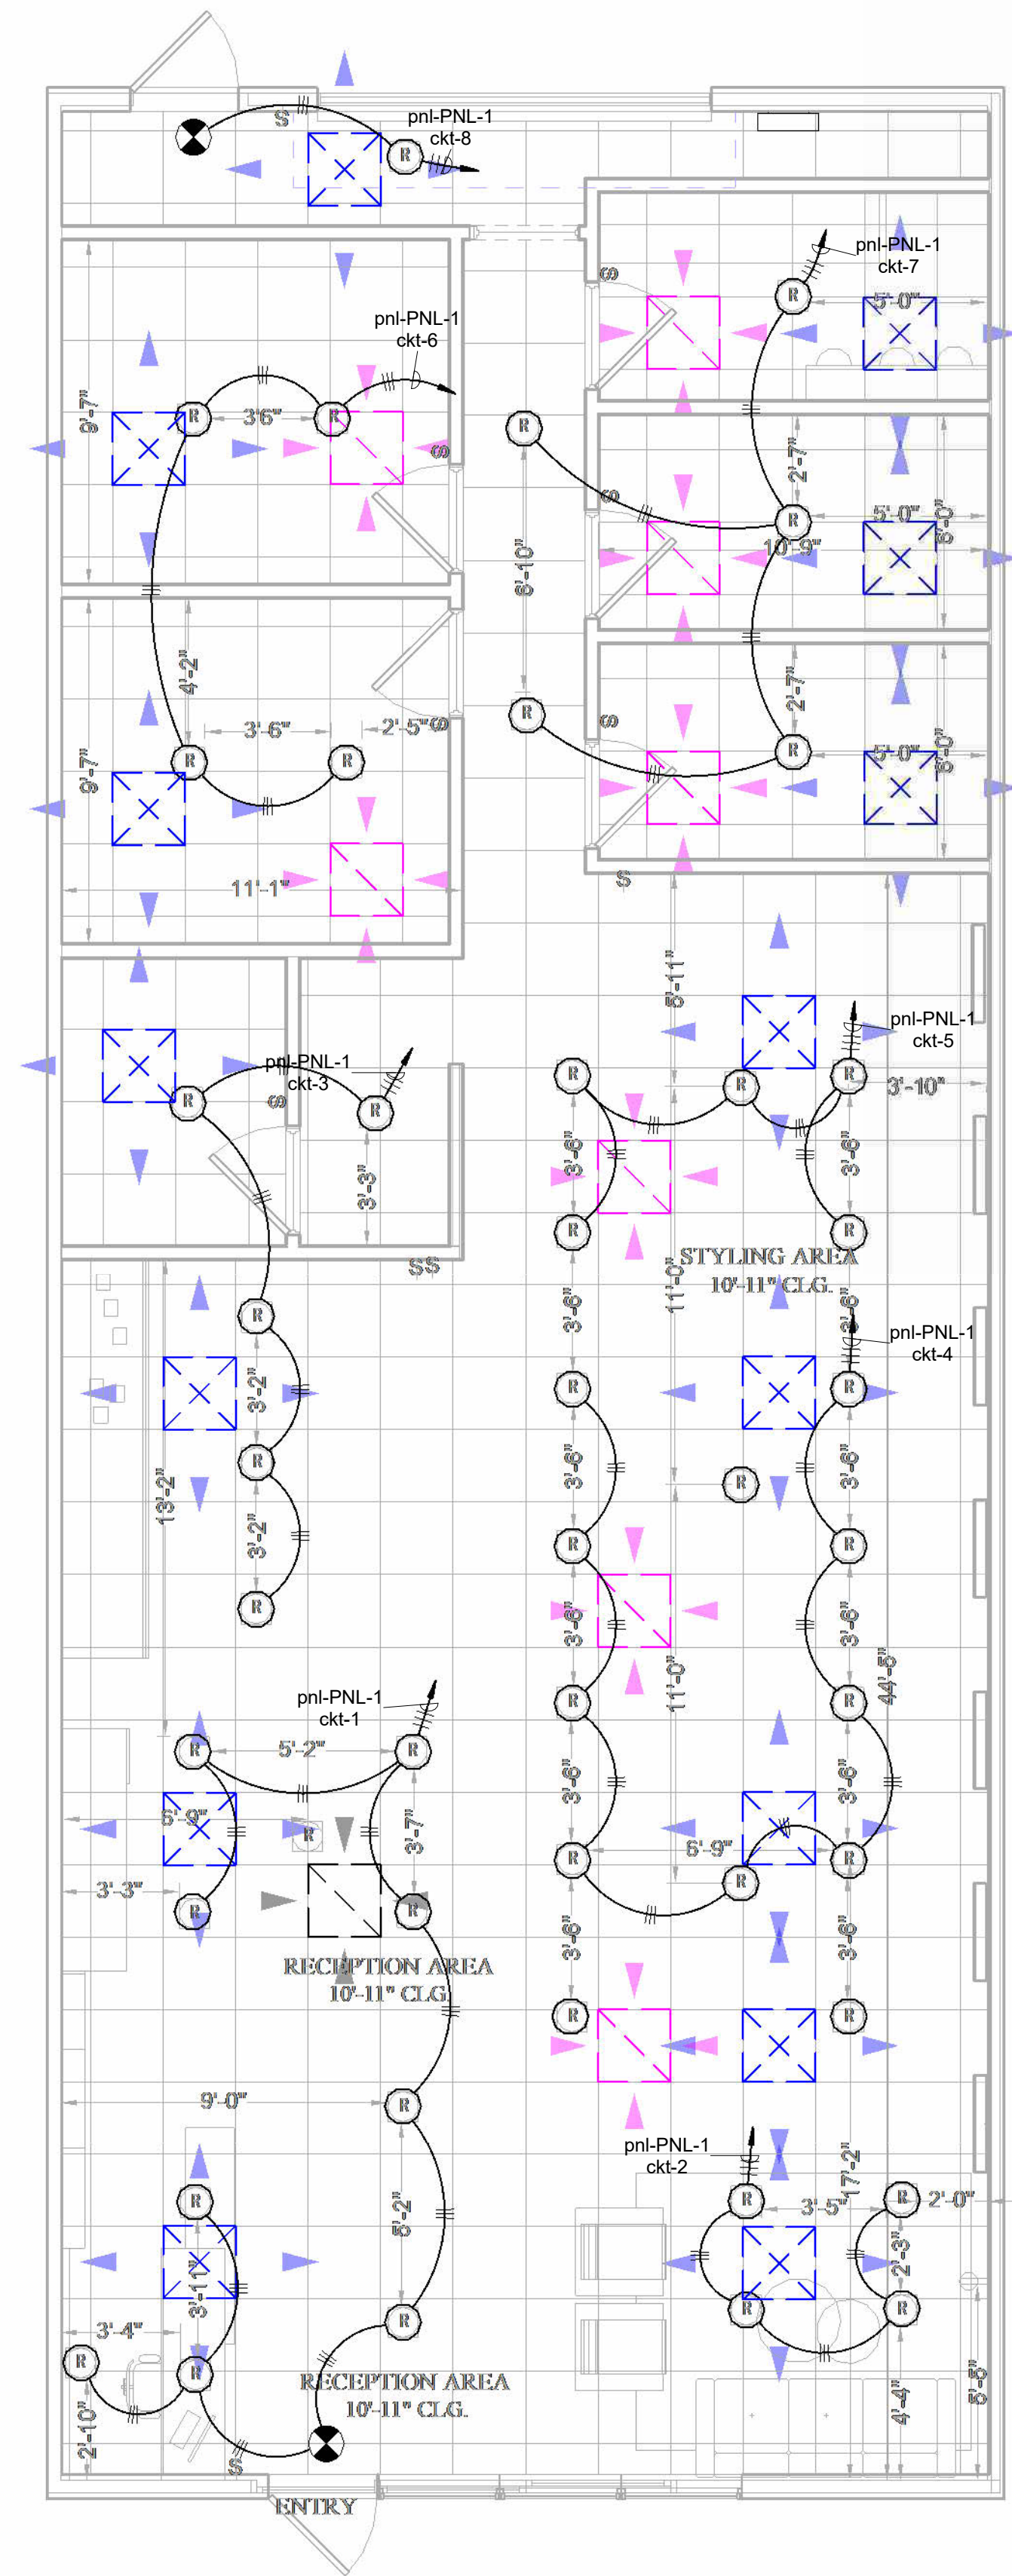

2 LIGHTING PLAN
E-1
1/4" = 1'-0"

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
MX	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

PROPOSED ELECTRICAL PLAN

SHEET: 2 of 18


SHEET NUMBER

E-1

2. ELECTRICAL

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXISTS BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.


4/17/2022 2:50:05 PM

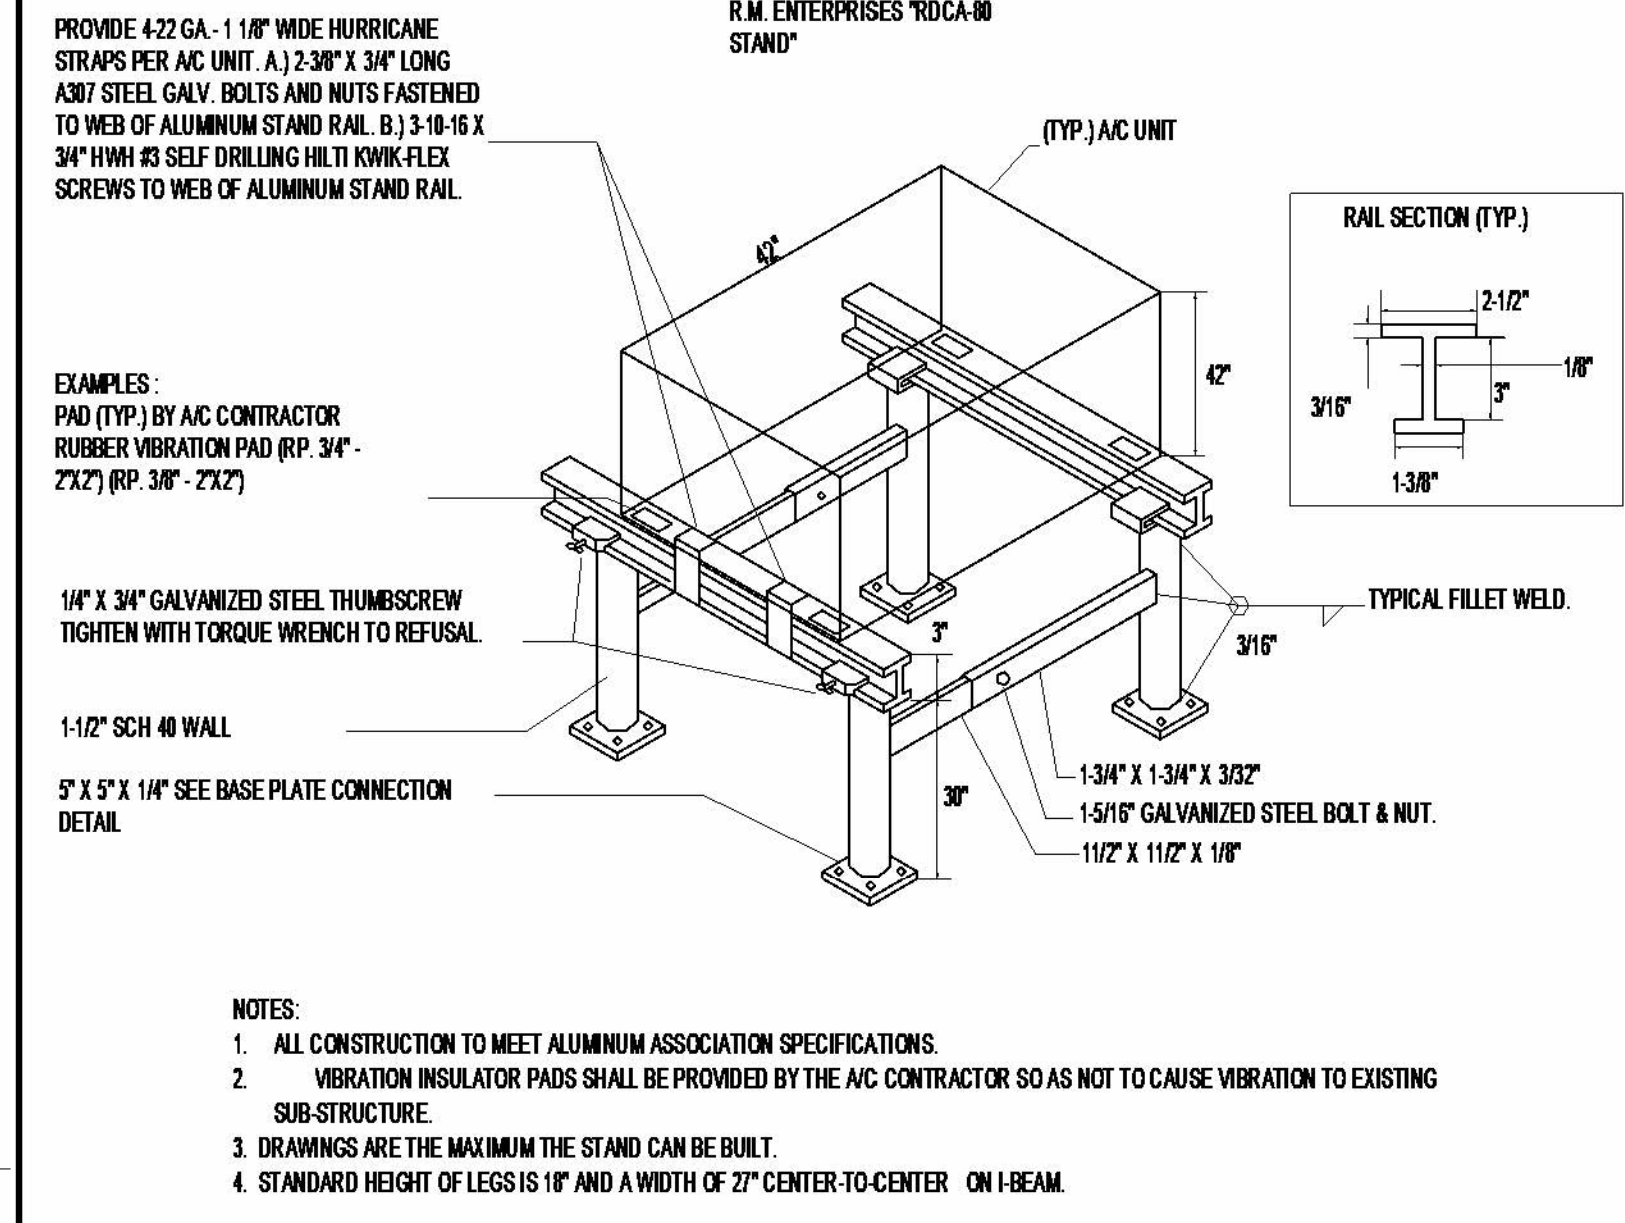


AC UNIT ROOF STAND

NOT TO SCALE


SYMBOLS & ABBREVIATIONS



SUPPLY AIR GRILLE




RETURN AIR GRILLE




EXHAUST AIR GRILLE



RIGID RECTANGULAR AIR DUCT




RIGID ROUND AIR DUCT




FLEX DUCT



LOUVER



TURNING VANES



FIRE DAMPER



EXHAUST FAN




MARK, TYPE | DIRECTION
CFM


12x14 WIDTH X HEIGHT

12" WIDTH

14" HEIGHT



DUCT SMOKE DETECTOR



DUCT TEMP DETECTOR



DUCT STATIC PRESSURE SENSOR



TEMPERATURE SENSOR



THERMOSTAT



CO2 SENSOR



FIRE DAMPER



AIR HANDLER UNIT



CONDENSING UNIT



ROOF TOP UNIT



EXHAUST FAN



ENERGY RECOVERY VENTILATOR



MAKE-UP AIR UNIT



RETURN



BOTTOM OF BEAM



CHILLED WATER SUPPLY



CHILLED WATER RETURN



DUCT HEATER



VARIABLE AIR VOLUME



CONDENSATE



OUTSIDE AIR

AIR DEVICE SCHEDULE

DESIGNATION	DESCRIPTION	MANUFACTURER MODEL NUMBER	AIR QUANTITY CFM	NECK SIZE	THROW DIRECTION	ACCESSORIES	REMARKS
CDX	CEILING SUPPLY DIFFUSER LOUVERED 24x24 FACE, T-BAR LAY-IN INSTALLATION ALUMINUM CONSTRUCTION	TITUS TDC-AA	0-100 101-200 201-250 251-400	6"x6"/6" Ø 9"x9"/9" Ø 12"x12"/10" Ø 12"x12"/12" Ø	SEE PLANS SEE PLANS SEE PLANS SEE PLANS	ØBD	SEE NOTE 1
CR1	CEILING RETURN GRILLE/REGISTER EGGCRATE 24x24 FACE, T-BAR LAY-IN INSTALLATION ALUMINUM CONSTRUCTION	TITUS 50F	5 - 100	6"x6"/6" Ø 9"x9"/9" Ø 12"x12"/10" Ø 12"x12"/12" Ø	SEE PLANS SEE PLANS SEE PLANS SEE PLANS	-	SEE NOTE 1
ER1	EXHAUST REGISTER LOUVERED 3/4" BLADE SPACING T-BAR LAY-IN INSTALLATION STATIONARY, EXTRUDED ALUMINUM	TITUS 350FL	5 - 100	6 x 6	-	-	SEE NOTE 1
OAL	OUTDOOR AIR LOUVER LOUVERED 3/4" BLADE SPACING SURFACE MOUNT INSTALLATION STATIONARY, EXTRUDED ALUMINUM	TITUS 350FL	120		-		SEE NOTE 1
EL1	EXHAUST AIR LOUVER LOUVERED 3/4" BLADE SPACING SURFACE MOUNT INSTALLATION STATIONARY, EXTRUDED ALUMINUM	TITUS 350FL	50 - 75 100 150 175		-	I.S.	SEE NOTE 2

Notes

- STANDARD WHITE FINISH, FINAL COLOR BY OWNER/ARCHITECT.
- STANDARD MILL FINISH, FINAL COLOR BY OWNER/ARCHITECT.
- CONCEALED MOUNTING

ACCESSORY ABBREVIATIONS:

Ø B.D. = OPPOSED BLADE DAMPER
SQ RD. = SQUARE NECK TO ROUND NECK TRANSITION
I.S. = INSECT SCREEN
D.F. = DOUBLE FLANGED

EXHAUST FAN SCHEDULE

UNIT NUMBER	EF-1 (NEW)	EF-2 (NEW)	EF-3
SERVICE	TOILET	PEDICURE	--
AIR QUANTITY - CFM	100	100	
EXTERNAL STATIC PRESSURE - INCHES OF WATER	.375	.375	
FAN TYPE	CEILING EXHAUST	CEILING EXHAUST	
DRIVE TYPE	DIRECT	DIRECT	
SOUND LEVEL (MAX) - SONES	2.0	2.0	
MOTOR HP OR WATTS/AMPS	80/1.14	80/1.14	
FAN SPEED (MAX) - RPM	--	--	
ELECTRICAL DATA - VOLTAGE/PHASE	120/1PH	120/1PH	
CONTROLS	INTERLOCK W/ LIGHT	--	
WEIGHT - POUNDS	10.0	10.0	
LOCATION	TOILET ROOM	PEDICURE AREA	
MANUFACTURER	GREENHECK	GREENHECK	
MODEL NUMBER	SP-B110	SP-B110	
REMARKS - SEE NOTES	1, 2, 3, 4, 5, 6	1, 2, 3, 4, 5, 6	
NOTES:			
1. PROVIDE WITH BACKDRAFT DAMPER			
2. PROVIDE WITH PERMANENTLY LUBRICATED MOTOR WITH BUILT-IN THERMAL OVERLOAD PROTECTION & DISCONNECT PLUG.			
3. PROVIDE WITH MANUFACTURER'S WHITE PLASTIC GRILLE.			
4. PROVIDE WITH PREWIRED SOLID STATE FAN SPEED CONTROLLER.			
5. PROVIDE WITH 0 TO 60 MINUTE TIME DELAY SWITCH, INTERLOCKED WITH ROOM LIGHT SWITCH.			
6. PROVIDE THERMOSTAT TO ENERGIZE FAN TO MAINTAIN A ROOM SETPOINT OF 50 DEG. F. TO 85 DEG. F.			

MECHANICAL NOTES - FBC, 7TH EDITION (2020)

THE MECHANICAL PLANS SHALL COMPLY WITH THE FLORIDA BUILDING CODE, 7TH EDITION (2020), INCLUDING ENERGY CONSERVATION AND ALL LOCAL CODES AS MAY BE APPLICABLE. SIX SHOP DRAWINGS SUBMITTALS OF ALL MAJOR EQUIPMENT SHALL BE REQUIRED FOR APPROVAL PRIOR TO ORDERING AND PROCUREMENT OF SAME.

A. THE HVAC CONTRACTOR SHALL INCLUDE THE FURNISHING OF ALL LABOR AND MATERIALS TO COMPLETE THE AIR CONDITIONING, HEATING, AND VENTILATING WORK AS SHOWN ON THE DRAWINGS TO INCLUDE, BUT NOT BE LIMITED TO THE FOLLOWING:

- ALL PERMIT FEES
- ALL AIR CONDITIONING EQUIPMENT
- EXHAUST FANS AND SYSTEMS
- MOTORS AND STARTERS/EQUIPMENT FURNISHED UNDER THIS WORK
- SUPPLY AND RETURN DUCTWORK
- FILTERS, DRIVES & STARTERS, ETC.
- CONDENSATE DRAIN PIPING
- CONTROLS INCLUDING THERMOSTATS AND LOW VOLTAGE WIRING
- EQUIPMENT SUPPORTS, HANGERS, ETC.
- TEST AND BALANCE OF ALL SYSTEMS
- CONDENSATE PIPING

- ALL AIR HANDLERS SHALL HAVE AUXILIARY DRAIN PANS WITH AUXILIARY DRAINS PIPED TO A CONSPICUOUS LOCATION AT THE EXTERIOR OF THE BUILDING. INSULATE CONDENSATE PIPE WITH 1/2" ARMAFLEX.
- CONDENSATE AND EMERGENCY CONDENSATE DRAINS SHALL BE SCHEDULE 40 PVC ASTM 2905
- SLOPE HORIZONTAL CONDENSATE DRAINS A MINIMUM OF 1/4" PER FOOT.

C. SUPPLY AND RETURN DUCTWORK

- ALL CONCEALED DUCTWORK SHALL BE GALVANIZED SHEET METAL CONSTRUCTED AS PER THE LATEST SMACNA RECOMMENDATIONS, AS WELL AS ANY APPLICABLE LOCAL CODES, OR APPROVED EQUAL.

DUCTS AS FOLLOWS:

DUCT IDENTIFICATION	PRESSURIZATION CLASS	SEAL CLASS
VAULT TRUNK MAINS	3" W.G./35" STD"	"B"
LOW VELOCITY DUCTS	1" W.G./STD"	"C"
OTHER RETURN/EXHAUST	STD"	"C"

ASTM A653/A694 DOUBLE WALL INSULATED SPIRAL DUCTWORK WITH A MINIMUM 1" THICKNESS GLASS FIBER EROSION RESISTANT INSULATION BETWEEN EACH WALL. DUCTWORK SHALL BE EQUAL TO LINDAB SAFE DUCT SYSTEM.

- FLEXIBLE AIR DUCTS SHALL BE "WIREDLOUT" TYPE WG, CLASS 1, AND UL LISTED, WITH SMOOTH GRAY POLYVINYL OVER 1/2" FIBERGLASS INSULATION. MAXIMUM LENGTH SHALL NOT EXCEED SIX (6) FEET MEASURED ALONG CENTERLINE OF DUCT AND DIFFUSERS SHALL HAVE METAL ELBOWS AND DROP CONNECTIONS. SECURE TO DUCT AND COLLARS WITH VENTLOCK #670 S.S. CLAMPS WITH WORKER HEAT HEAD SCREWS.
- FLEXIBLE DUCT CONNECTORS TO EQUIPMENT SHALL BE "VENT GLASS" AS MANUFACTURED BY VENTFABRICS, INC., GLASS FIBER COATED WITH DU PONT NEOPRENE, FIRE RETARDANT, ACID AND FLUME RESISTANT.
- NON-PRETREATED OUTDOOR AIR INTAKE AND EXHAUST DUCT SHALL BE GALVANIZED SHEET METAL, NO INSULATION. PRE-TREATED OUTSIDE AIR SHALL BE INSULATED WITH R-4.2 IN CONDITIONED SPACES, AND R-6 FOR OUTSIDE AIR DUCTS ROUTED THROUGH UNCONDITIONED SPACES.
- ALL SUPPLY COLLARS OFF MAIN TRUNK LINES SHALL HAVE MANUAL VOLUME DAMPERS. WHERE THE DAMPER IS NOT ACCESSIBLE, AN OPPOSED BLADE DAMPER OR BUTTERFLY DAMPER SHALL BE PROVIDED.
- PROVIDE OPPOSED BLADE DAMPERS ON ALL SUPPLY AIR GRILLES. PROVIDE CABLE OPERATED BALANCING DAMPERS FOR NON-ACCESSIBLE GRILLES. SPIN-IN FITTINGS WITH DAMPERS ARE APPROVED TO SUBSTITUTE FOR AN OPPOSED BLADE DAMPER IF THE DAMPER IS MARKED AND ACCESSIBLE.
- ALL OUTSIDE AIR CONNECTIONS TO EACH SYSTEM SHALL BE PROVIDED WITH A VOLUME DAMPER.
- ALL SYSTEMS REQUIRING GREATER THAN 300 CFM OF OUTSIDE AIR SHALL BE EQUIPPED WITH A MOTORIZED DAMPER. ALL SYSTEMS REQUIRING LESS THAN 300 CFM OF OUTSIDE AIR SHALL BE EQUIPPED WITH A GRAVITY DAMPER.
- AIR SYSTEMS CAPABLE OF SUPPLYING GREATER THAN 2000 CFM OF SUPPLY AIR SHALL BE EQUIPPED WITH A DUCT SMOKE DETECTOR ON THE SUPPLY SIDE OF THE UNIT. THE DUCT SMOKE DETECTOR SHALL SHUT THE UNIT DOWN AND NOTIFY OCCUPANTS. ALL DUCT SMOKE DETECTORS SHALL COMPLY WITH SECTION 606.4.1 FMC IN GENERAL. TEST STATIONS OR FIRE ALARM CONNECTIONS ARE NOT INDICATED ON DRAWINGS BUT SHALL BE PROVIDED AS REQUIRED.

D. EXHAUST SYSTEMS

- EXHAUST OUTLETS FOR DUCTS CONVEYING NOXIOUS GASES, FLAMMABLE VAPORS, CORROSIVE VAPORS, AND DUCTS SERVING COMMERCIAL FOOD COOKING AND PROCESSING EQUIPMENT, SHALL TERMINATE OUTSIDE THE BUILDING AND SHALL BE LOCATED 1' FROM ANY ADJACENT BUILDING, PARKING AREA, ADJACENT PROPERTY LINE, WINDOW, DOOR OR AIR INTAKE OPENING AND SHALL BE LOCATED AT LEAST 10' ABOVE THE ADJOINING GRADE.

E. REFRIGERANT LINES

- SIZE ALL REFRIGERANT LINES TO MEET THE MANUFACTURERS RECOMMENDATIONS MAY REQUIRE LONG LINE ACCESSORIES WHEN CONDENSING UNITS ARE INSTALLED ABOVE THE AIR HANDLER. THE REFRIGERANT LINES SHALL BE INSTALLED ACCORDING TO THE MANUFACTURERS RECOMMENDATIONS AND INSTALLED TO ENSURE OIL IS RETURNED BACK THE THE CONDENSING UNIT.
- INSULATE ALL SUCTION LINES WITH 3/4" ARMAFLEX INSULATION, INSTALLED TO MEET THE MANUFACTURERS INSTRUCTIONS AND APPLICABLE ENERGY CODES.
- ANY REFRIGERANT LINES RUNNING UNDERGROUND SHALL BE WITHIN A PVC PIPE CHASE.

F. CEILING AND WALL DIFFUSERS

- ALL CEILING AND WALL SUPPLY AND RETURN AIR DIFFUSERS SHALL BE OF ALUMINUM CONSTRUCTION, EXCEPT WHEN PENETRATING A RATED WALL OR CEILING ASSEMBLY WHEN STEEL DIFFUSERS RATED FOR THE PARTICULAR APPLICATION ARE REQUIRED.
- ALL AIR DISTRIBUTION SHALL BE EQUAL TO THAT INDICATED ON THE DRAWINGS.
- CEILING AIR DEVICES ARE INDICATED ON THESE PLANS BASED ON OPTIMAL PERFORMANCE AND AIR DISTRIBUTION. REFER TO ARCHITECTURAL REFLECTED CEILING PLAN FOR EXACT LOCATION OF ALL OTHER CEILING DEVICE LOCATIONS. COORDINATE FINAL LOCATION WITH ALL OTHER TRADES AND CEILING MOUNTED DEVICES.

G. THERMOSTATS

- EACH AIR CONDITIONING SYSTEM SHALL HAVE A 24 VOLT THERMOSTAT MOUNTED AT 4'-0" ABOVE FINISHED FLOOR. THERMOSTATS SHALL BE ONE STAGE COOL, ONE STAGE HEAT, WITH AUTO-ON FAN SWITCH AND "HEAT-OFF" COOL" SYSTEM SWITCH. PROVIDE TWO STAGE COOL AND TWO STAGE HEAT THERMOSTATS FOR TWO STAGE UNITS, WHERE REQUIRED. PROVIDE LISTED THERMOSTATS THAT ARE SHOWN ON THE EQUIPMENT SCHEDULE.
- HVAC CONTRACTOR SHALL FURNISH AND INSTALL ALL CONTROL WIRING AND CONDUIT AS REQUIRED.

H. TESTING AND BALANCING

- HVAC SUBCONTRACTOR SHALL PROVIDE AN INDEPENDENT (NOT EMPLOYED BY THE SUBCONTRACTOR) TEST AND BALANCE FIRM WHICH SPECIALIZES IN THE BALANCING AND TESTING OF HEATING, VENTILATING, AND AIR CONDITIONING SYSTEMS. THEY SHALL BALANCE AND RESIST AIR MOVING EQUIPMENT AND AIR DISTRIBUTION AND EXHAUST SYSTEMS TO THE FLOW RATES INDICATED ON THE HVAC SCHEDULES AND PLANS. REPORTS SHALL BE ON STANDARD SMACNA OR ASSOCIATED AIR BALANCE COUNCIL FORMS AND SUBMITTED TO THE ARCHITECT/ENGINEER PRIOR TO APPLICATION FOR FINAL PAYMENT.
- TESTING AND BALANCE PERSONNEL SHALL BE APPROVED BY THE OWNER'S REPRESENTATIVE AND SHALL BE NEED CERTIFIED AND SHALL PROVIDE PROOF OF HAVING SUCCESSFULLY COMPLETED AT LEAST FIVE (5) PROJECTS OF SIMILAR SIZE AND SCOPE.
- AIR BALANCE TESTING SHALL NOT BEGIN UNTIL SYSTEMS HAVE BEEN COMPLETED AND ARE IN FULL WORKING ORDER. THE HVAC CONTRACTOR SHALL MAKE ALL PRELIMINARY TESTS AND ADJUSTMENTS, SHALL PLACE ALL SYSTEMS AND EQUIPMENT INTO FULL OPERATION AND CONTINUE THE OPERATION DURING EACH WORKING DAY OF THE TESTING AND BALANCING.
- INCLUDE AN EXTENDED WARRANTY OF TWELVE (12) MONTHS AFTER COMPLETION OF THE TEST AND BALANCE WORK, DURING WHICH TIME, REQUESTS MAY BE MADE TO RECHECK, OR FOR RESETTNG OF ANY OUTLETS, SUPPLY FAN, OR EXHAUST AS LISTED IN THE TEST REPORT. PROVIDE ANY TECHNICIANS TO ASSIST IN MAKING ANY TEST REQUIRED. IF SYSTEM IS NOT WORKING PROPERLY, IT SHALL BE REBALANCED ANY TIME DURING THE FIRST YEAR OF OPERATION, AFTER THE SPACE IS OCCUPIED. ADDITIONAL BALANCING WILL BE REQUIRED TO ACCOMMODATE THE ACTUAL OCCUPANCY REQUIREMENTS. ALSO, PROVIDE FOR BALANCING DURING WINTER OR SUMMER OPERATION. ALL OF THE ABOVE SHALL BE PROVIDED AT NO ADDITIONAL COST TO THE OWNER. REPLACEMENT OF ADJUSTABLE PULLEYS, ADDITIONAL BALANCING DAMPERS, PRESSURE PORTS, AND FITTINGS, ETC., REQUIRED TO EFFECT PROPER AIR BALANCE SHALL BE FURNISHED AND INSTALLED BY THE HVAC SUBCONTRACTOR AT NO ADDITIONAL COST TO THE OWNER.
- THE FINAL TEST AND BALANCE REPORT FURNISHED TO THE GENERAL CONTRACTOR SHALL INCLUDE A LIST OF ITEMS THAT REQUIRE REPAIR OR ADJUSTMENT.
- ALL AIR FILTERS AND STRAINERS SHALL BE CLEANED OR REPLACED BY THE HVAC SUBCONTRACTOR BEFORE PROCEEDING WITH THE TEST AND BALANCE.
- ALL PROGRAMMABLE THERMOSTATS SHALL BE SET SO THAT THE BLOWER OPERATES CONTINUOUSLY DURING ALL OCCUPIED TIMES TO INSURE THE PROPER AMOUNT OF VENTILATION AIR IS PROVIDED. THE BLOWER SHALL BE SET IN THE AUTO POSITION FOR ALL UNOCCUPIED PERIODS.

ANY DEVIATIONS FROM PLANS TO BE FULLY DOCUMENTED. THE CONTRACTOR SHALL TURN OVER AS-BUILT DOCUMENTS TO THE ARCHITECT AT THE COMPLETION OF THE PROJECT.

NOTICE TO CONTRACTOR: REVISIONS TO THESE DRAWINGS AND CERTIFICATION THERETO WHICH MAY BE REQUIRED BECAUSE OF CONTRACTOR OPTED REVISIONS, SHALL BE COMPENSATED TO THE ENGINEER BY THE REQUESTING CONTRACTOR. PAYMENT SHALL BE REQUIRED AT THE TIME OF CERTIFICATION DELIVERY.

THE DESIGN PROFESSIONAL WAIVES ANY AND ALL RESPONSIBILITY AND LIABILITY FOR PROBLEMS WHICH ARISE FROM FAILURE TO FOLLOW THESE PLANS, SPECIFICATIONS AND THE DESIGN INTENT THEY CONVEY, OR FOR PROBLEMS WHICH ARISE FROM OTHERS' FAILURE TO OBTAIN AND/OR FOLLOW THE DESIGN PROFESSIONAL'S GUIDANCE WITH RESPECT TO ANY ERRORS, OMISSIONS, INCONSISTENCIES, AMBIGUITIES OR CONFLICTS WHICH ARE ALLEGED.

THE CU/AHU UNITS ARE FOR DESIGN PURPOSES ONLY, CONTRACT/OWNER TO SELECT FINAL AHUs AND CUs. OWNER/CONTRACTOR SELECTED UNITS TO BE EQUAL TO OR BETTER THAN DESIGN UNITS.

DX SPLIT SYSTEM MECHANICAL EQUIPMENT SCHEDULE

INDOOR UNIT							ELECTRICAL		OUTDOOR UNIT				ELECTRICAL		SYSTEM DATA			NOTES
MARK	CFM	O.A. CFM	EXT. S.P.	MANUFACTURER/ MODEL	HEAT TYPE	INPUT KW	VOLTS/ PHASE	MCA/ MOC	MARK	MANUFACTURER/ MODEL	QUANTITY #	TONS (EACH)	VOLTS/ PHASE	MCA/ MOC	EER/ SEER	TOTAL MBH	SENS. MBH	
AHU-1	2400	00	0.7"	CARRIER 40RUA007	ELECTRIC	10.0	208 3	38.6 40	CU-1	CARRIER 38AU2007	1	8.0	208 3	28.8 45	11.5 13.0	74.0	57.9	1, 2, 3, 4, 5

- NOTES:
- * OUTDOOR AIR PROVIDED BY MEANS OF NATURAL VENTILATION, PER FLORIDA BUILDING CODE - MECHANICAL SECTION 402.2
 - 1. PROVIDE AIR HANDLING UNIT(S) WITH SINGLE POINT POWER CONNECTION FOR ELECTRIC
 - 2. PROVIDE ON ALL DIRECT DRIVE AIR HANDLING UNIT MOTORS A UNIT MANUFACTURERS SPEED CHANGE KIT. THE FAN SPEED FOR HEATING SHALL BE SET FOR LOW OR AS NOTED ON THE MANUFACTURERS DATA SHEET, AND HIGH OR MEDIUM SPEED FOR THE COOLING TO MEET THE STATIC PRESSURE REQUIREMENTS FOR THE SYSTEM.
 - 3. PROVIDE WITH 7 DAY WALL MOUNT HEATING/COOLING PROGRAMMABLE THERMOSTAT WITH SUB-BASE PER UNIT REQUIREMENTS LISTED ABOVE (THE NUMBER OF STAGES OR STEPS).
 - 4. REFRIGERANT LINE SETS: THE MECHANICAL CONTRACTOR SHALL HAVE THE UNIT MANUFACTURER SIZE THE R410-A PIPING BASED ON THE LENGTH OF RUNS.
 - 5. INSTALL PRIMARY DRAIN LINE TO A CODE APPROVED DRAIN LOCATION. SEE THE MECHANICAL NOTES FOR SECONDARY DRAIN INSTALLATION.

LIMITED ENGINEERING FIELD INVESTIGATIONS HAVE BEEN CONDUCTED (AS AND AID TO THE CONTRACTOR), TO ILLUSTRATE EXISTING CONDITIONS. THIS DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY TO CONDUCT HIS OWN PERSONAL FIELD INVESTIGATION, WHICH MAY UNCOVER ADDITIONAL CONDITIONS, THUS IMPACTING THE INSTALLATION OF THE MECHANICAL WORK INDICATED ON THESE PLANS. RELOCATION OF EQUIPMENT MAY BE REQUIRED DUE TO FIELD CONDITIONS AND ALL OFFSETS, EXTENSIONS OR ADDED MATERIAL MAY BE REQUIRED TO MAKE THE MECHANICAL SYSTEMS COMPLETE AND OPERATIONAL AS INTENDED.

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.

K:\Unpublished\projects\22-2076 - 00551 Metro Parkway #001-Highway-High-Satin CAD FILES\Sabin_MemoRpt.rvt

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT


MECHANICAL NOTES AND SCHEDULES

SHEET: 1 of 18

SHEET NUMBER


M-0

3. MECHANICAL

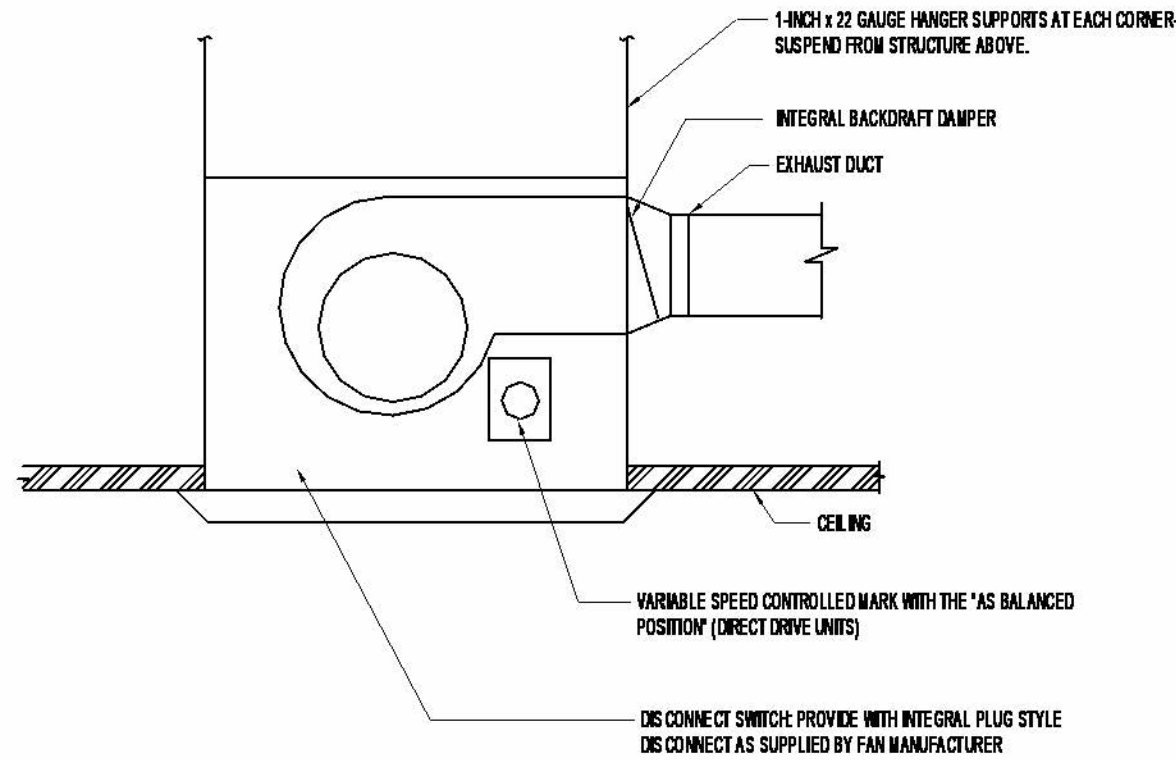


CEILING MOUNTED EXHAUST FAN DIAGRAM

NOT TO SCALE

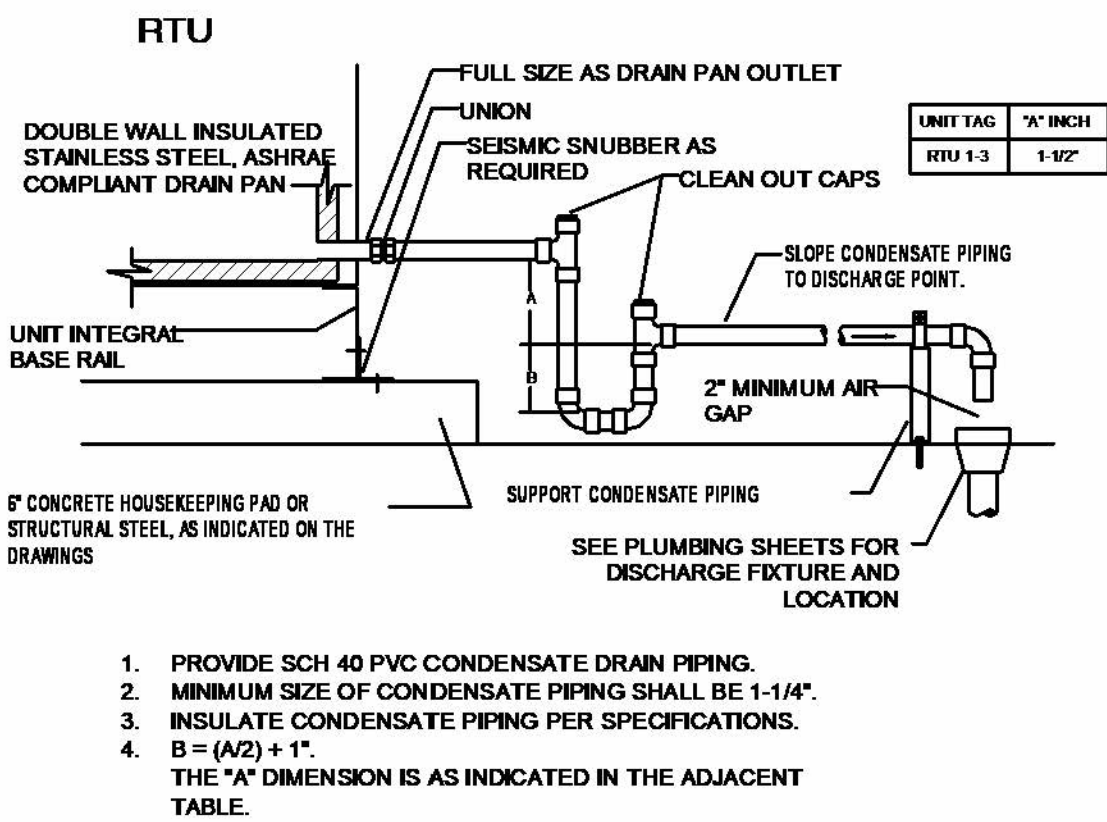


CONDENSATE DRAIN P-TRAP DETAIL

NOT TO SCALE

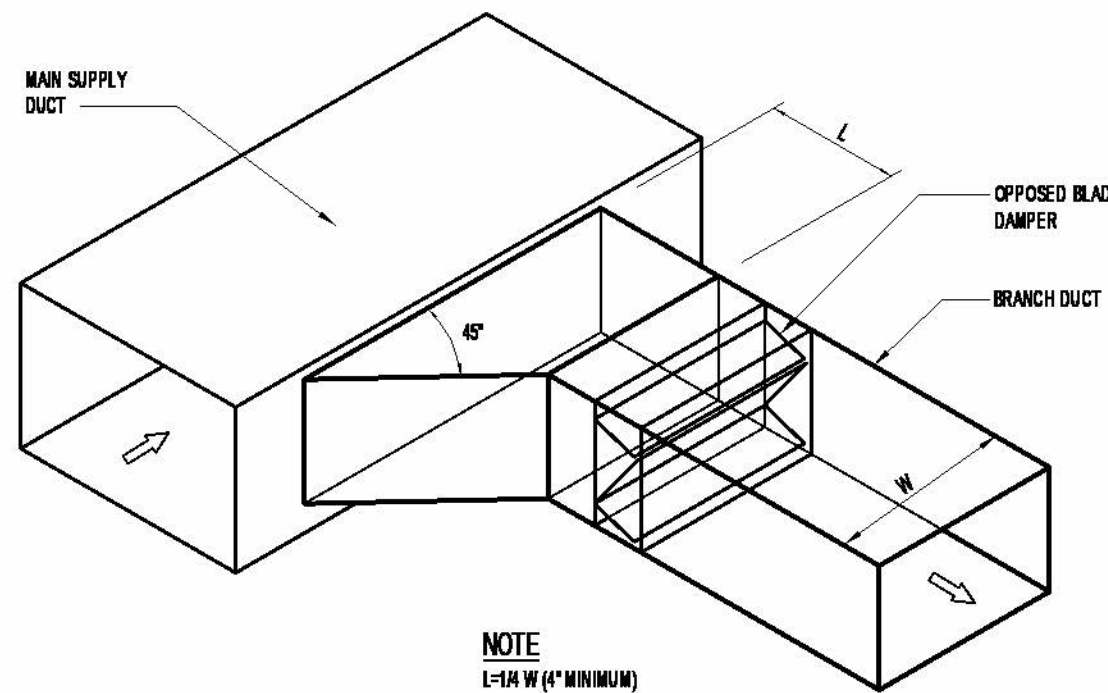


SUPPLY BRANCH DUCT DETAIL

NOT TO SCALE

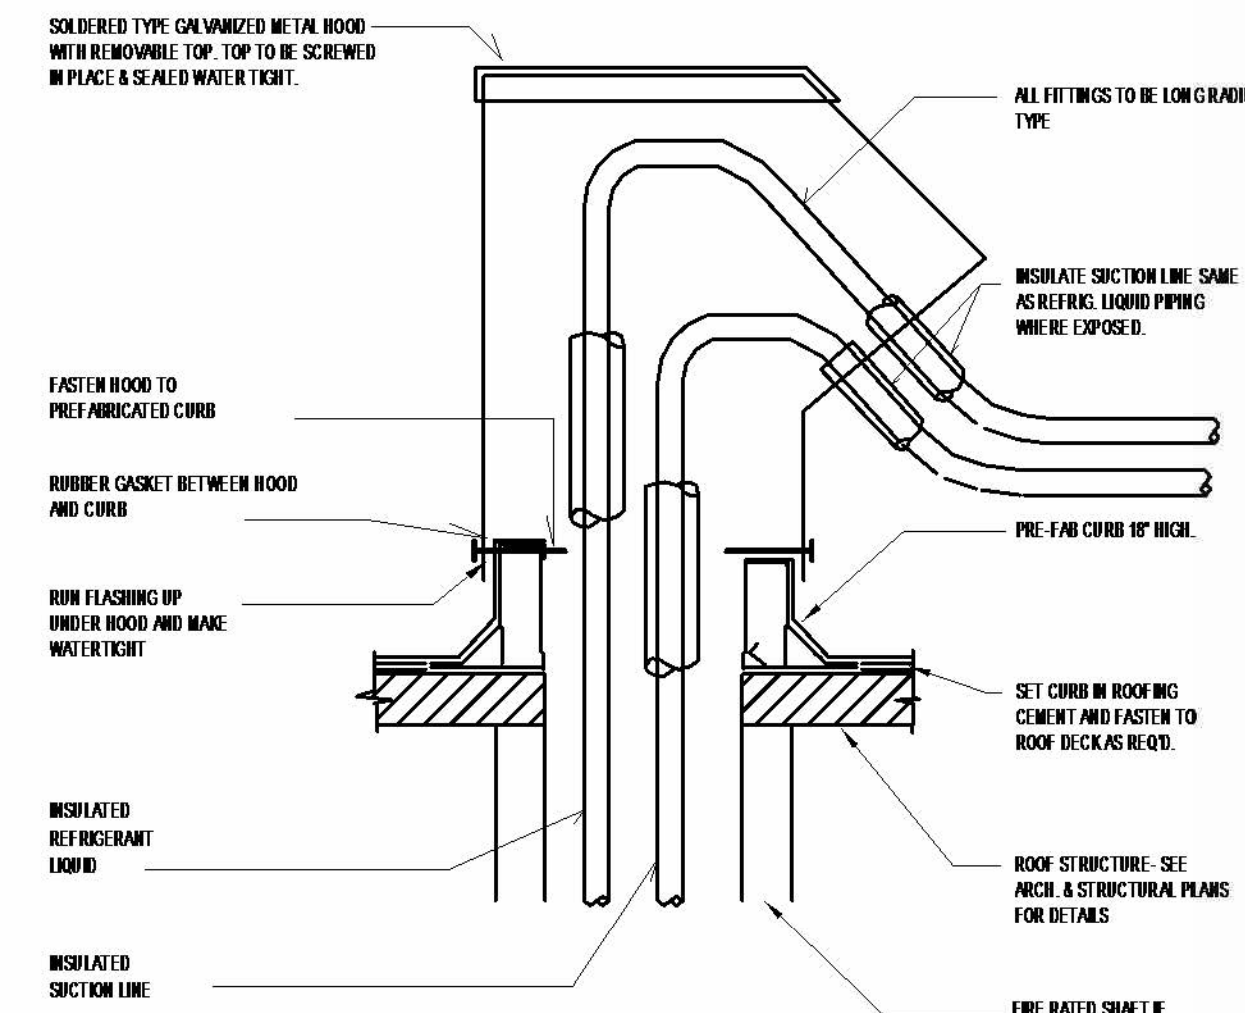


REFRIGERANT PIPING ROOF CAP DIAGRAM

NOT TO SCALE

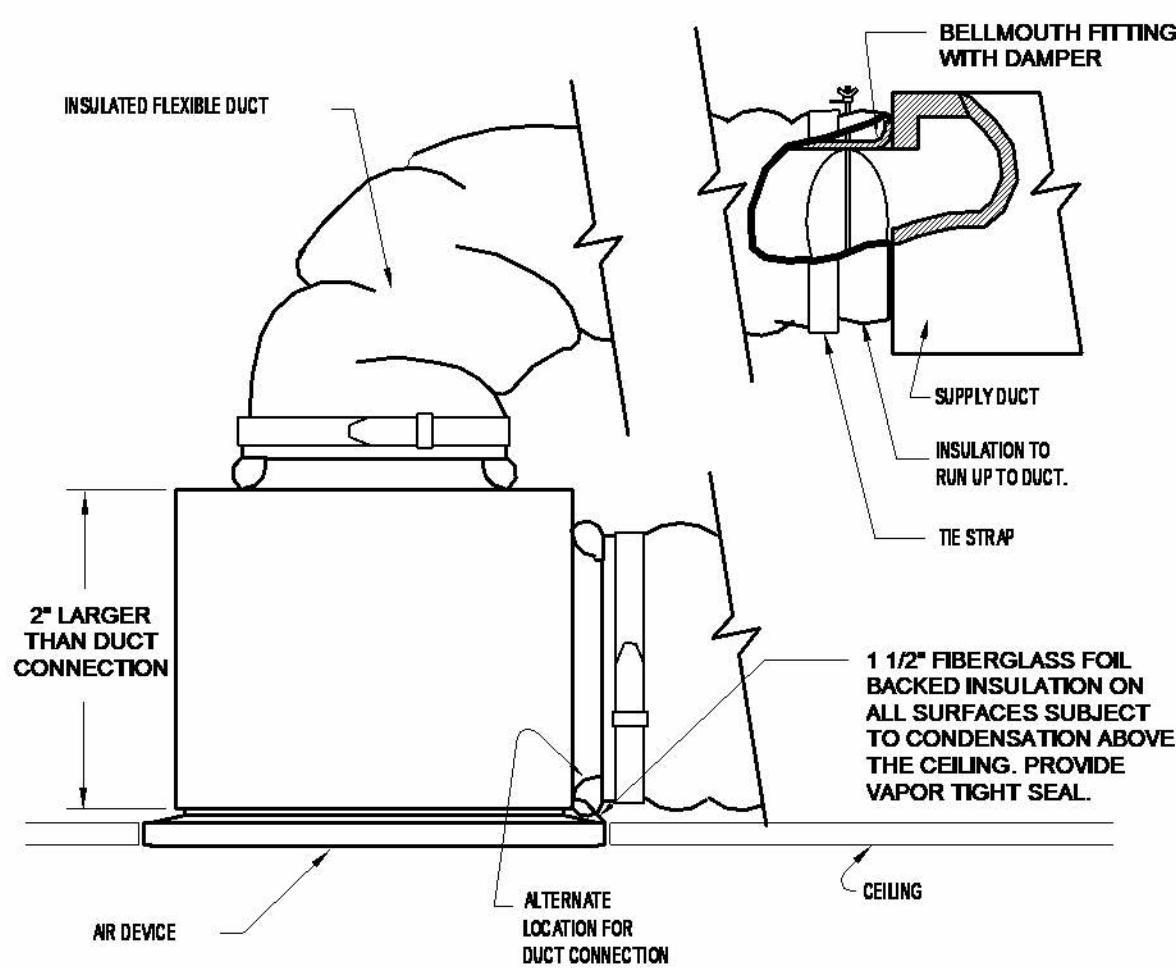


FLEXIBLE DUCT CONNECTION DETAIL

NOT TO SCALE

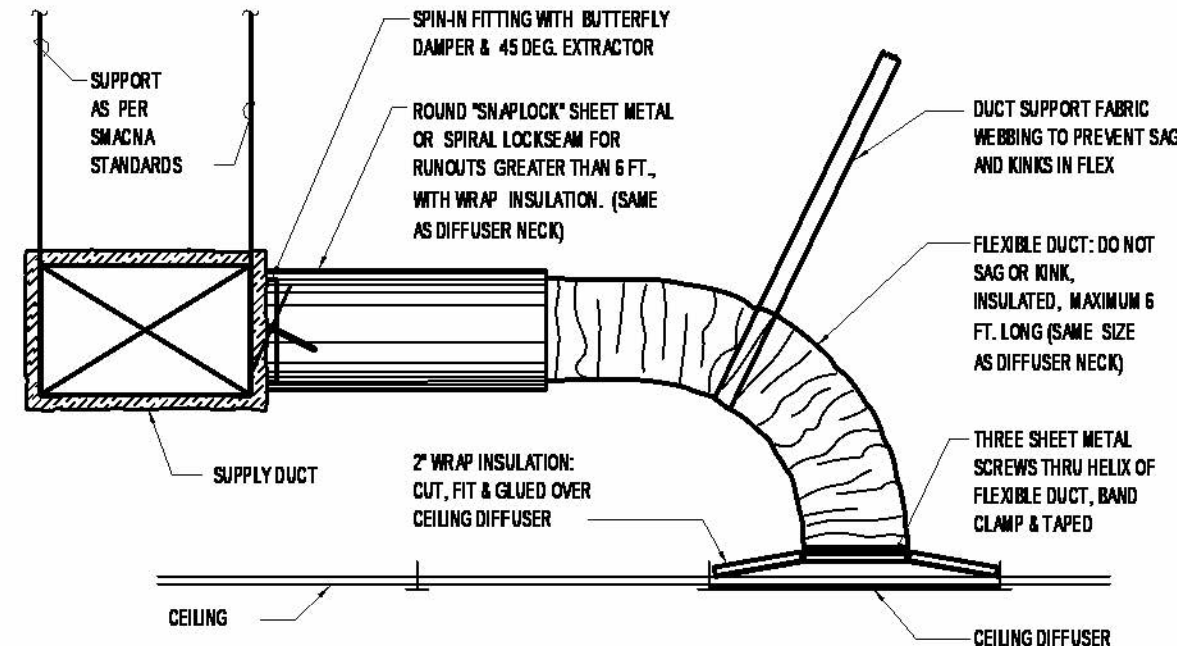


SUPPLY CEILING DIFFUSER RUNOUT DETAIL

NOT TO SCALE

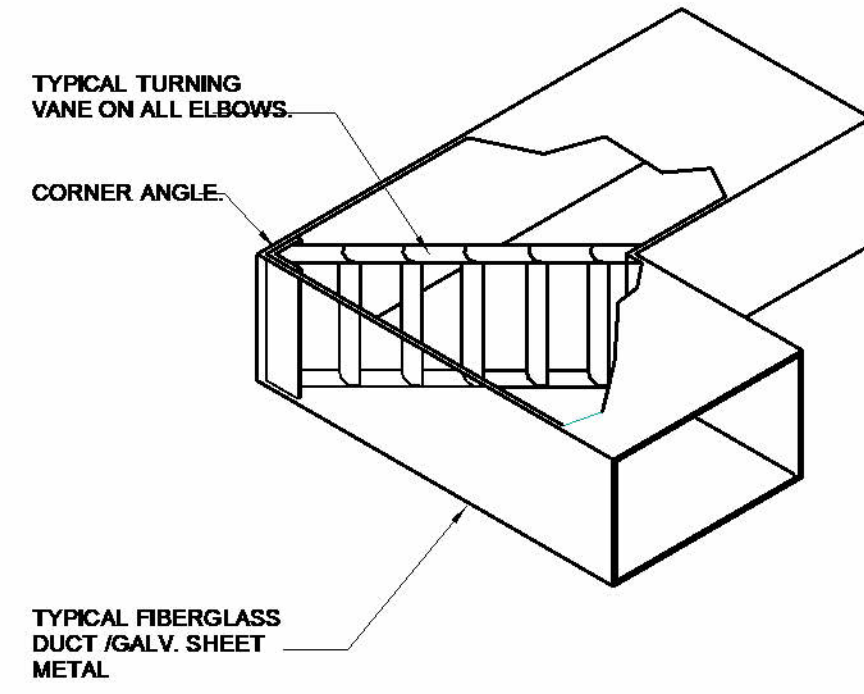


ELBOW TURNING VANE DETAIL

NOT TO SCALE

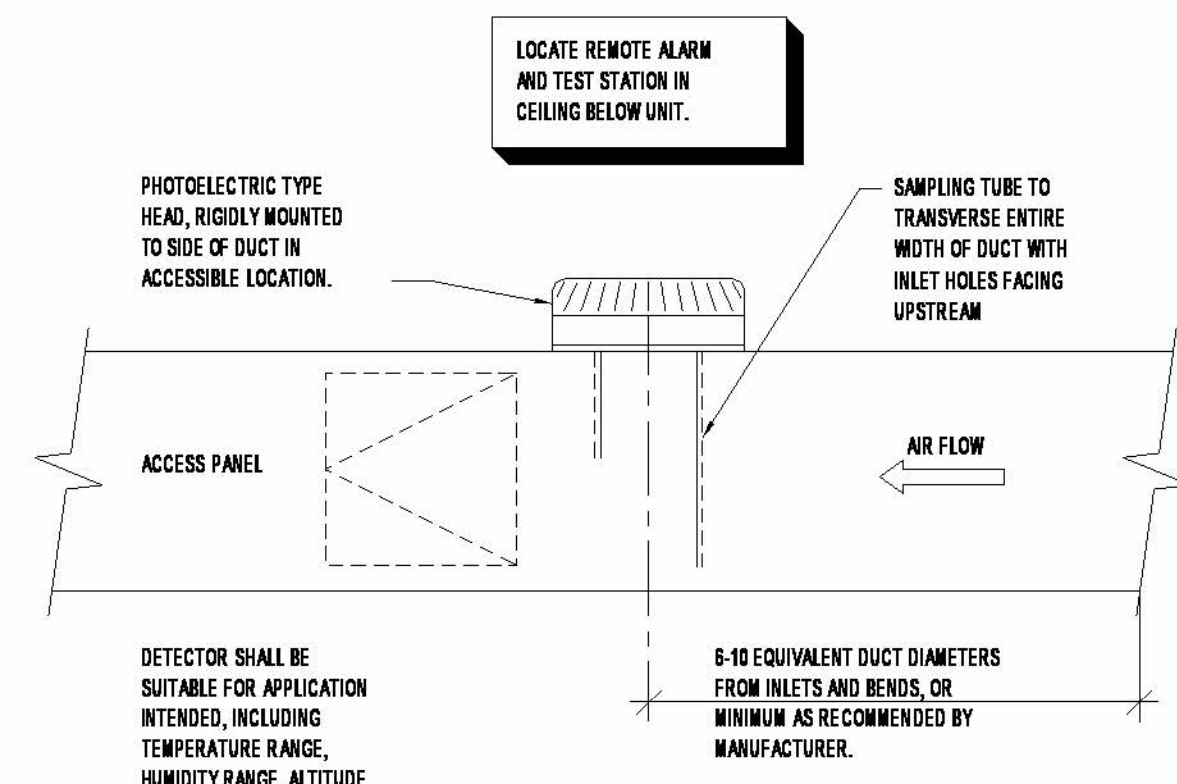


DUCT MOUNTED SMOKE DETECTOR DIAGRAM

NOT TO SCALE

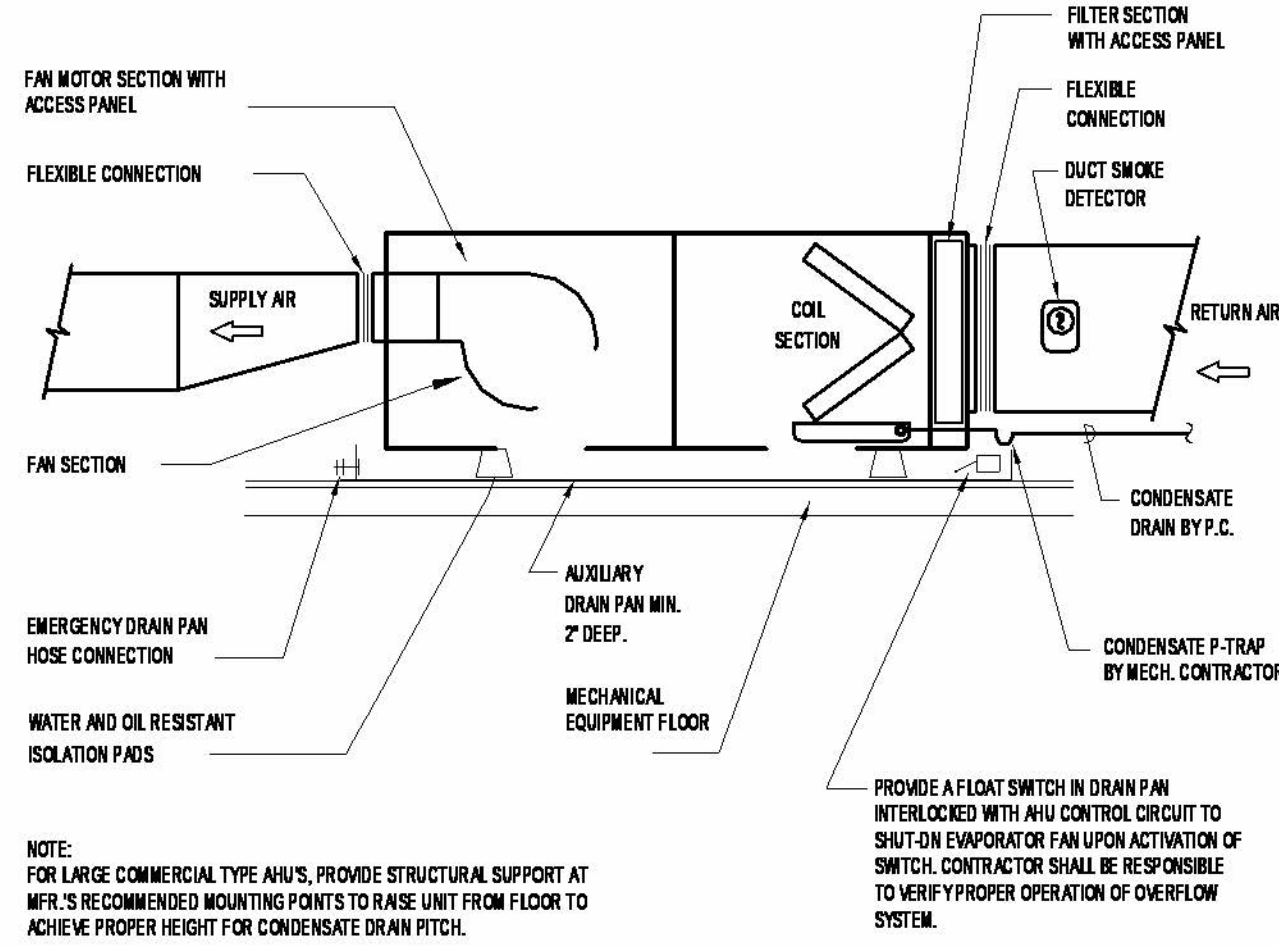

HORIZONTAL AIR HANDLER UNIT DIAGRAM

NOT TO SCALE

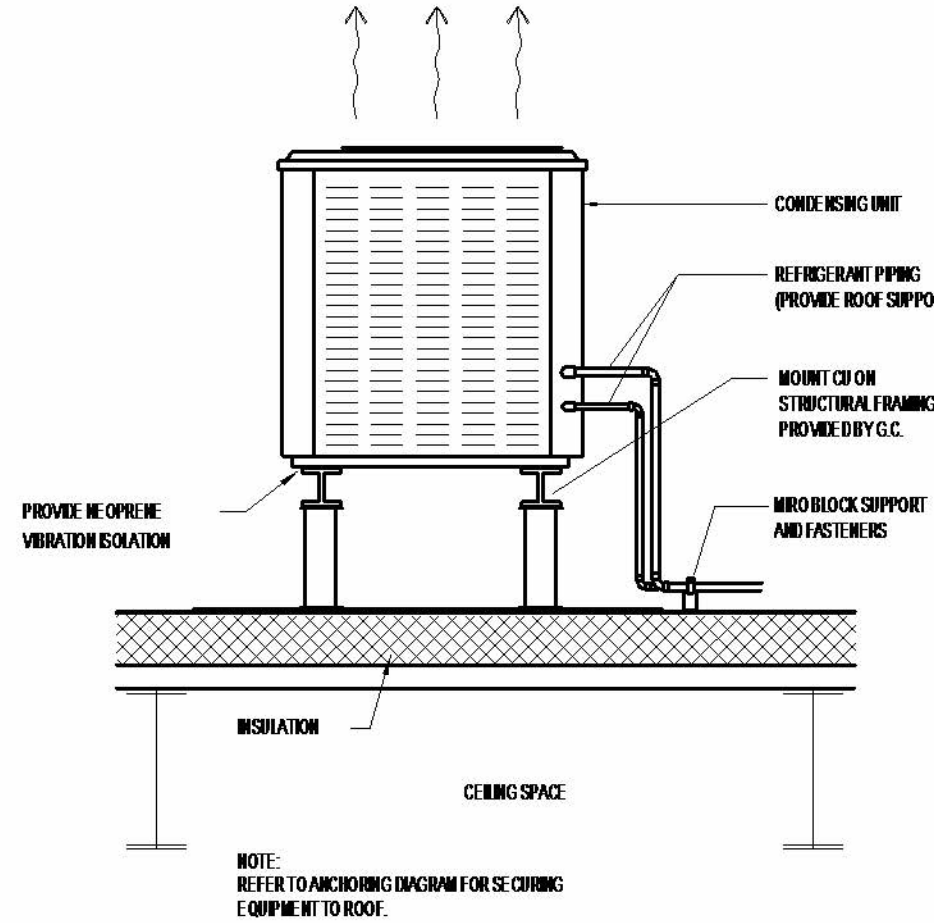

ROOF MOUNTED CU DIAGRAM

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

NO.	DESCRIPTION	DATE

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

MECHANICAL NOTES AND DETAILS

SHEET: 2 of 18


SHEET NUMBER

M-0.1

3. MECHANICAL


PLAN KEYNOTES

Key Value	Keynote Text
M2	CONTRACTOR TO VERIFY LOCATION AND SIZE OF NEW AHU
M3	NEW EXHAUST FAN, TO THE OUTSIDE. CONTRACTOR TO VERIFY SIZE AND LOCATION, EXHAUST FAN. TERMINATE EXHAUST A MINIMUM OF 15'-0" AWAY FROM ALL BUILDING OUTDOOR AIR INTAKES.
M4	EXISTING 20X12 OAL-4F AS MANUFACTURED BY METAL-AIRE OR EQ WITH BIRD SCREEN

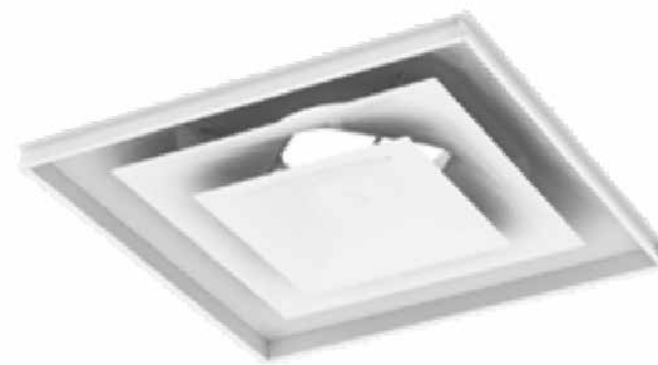ADJUSTABLE HIGH-
PERFORMANCE LAY-IN
DIFFUSER BY TITUS OR EQ

NOTE: ALL
TREATMENT, TOILET,
RETAIL AREAS TO BE
UNDER NEGATIVE
PRESSURE AT ALL
TIMES.

LIMITED ENGINEERING FIELD INVESTIGATIONS HAVE BEEN CONDUCTED (AS AND AID TO THE CONTRACTOR), TO ILLUSTRATE EXISTING CONDITIONS. THIS DOES NOT RELIEVE THE CONTRACTOR OF THE RESPONSIBILITY TO CONDUCT HIS OWN PERSONAL FIELD INVESTIGATION, WHICH MAY UNCOVER ADDITIONAL CONDITIONS, THUS IMPACTING THE INSTALLATION OF THE MECHANICAL WORK INDICATED ON THESE PLANS. RELOCATION OF EQUIPMENT MAY BE REQUIRED DUE TO FIELD CONDITIONS AND ALL OFFSETS, EXTENSIONS OR ADDED MATERIAL MAY BE REQUIRED TO MAKE THE MECHANICAL SYSTEMS COMPLETE AND OPERATIONAL AS INTENDED.

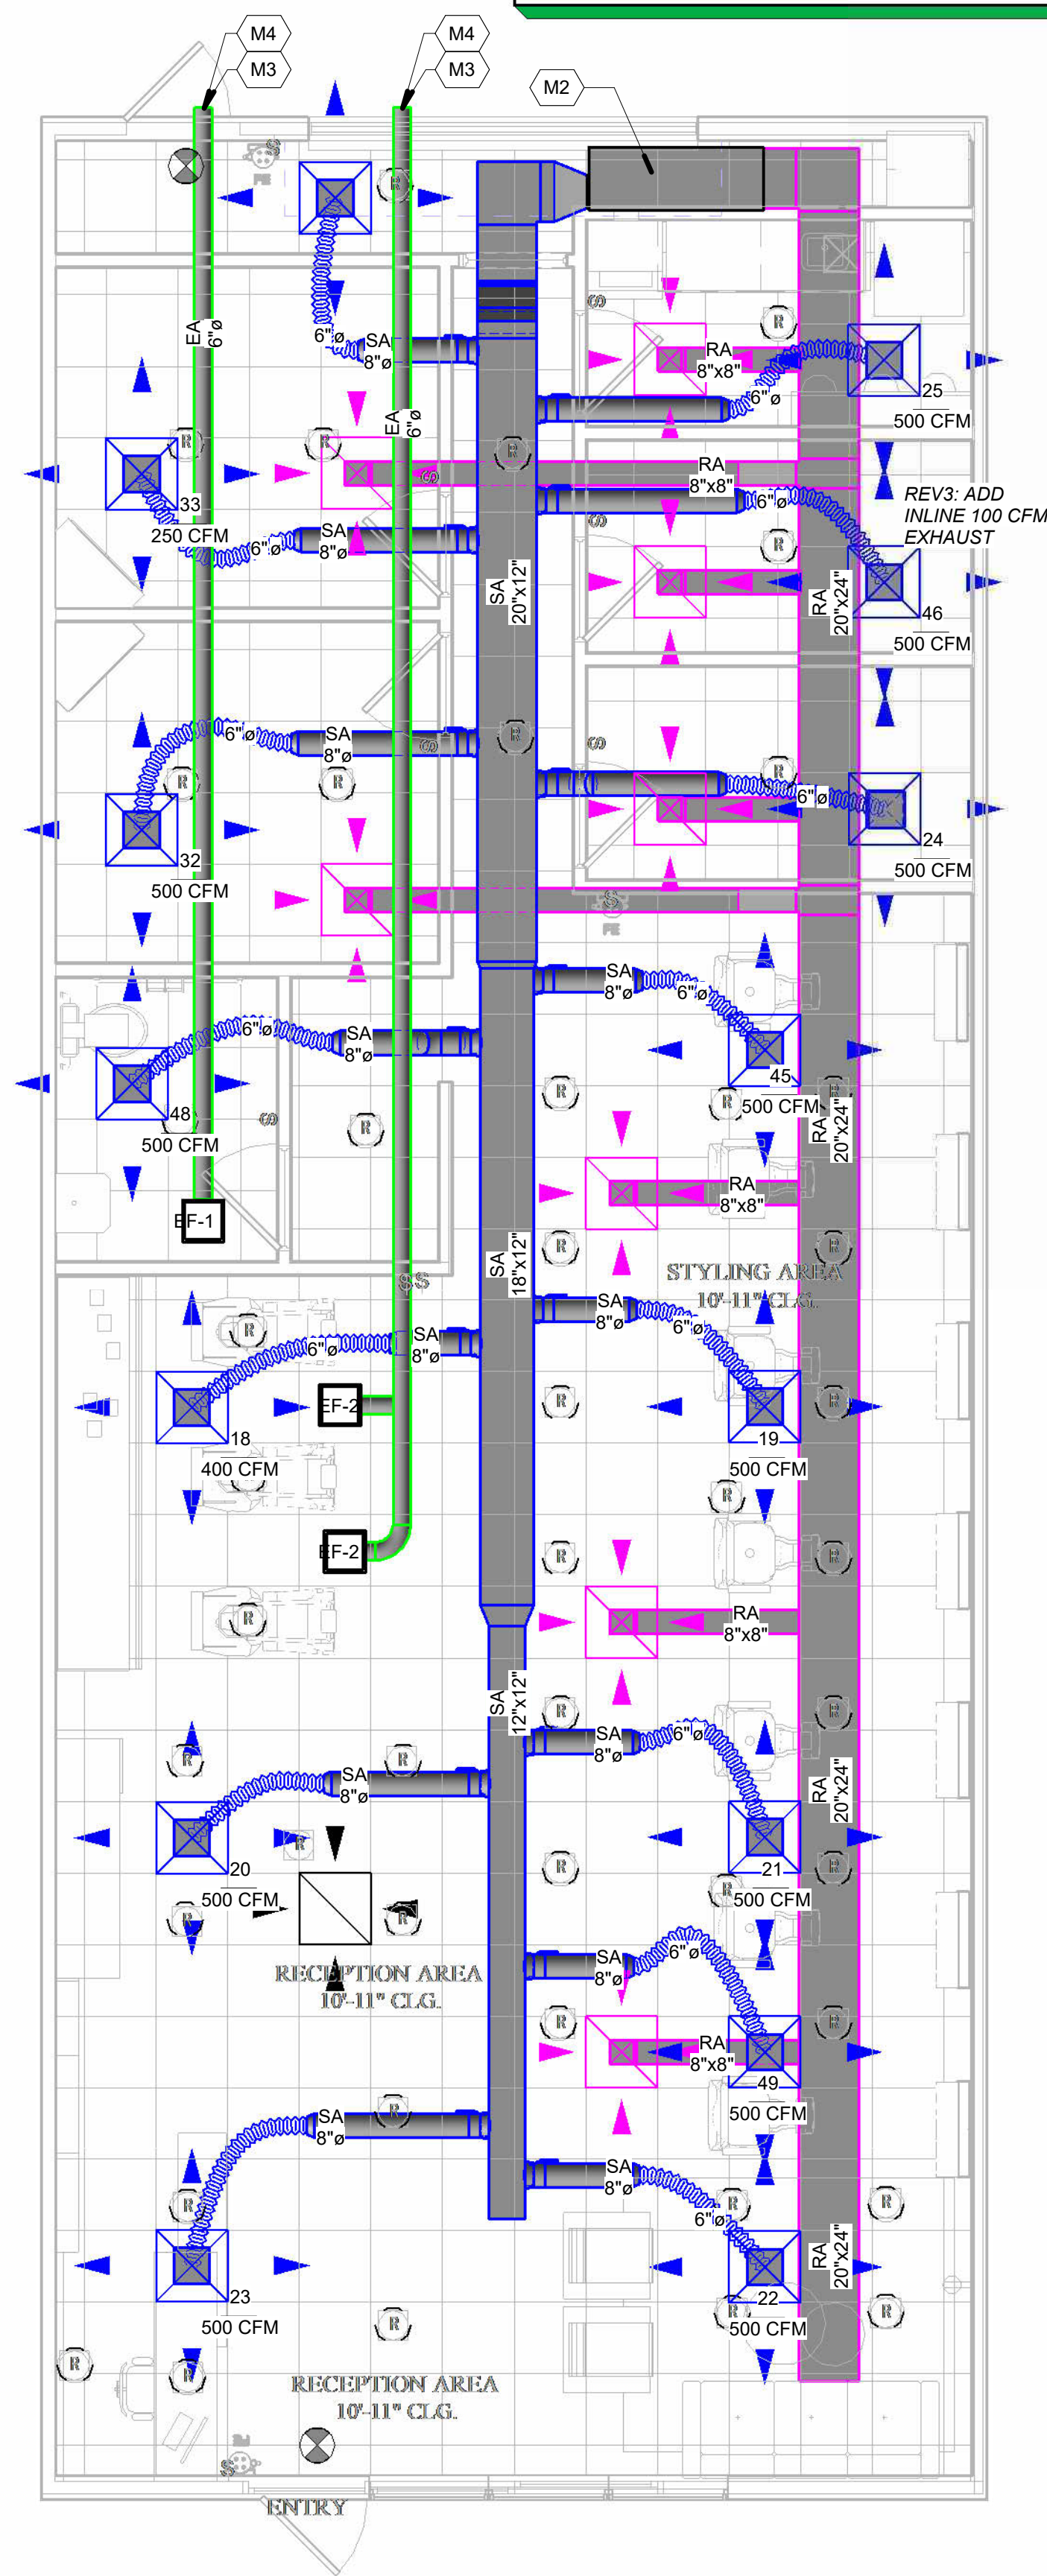

1 PROPOSED MECHANICAL PLAN
1/4" = 1'-0"

3 MECHANICAL ISOMETRIC

M-1

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

MK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

PROPOSED
MECHANICAL PLAN

SHEET: 3 of 18

SHEET NUMBER

M-1

3. MECHANICAL

GENERAL PLUMBING NOTES

- THE ENTIRE INSTALLATION, INCLUDING BUT NOT LIMITED TO WORKMANSHIP & MATERIAL, SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE FLORIDA BUILDING CODE& FLORIDA PLUMBING CODE,AND THE LATEST EDITIONS OF ALL LOCAL CODES, RULES, & AUTHORITIES HAVING JURISDICTION.
- CONTRACTOR SHALL PROVIDE WRITTEN GUARANTEE OF ALL MATERIALS & WORKMANSHIP FREE FROM DEFECTS FOR A PERIOD OF NOT LESS THAN ONE (1) YEAR FROM DATE OF ACCEPTANCE BY OWNER. CORRECTION OF ANY DEFECTS SHALL BE COMPLETED WITHOUT ADDITIONAL CHARGE & SHALL INCLUDE REPLACEMENT OR REPAIR PARTS OR EQUIPMENT.
- CONTRACTOR SHALL VISIT THE JOB SITE & THOROUGHLY FAMILIARIZE HIMSELF WITH ALL EXISTING CONDITIONS PRIOR TO BIDDING/BEGINNING ANY WORK & SHALL ADVISE ARCHITECT/ENGINEER OF ANY CONDITIONS WHICH MODIFY THE SCOPE OF WORK AS SHOWN ON THE DOCUMENTS. SUBMISSION OF A BID PROPOSAL WILL BE CONSTRUED AS EVIDENCE THAT SUCH AN EXAMINATION HAS BEEN MADE & LATER CLAIMS FOR MOBILIZATION, LABOR, EQUIPMENT, AND/OR MATERIALS REQ'D BECAUSE OF DIFFICULTIES ENCOUNTERED WILL NOT BE RECOGNIZED.
- ALL MATERIALS SHALL BE NEW & BEAR UNDERWRITER'S LABEL (UL) WHERE APPLICABLE.
- ALL WORK SHALL BE PERFORMED BY A LICENSED PLUMBING CONTRACTOR IN A FIRST CLASS WORKMANLIKE MANNER. THE COMPLETED SYSTEM SHALL BE FULLY OPERATIVE & ACCEPTANCE BY THE ARCHITECT/ENGINEER MUST BE A CONDITION OF THIS CONTRACT.
- ALL EXCAVATION & BACKFILL AS REQ'D FOR THIS PHASE OF CONSTRUCTION SHALL BE A PART OF THIS CONTRACT.
- REQUIRED INSURANCE SHALL BE PROVIDED BY THE CONTRACTOR FOR PROTECTION AGAINST PUBLIC LIABILITY & PROPERTY DAMAGE FOR THE DURATION OF WORK.
- CONTRACTOR SHALL SECURE & PAY FOR ALL PERMITS, FEES, SERVICE REQUESTS, INSPECTIONS, & TESTS.
- CONTRACTOR SHALL INCLUDE BID FOR GROUND PENETRATING RADAR (GPR) OR X-RAY TO SLAB IN ORDER TO LOCATE EXISTING UTILITIES IN REINFORCED CONCRETE (POST TENSION CABLES, ELECTRIC CABLES, PLUMBING, FIBER OPTICS). IN CONCRETE REBAR, VOIDS, SLABS THICKNESS, CONDUITS EMBEDDED IN CONCRETE (SLABS, WALLS, BALCONIES, AND COLUMNS).
- ALL WORK SHALL BE COORDINATED WITH OTHER TRADES TO AVOID INTERFERENCE WITH THE PROGRESS OF CONSTRUCTION. ADVISE ARCHITECT OF DISCREPANCIES PRIOR TO BEGINNING CONSTRUCTION.
- VERIFY LOCATION, SIZE, & INVERTS OF ALL EXISTING UTILITIES PRIOR TO BIDDING/BEGINNING CONSTRUCTION. ADVISE ARCHITECT/ENGINEER OF ANY DISCREPANCIES.
- PIPING MATERIALS:
WATER: SCHEDULE 40 DWV PVC,

DRAIN, WASTE, & VENT: SCHEDULE 40 DWV PVC,

GAS: SCHEDULE 40 METALLIC PIPE ABOVE GROUND. IN PROTECTIVE PLASTIC SLEEVE WHEN UNDERGROUND.

CONDENSATE: TYPE "L" COPPER IN 1" ARMAFLEX. SCHEDULE 40 PVC INSULATED, USE HEAT WRAP UNDER FREEZING CONDITIONS.

VALVES: BRONZE RATED AT 125 PSI.

- SEPARATION OF WATER SERVICE & BUILDING SEWER SHALL BE MIN 5 FEET. IF PIPES ARE LESS THAN 5 FEET APART, WATER SERVICE PIPE SHALL BE MIN 12 INCHES ABOVE SEWER PIPE.
- UNDERGROUND PIPE SHALL BE LAID IN WELL COMPACTED EARTH. IF GROUND IS UNSTABLE, PIPE SHALL BE SUPPORTED WITH HANGERS SUSPENDED FROM CONCRETE BLOCK.
- PROVIDE HEAT TRACING ON ALL PIPES SUBJECT TO FREEZING. PIPING INCLUDES BUT IS NOT LIMITED TO SANITARY, GREASE WASTE, STORM DRAINAGE, CONDENSATE DRAINAGE, & COLD WATER INSTALLED IN UNCONDITIONED SPACES.
- ALL FIRE MAINS, WATER DISTRIBUTION, STORM DRAINAGE, CONDENSATE DRAINAGE, & GAS PIPING SHALL HAVE CLEARLY MARKED IDENTIFICATION & FLOW DIRECTION BANDS. GAS PIPING SHALL BE MARKED EVERY 15 FEET.
- ISOLATE COPPER PIPE FROM HANGER OR SUPPORTS WITH ISOLATOR PAD (HAIR FELT LINING).
- DIELECTRIC COUPLINGS ARE REQUIRED BETWEEN ALL DISSIMILAR METAL IN PIPING & EQUIPMENT CONNECTIONS.
- ALL METALLIC PIPING, FITTINGS, & HANGERS EXPOSED TO CORROSIVE CONDITIONS SHALL HAVE A PROTECTIVE COATING THAT APPROPRIATELY RESISTS CORROSION.
- FURNISH & INSTALL APPROVED WATER HAMMER ARRESTORS WHERE QUICK-CLOSING VALVES ARE UTILIZED. UNLESS OTHERWISE APPROVED, WATER HAMMER ARRESTORS SHALL CONFORM TO ASSE 1010 & SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S SPECIFICATIONS.
- ALL FIXTURES MUST BE PROVIDED WITH READILY ACCESSIBLE STOPS & APPROPRIATELY MARKED ACCESS PANELS. COORDINATE LOCATIONS WITH GC PRIOR TO INSTALLATION.
- PROVIDE ACCESS PANELS FOR ALL CONCEALED VALVES.
- CLEANOUTS SHALL BE OF SAME MATERIALS AS PIPING. WALL CLEANOUTS SHALL BE PLACED AT THE BOTTOM OF EACH STACK. FLOOR CLEANOUTS SHALL BE PLACED AT EVERY 90° CHANGE. PROVIDE HEAVY DUTY BRONZE COVER CLEANOUTS IN TRAFFIC AREAS & EVERY 100 FEET. PROVIDE PVC PLUG IN LANDSCAPE AREAS.
- ALL PIPING SHALL BE SECURED USING METHODS OF STRAPPING & HANGING APPROVED BY CODE.
- ALL PIPING THROUGH FOUNDATION WALLS SHALL BE ENCASED IN PROTECTIVE SLEEVES.
- ALL PIPING THROUGH FIRE RATED FLOORS & WALLS SHALL BE FIRE STOPPED USING UL LISTED METHOD ACHIEVING EQUAL RATING AS PENETRATED FLOOR OR WALL.
- FURNISH REQUIRED FLASHING TO ROOFING CONTRACTOR FOR PIPES PENETRATING ROOF.
- PROVIDE 1/2" TRAP PRIMER LINE FOR ALL DRAINS FROM THE NEAREST PLUMBING FIXTURE. CONTRACTOR HAS OPTION FOR UTILIZING INVERTED WYE FITTING FROM FIXTURE DRAIN TAILPIECE OR PRECISION PLUMBING PRODUCTS AUTOMATIC PRIMER WITH INTEGRAL BACKFLOW PREVENTER & VACUUM BREAKER.
- ALL INSTALLATIONS SHALL MEET THE STANDARDS OF THE LOCAL AHJ & HEALTH DEPARTMENT.
- CONTRACTOR SHALL CONSULT WITH ALL EQUIPMENT SUPPLIERS FOR ANY ACCESSORIES NECESSARY TO ACHIEVE A COMPLETE KITCHEN INSTALLATION.
- NO COMBUSTIBLE MATERIAL SHALL BE USED IN MECHANICAL ROOMS OR IN CEILING SPACES WHERE USED AS RETURN AIR PLENUMS.
- IF APPLICABLE TO PROJECT, WATER METER SHALL BE LOCATED WITHIN LEASED PREMISES PROVIDED BY LANDLORD CONTRACTOR AT TENANT'S EXPENSE. INSTALL METER IN AN EASILY ACCESSIBLE LOCATION.
- SUBMIT SHOP DRAWINGS/SUBMITTALS ON ALL EQUIPMENT & OBTAIN APPROVAL PRIOR TO ORDERING & INSTALLATION OF WORK.
- CONTRACTOR SHALL KEEP & MAINTAIN AS-BUILT DRAWINGS ON JOB SITE AT ALL TIMES & DELIVER A SET OF UP TO DATE AS-BUILTS TO THE ENGINEER & OWNER AT THE COMPLETION OF THE PROJECT.
- DRAWINGS ARE DIAGRAMMATIC ONLY AND REPRESENT THE GENERAL SCOPE OF WORK NOT INTENDED TO SHOW EVERY MINOR DETAIL. CONTRACTOR IS RESPONSIBLE TO REVIEW GENERAL NOTES, SPECIFICATIONS, PLANS, LANDLORD DESIGN AND CONSTRUCTION CRITERIA DOCUMENTATION FOR ADDITIONAL REQUIREMENTS THAT MAY NOT BE SPECIFICALLY CALLED OUT IN THIS PORTION OF THE CONSTRUCTION DOCUMENTS. CONTRACTOR SHALL FURNISH & INSTALL ALL ITEMS AS REQ'D FOR A COMPLETE ACCEPTABLE WORKING INSTALLATION. DO NOT SCALE DRAWING FOR THE EXACT LOCATION OF FIXTURES, PIPING, EQUIPMENT, ETC. NOTIFY ARCHITECT OR ENGINEER OF ANY CONFLICTS OR DISCREPANCIES PRIOR TO SUBMISSION OF BID.

GENERAL PLUMBING NOTES (CONT.)

36. TESTING:
- DRAINAGE & VENT AIR TEST:** AN AIR TEST SHALL BE MADE BY FORCING AIR INTO THE SYSTEM UNTIL THERE IS A UNIFORM GAUGE PRESSURE OF 5 PIG OR SUFFICIENT TO BALANCE A 10" COLUMN OF MERCURY. THIS PRESSURE SHALL BE HELD FOR A PERIOD OF 15 MINUTES.
- GRAVITY SEWER TEST:** TEST SHALL CONSIST OF PLUGGING THE END OF THE PROJECT RELATED SEWER AT THE POINT OF CONNECTION WITH THE CITY SEWER SEWER, COMPLETELY FILLING THE SYSTEM WITH WATER FROM THE LOWEST TO THE HIGHEST POINT IN THE SYSTEM & MAINTAINING SUCH PRESSURE FOR AT LEAST 15 MINUTES.
- WATER SUPPLY SYSTEM:** UPON COMPLETION OF A SECTION OF OR AN ENTIRE WATER SUPPLY SYSTEM, THE SYSTEM, OR PORTION COMPLETED, SHALL BE TEST & PROVED WATER TIGHT UNDER A WATER PRESSURE NOT LESS THAN THE WORKING PRESSURE OF THE SYSTEM. THE WATER UTILIZED FOR THIS TEST SHALL BE OF A POTABLE SOURCE OF SUPPLY. IN NEW CONSTRUCTION, STERILIZE WATER LINES WITH A MIXTURE OF 2 LB. OF CHLORINATED LIME TO EACH 1000 GALLONS OF WATER. RETAIN THE MIXTURE IN PIPES FOR 24 HOURS & FLUSH THOROUGHLY WITH POTABLE WATER BEFORE PLACING IN SERVICE. REPAIR DEFECTS DISCLOSED BY ABOVE TEST. THE COMPLETE SYSTEM SHALL BE GIVEN A FULL OPERATION TEST BEFORE PLACING IN SERVICE.

PLUMBING SYMBOL LEGEND

SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
————	SANITARY LINE	FD	FLUSH CLEAN OUT
- - - - -	VENT LINE	RD	FLOOR DRAIN
— SD —	STORM DRAIN LINE	RD-1	ROOF DRAIN
— CD —	SAFEWASTE LINE	CO	PVC ROOF DRAIN (BODY AND DOME)
————	CONDENSATE LINE	WCO	CLEAN OUT
————	COLD WATER LINE	COOG	WALL CLEANOUT
————	HOT WATER LINE	COOG	CLEANOUT ON GRADE
————	HOT WATER RETURN	FLP	FLOOR PENETRATION
— G —	GAS LINE	ACH	AIR CHAMBER
—+—	GATE VALVE	VTR	VENT THRU ROOF
—+—	BACKFLOW PREVENTER	RWL	RAIN WATER LEADER
		HB	HOSE BIBB W/VB

- CONTRACTOR TO VERIFY MOUNTING HEIGHT OF ALL FIXTURES WITH INTERIOR DESIGNER & ARCHITECT PRIOR TO DEVICE INSTALLATION. REFER TO FLOOR PLAN FOR ADDITIONAL SPECIFICATIONS.
- SOME SYMBOLS SHOWN ON THIS LEGEND MAY NOT PERTAIN TO THIS PROJECT.

SHOP DRAWING REQUIREMENTS

- CONTRACTOR SHALL SUBMIT SIX (6) COPIES OF COMPLETED SHOP DRAWINGS & EQUIPMENT SUBMITTALS, TOGETHER AT ONE TIME & MUST COME THROUGH THE ARCHITECT. ALL SUBMITTALS SHALL BE MADE WITHIN THIRTY (30) DAYS OF NOTICE TO PROCEED.
- ALL SUBMITTALS MUST CLEARLY INDICATE EXACTLY WHAT ITEMS ARE BEING PROPOSED FOR USE. IF NOT, THE SUBMITTAL SHALL BE REJECTED.
- SUBSTITUTIONS SHALL BE LIMITED TO PRODUCT EQUIVALENTS & SHALL BE REVIEWED & ACCEPTED BY THE ENGINEER, ARCHITECT, & OWNER (10) DAYS PRIOR TO BID DATE.
- THE CONTRACTOR ASSUMES ALL DESIGN RESPONSIBILITY & ALL FINANCIAL RISKS FOR PROCEEDING PRIOR TO SHOP DRAWINGS PROCESSING AND ON ANY ITEM OR WORK THAT IS AT VARIANCE TO THE CONSTRUCTION DOCUMENTS.
- SHOP DRAWINGS AND SUBMITTALS FOR EACH ITEM SHALL BE REVIEWED NO MORE THAN TWICE. A THIRD SUBMITTAL ON AN ITEM MUST BE ACCOMPANIED BY A PURCHASE ORDER FROM THE CONTRACTOR OR IT SHALL BE REJECTED.
- CIRCUMSTANCES NECESSITATING A REVISION TO THE PERMITTED DOCUMENTS NOT PROCESSED PRIOR TO INSTALLATION MAY NOT BE ACCEPTED. IF ACCEPTED, IT MUST BE LEGIBLE, ACCURATE, & ACCOMPANIED BY A PURCHASE ORDER FROM THE CONTRACTOR. THE REVISION SHALL BE CHARGED TO THE CONTRACTOR & DELIVERED TO HIM ON A COD BASIS.
- SUBSTITUTIONS FROM THE BASE DESIGN OR VARIATIONS TO THE PERMITTED CONTRACT DOCUMENTS WHETHER RESULTING FROM PROCESSED SHOP DRAWINGS OR NOT, THAT RESULT IN REQUIREMENTS IN LETTERS OF AUTHORIZATION AND/OR PERMIT CONTRACT DOCUMENT CHANGES MANDATED BY THE AUTHORITY HAVING JURISDICTION WILL NOT BE MADE BY THIS OFFICE UNLESS ACCOMPANIED BY A PURCHASE ORDER FROM THE CONTRACTOR, AND RELEASED ON A COD BASIS.

PLUMBING FIXTURE SCHEDULE

MARK	DESCRIPTION	CONNECTIONS				REMARKS
		WASTE	COLD WATER	HOT WATER	FLOW RATES	
WC	WATER CLOSET: FLOOR MOUNTED, PRESSURE ASSISTED TANK FLUSH, VITREOUS CHINA, ADA COMPLIANT.	3"	1/2"	—	1.6 GPF	AMERICAN STANDARD CADET 3 SERIES RIGHT HEIGHT ELONGATED ONE-PIECE LUXURY PERFORMANCE TOILET WITH SEAT.
LAV	LAVATORY: WALL MOUNTED, VITREOUS CHINA, ADA COMPLIANT	1-1/2"	3/8"	3/8"	0.5 GPM	AMERICAN STANDARD LUCERNE SERIES WITH AMERICAN STANDARD MONTERREY GOOSENECK FAUCET. PROVIDE 0.5 GPM AERATOR ON FAUCET IF NOT FACTORY INSTALLED.
EWC	ELECTRIC DRINKING FOUNTAIN: WALL MOUNTED, STAINLESS STEEL, ADA COMPLIANT	1-1/4"	1/4"	—	—	ELKAY VRCBS SELF-CONTAINED, ELECTRIC REFRIGERATED, VANDAL RESISTANT WATER COOLER.
MSK	MOP SERVICE BASIN	3"	1/2"	1/2"		ZURN Z1996-24 MOLDED HIGH DENSITY COMPOSITE BASIN (DIMENSIONS 24x24x10) WITH PVC DRAIN BODY & STAINLESS STEEL STRAINER. ZURN Z1996-SF CHROME PLATED SERVICE FAUCET.
SK, SK-1, SK-2 AND SK-3	SINK	1-1/2"	1/2"	1/2"	1.5 GPM	BY OWNER/ ARCHITECT
SPS	SHAMPOO STATION	1-1/2"	3/8"	3/8"		BY OWNER/ ARCHITECT SHALL BE INSTALLED AS PER MANUFACTURER SPECIFICATIONS.
NS	NAILS STATION	NOT USED	1"	1/2"	1/8"	BY OWNER/ ARCHITECT SHALL BE INSTALLED AS PER MANUFACTURER SPECIFICATIONS.
BSK	BARBER SINK	1-1/2"	1/2"	1/2"		BY OWNER/ ARCHITECT

- NOTES:
- ALL FIXTURES & FAUCETS SHALL COMPLY WITH THE FBC WATER CONSERVATION REQUIREMENTS-(TABLE 604.4).
 - ALL WALL HUNG PLUMBING FIXTURES SHALL COMPLY WITH FBC SECTION 2318.1.15 & 2517.5.1.
 - PER ADA COMPLIANCE, INSULATE ALL EXPOSED HANDICAP LAVATORY DRAIN PIPING AND HOT & COLD STOP AND SUPPLIES. COVERS SHALL BE SOFT, REMOVABLE, AND UPC APPROVED. PROVIDE PLUMBEREX HANDY-SHIELD OR PRO-SERIES.

DRAIN & CLEANOUT SCHEDULE

DESIGNATION	DESCRIPTION	DRAIN	CW	REMARKS
FD	FLOOR DRAIN	3"	1/2"	ZURN Z415BZ-P
HD	HUB DRAIN	2"	—	ZURN Z41SE
CO	WALL CLEANOUT	MATCH PIPE	—	ZURN Z1446-VP

SHOCK ARRESTOR SCHEDULE


P.D.I. DESIGNATION	MAKE/MODEL	FIXTURE UNITS	CONNECTION
A	SIoux CHIEF 652-A	1-11	1/2"
B	SIoux CHIEF 653-B	12-32	3/4"
C	SIoux CHIEF 654-C	33-60	1"

SIoux CHIEF SHOCK ARRESTORS ARE APPROVED FOR INSTALLATION WITH NO ACCESS DOOR REQUIRED. CONFORMS TO ANSI/ASSE 1010 STANDARDS.

SLOPE OF HORIZONTAL DRAINAGE PIPE

SIZE (inches)	MINIMUM SLOPE (inch per foot)
2-1/2 or less	1/4
3 to 6	1/8
8 or larger	1/16


TABLE 704.1 OF THE FLORIDA PLUMBING CODE

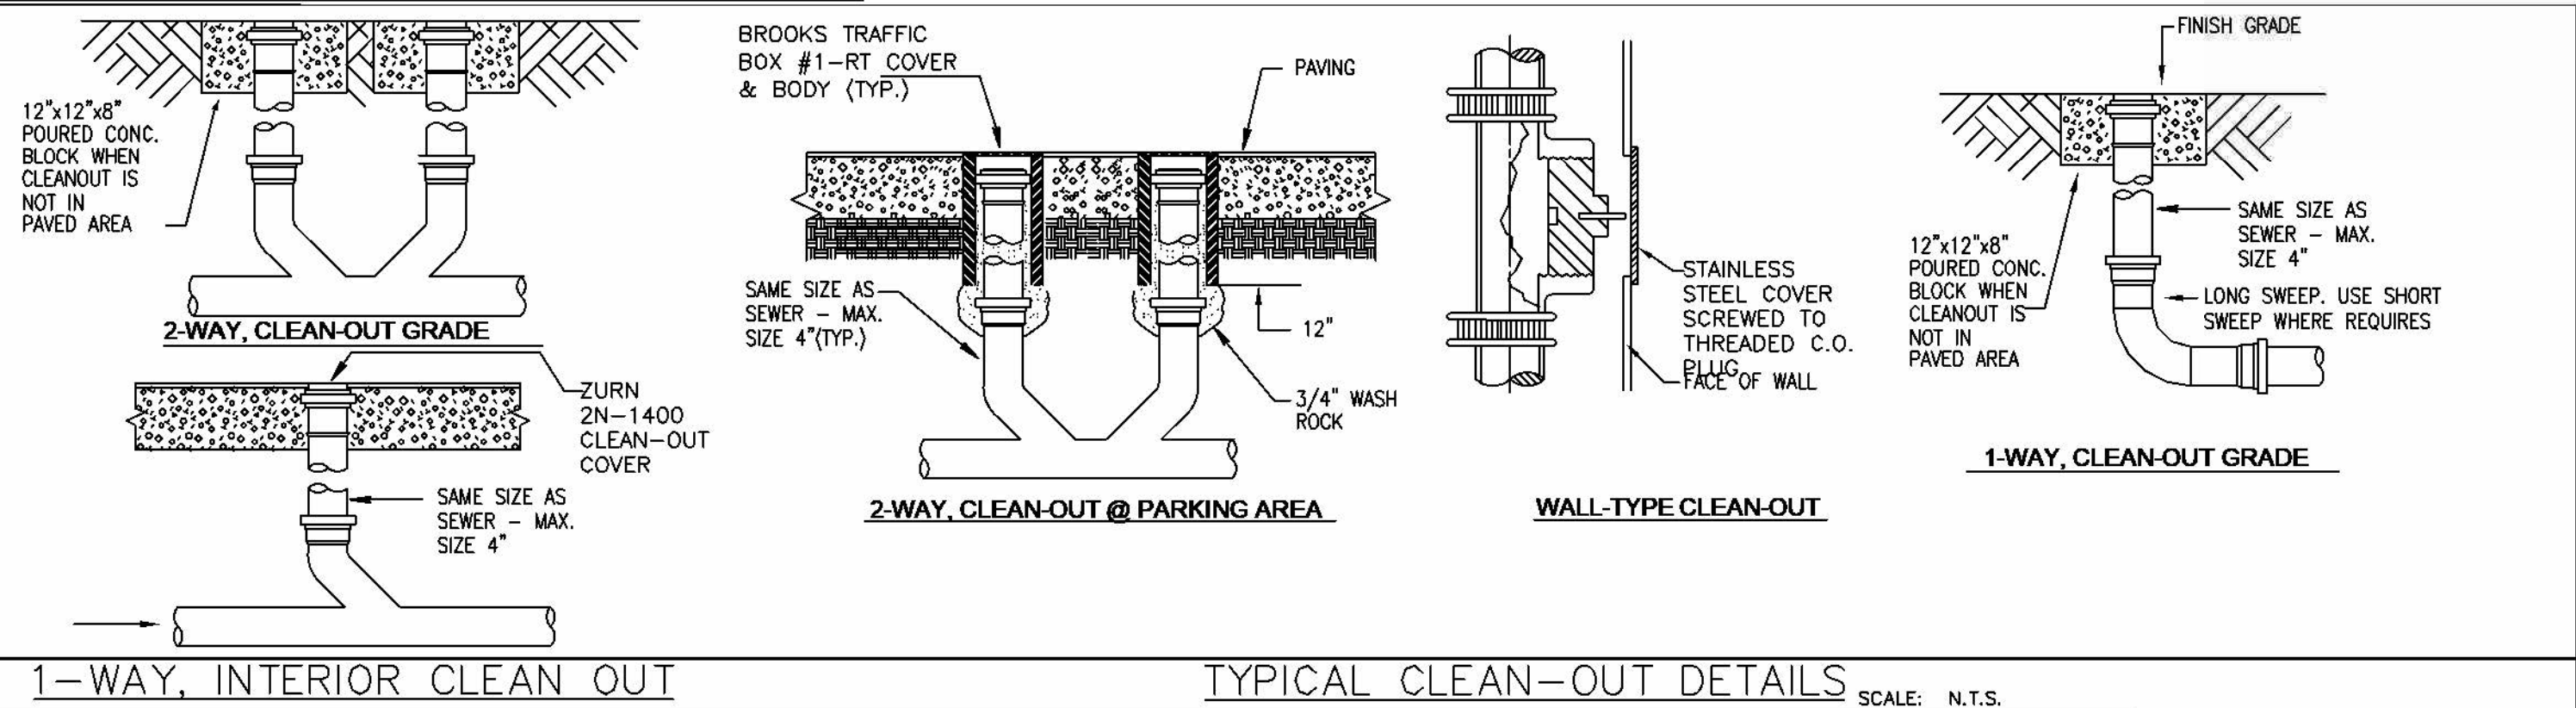

1-WAY, INTERIOR CLEAN OUT


TYPICAL CLEAN-OUT DETAILS

SCALE: N.T.S.

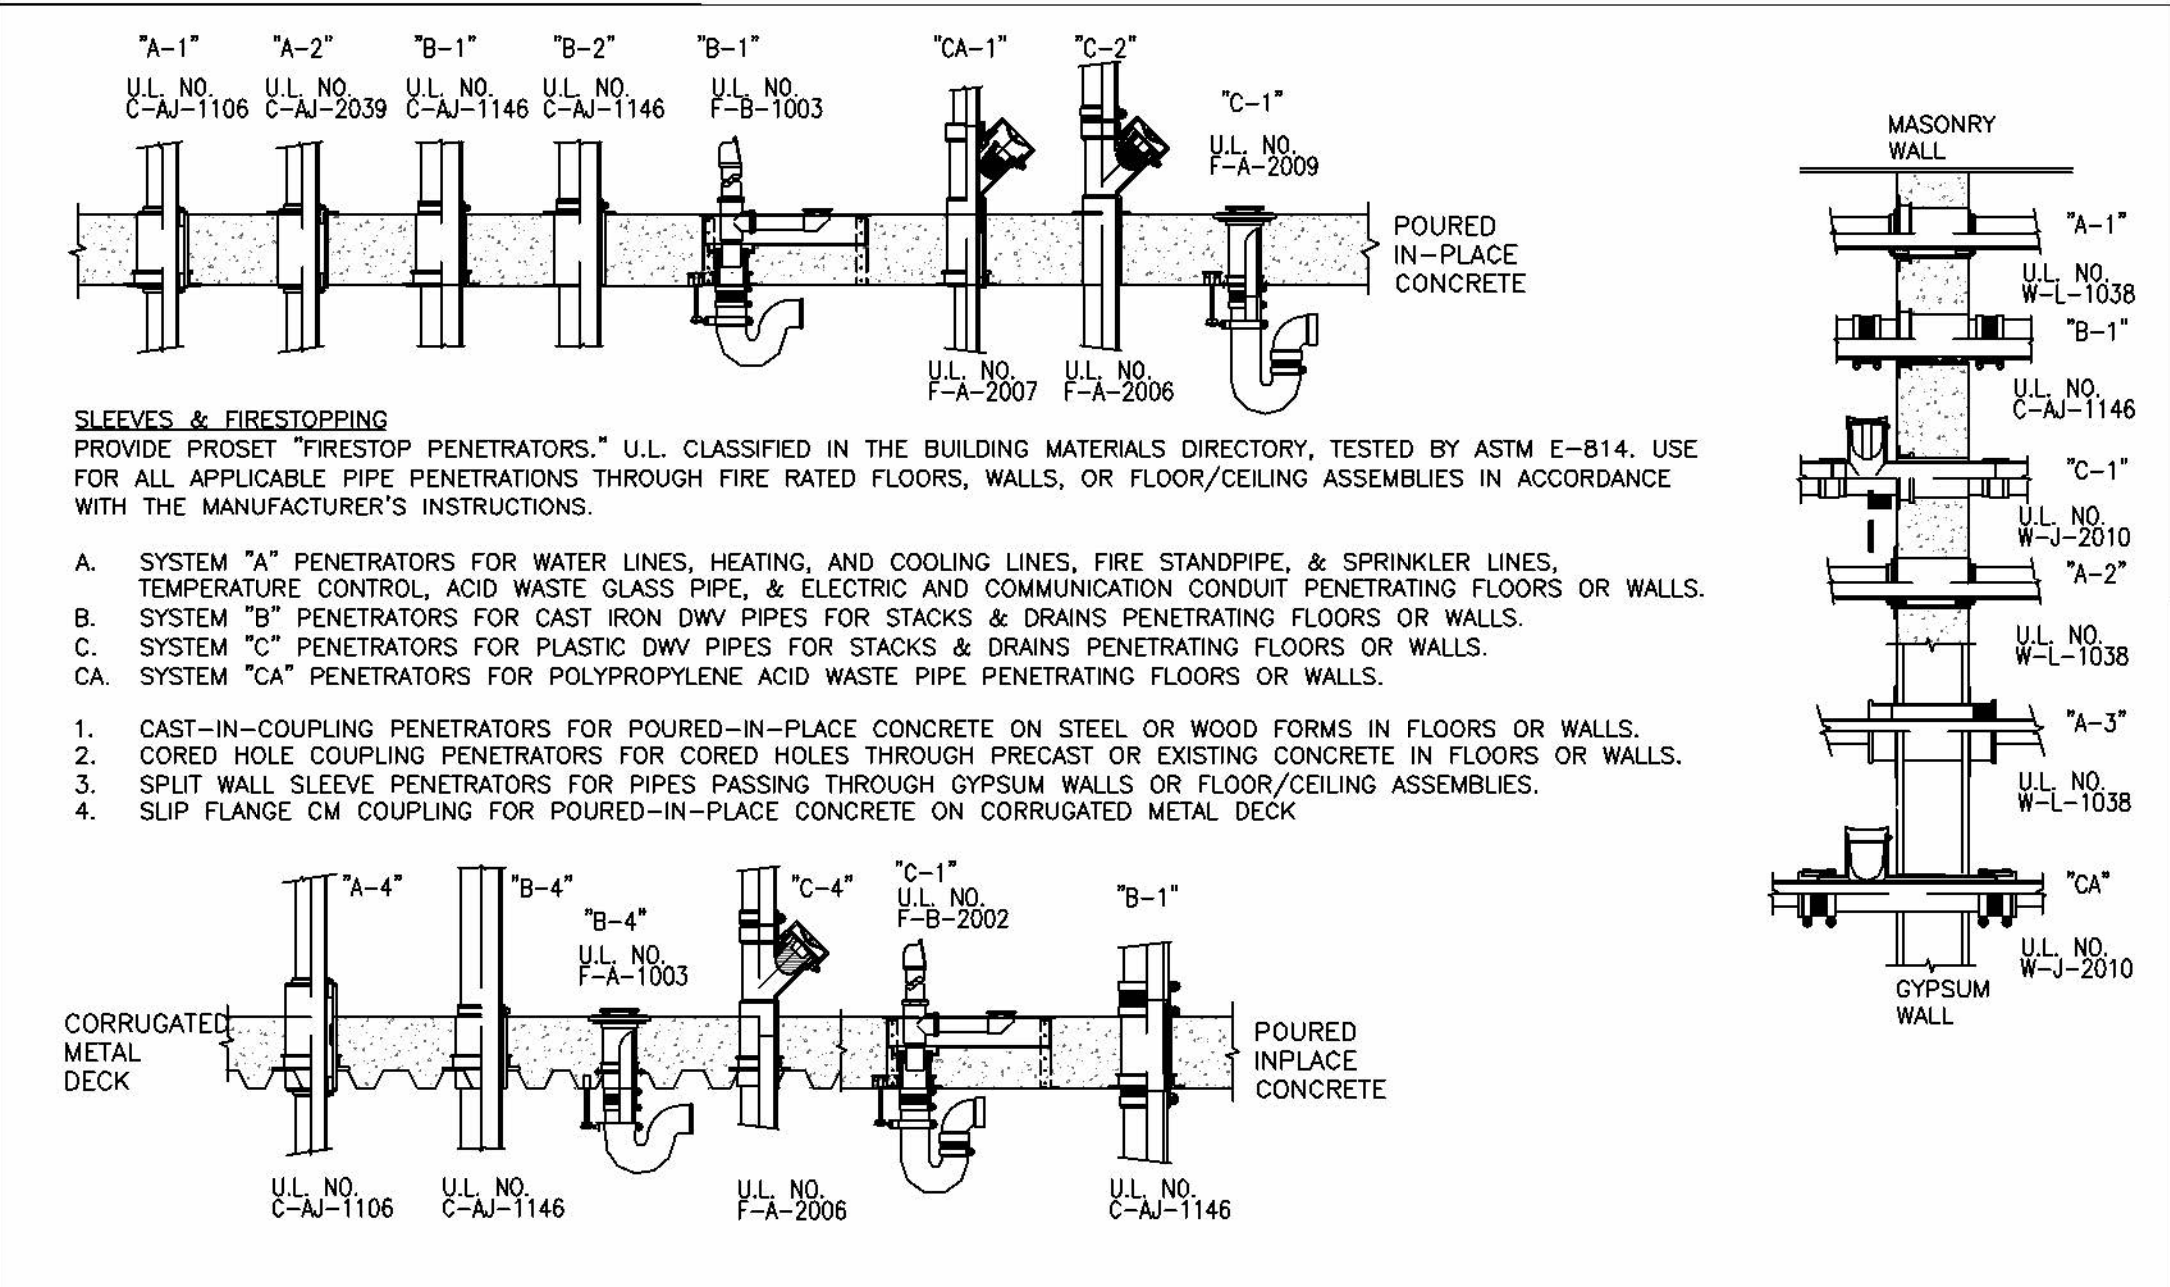

FIRE STOPPING PENETRATION DETAIL

SCALE: N.T.S.

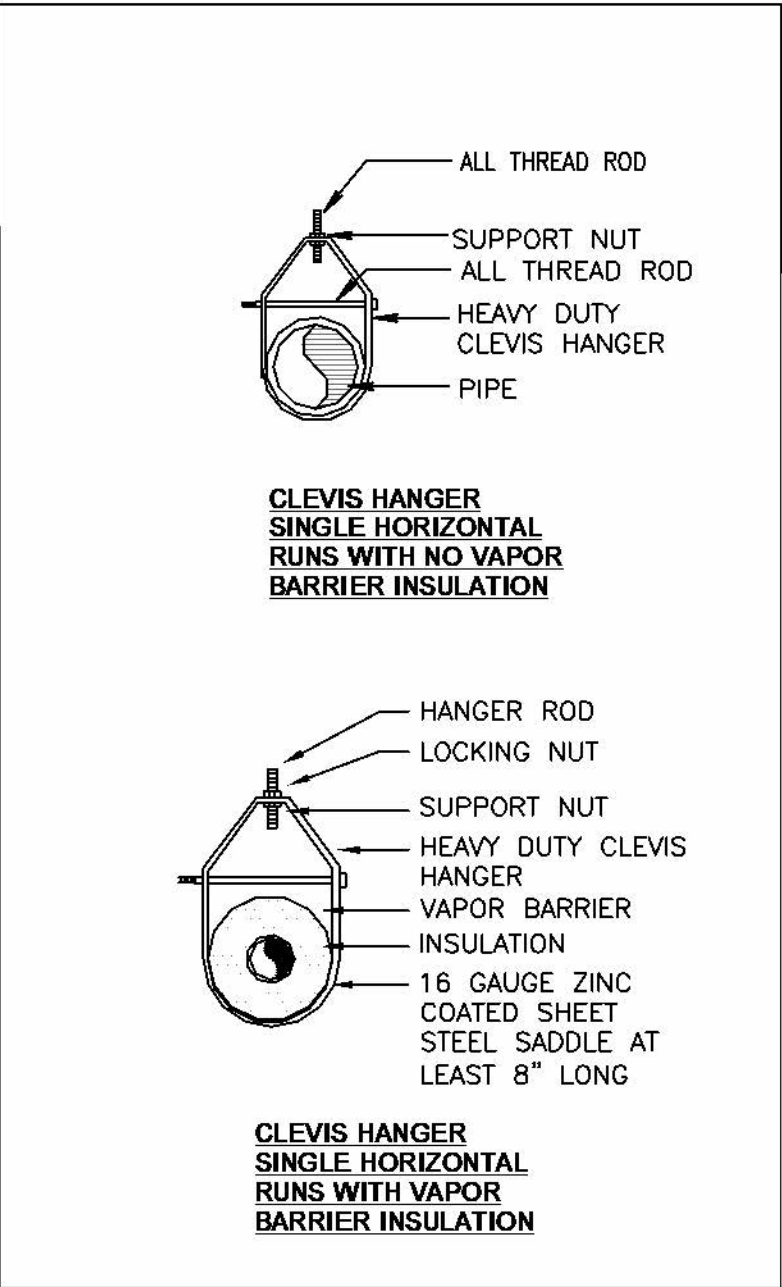


PIPE SUPPORT DETAIL

SCALE: N.T.S.

SEAL

PLUMBING SCOPE OF WORK

TENENT BUILDOUT - HAIR SALON

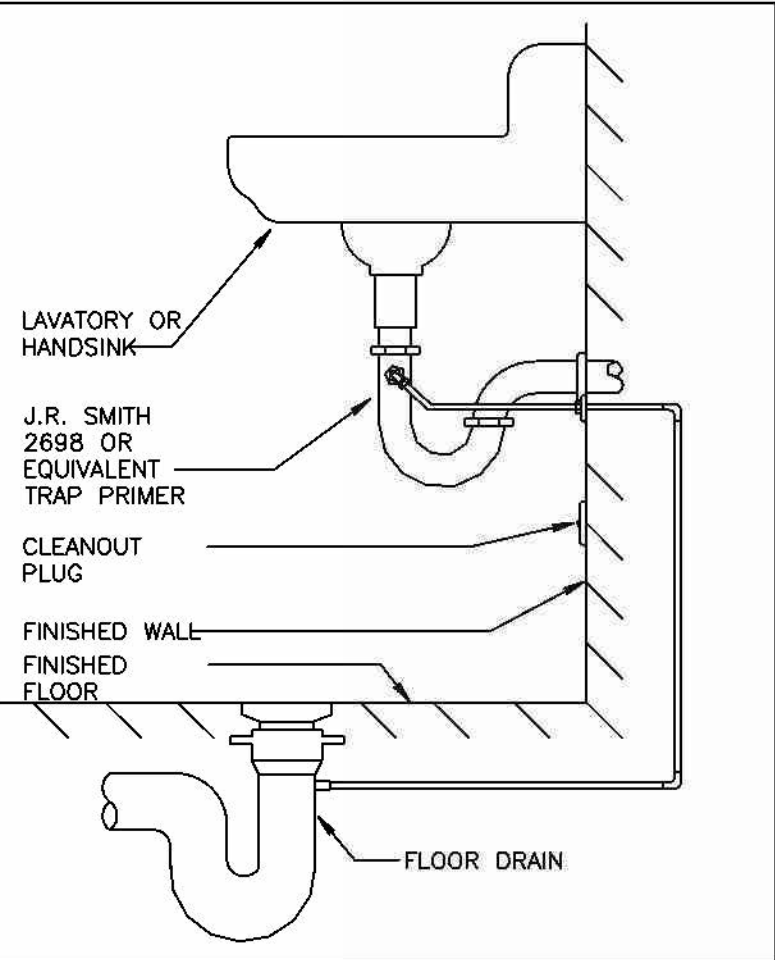

TRAP PRIMER DETAIL

SCALE: NTS

ISSUED FOR: *** FOR PERMIT ***

REVISIONS

NO.	DESCRIPTION	DATE

Project number: 22-2076

Project Issue Date: 04/01/2022

Project Status: FOR PERMIT

PLUMBING NOTES AND SCHEDULES

SHEET: 1 of 18

SHEET NUMBER

P-0

A. PLUMBING

4/17/2022 10:30 PM
K:\Projects\Projects\22-2076 - 0053 Metro Parkway #014 Hagers-Har-Sabin CAD FILES\Sabin_MemoPly.rvt

MAXIMUM ALLOWABLE WATER USAGE FOR PLUMBING FIXTURES

FIXTURE	VOLUME (GALLONS)	PER UNITS	SEE NOTE
WATER CLOSETS			
FLUSHMETER TANK OR CLOSE-COUPLED 2-PIECE GRAVITY-FLUSH TYPE	1.6	FLUSH	5
ONE-PIECE	1.6	FLUSH	
NON-RESIDENTIAL APPLICATION	3.5	FLUSH	
URINAL	1.0	FLUSH	
FAUCETS			
RESIDENTIAL SINK OR LAVATORY	2.2	MINUTE	5
PUBLIC - NON-METERING TYPE	0.5	MINUTE	
PUBLIC - METERING TYPE	0.25	CYCLE	2
SHOWER HEADS	2.5	MINUTE	3 4

1.0 GALLONS = 3.7854 LITERS
1.0 GALLONS PER MINUTE = 0.0631 LITERS PER SECOND


- NOTES
- MAXIMUM ALLOWABLE WATER USAGE FOR PLUMBING FIXTURES AND FIXTURE FITTING NOT LISTED IN THIS TABLE SHALL CONFORM TO THE APPLICABLE ANSI STANDARD LISTED IN TABLE 405. BLOWOUT FIXTURES, PANELWEAR, CLINIC SINKS AND SERVICE SINKS SHALL BE EXEMPTED FROM THESE LIMITATIONS.
 - LAVATORY FAUCETS SHALL BE OF THE METERING TYPE WHEN LOCATED IN THE FOLLOWING PUBLIC RESTROOMS: A. ALL OCCUPANCIES IN RESTROOMS WHICH HAVE SIX OR MORE LAVATORIES
B. SCHOOL OCCUPANCIES IN STUDENT-USE RESTROOMS
C. ASSEMBLY OCCUPANCIES IN ALL CUSTOMER OR PUBLIC-USE RESTROOMS
 - SHOWERHEAD FLOW RATE AS TESTED AT 70 PSI (552 KPA) IN ACCORDANCE WITH ANSI STANDARD A112.18.1M.
 - SPECIAL PURPOSE SAFETY SHOWERS ARE EXEMPTED FROM MAXIMUM FLOW RATE LIMITATIONS.
 - AVERAGE WATER CONSUMPTION FOR LOW CONSUMPTION WATER CLOSETS OVER A RANGE OF TEST PRESSURES SHALL NOT EXCEED 1.6 GPF. THE CONSUMPTION SHALL NOT EXCEED 2.0 GPF AT ANY ONE TEST PRESSURE.
 - MEASURED AT 60 P.S.I.

PLUMBING FIXTURE SCHEDULE (LISTED MANUFACTURER OR APPROVED EQUAL)

MARK	FIXTURE	MANUFACTURER / MODEL	MATERIAL	ACCESSORIES	CW	HW	TRAP	SAN	NOTES
WC-1	WATER CLOSET (TANK)	ELONGATED WATER SAVER #K-3483 HIGHLINE	VITREOUS CHINA	SEAT : FRENCH CURVE OPEN FRONT #K-4050 - SUPPLY PIPE & 2 LUGS	1/2"	-	INTEGRAL	3"	1, 2
WC-2	WATER CLOSET (TANK)	ELONGATED WATER SAVER #K-3427 HIGHLINE	VITREOUS CHINA	SEAT : FRENCH CURVE OPEN FRONT #K-4053 - SUPPLY PIPE & 2 LUGS	1/2"	-	INTEGRAL	3"	1, 2
L-1	LAVATORY WALL-HUNG ADA-COMPLIANT	GREENWICH #K-2030	VITREOUS CHINA	FAUCET : FINESSE #K-7443-SA HANDLES: #K-13012 WRIST BLADE	1/2"	1/2"	1-1/2"	2"	1, 2, 3
L-2	LAVATORY COUNTERTOP	CAXTON #K-2210	VITREOUS CHINA	FAUCET : FINESSE #K-7443-SA HANDLES: #K-13012-5 WRIST BLADE	1/2"	1/2"	1-1/2"	2"	1, 2
UR-1	URINAL	BARDON WASHOUT DESIGN #K-4990-T	VITREOUS CHINA	VALVE : SLO AN ROYAL 108	3/4"	-	INTEGRAL	2"	1, 2
SK-1	SINK KITCHEN	TWO-BOWL, SELF-RIMMING ELKAY: EG3322	STAINLESS STEEL	FAUCET: ELKAY: LK02437BH ACCESS: PROFLO: PF1435SS	1/2"	1/2"	1-1/2"	2"	1, 2
SK-2	SINK HAND	SINGLE-BOWL, SELF-RIM ELKAY: LRAD1517	STAINLESS STEEL	FAUCET: PROFLO: PF1435SM	1/2"	1/2"	1-1/2"	2"	1, 2
MS-1	SERVICE BASIN MOP	PROFLO: PF2199B24	HIGH DENSITY COMPOSITE	FAUCET: PROFLO: PF1118 ACCESS: PROFLO: PF245 HANGER	1/2"	1/2"	3"	3"	1, 2
SH-1	SHOWER VALVE & FAUCET	MOEN: POSI TEMP VALVE	HIGH DENSITY COMPOSITE	FAUCET: MOEN: T5152 WI 3867 HAND SHOWER WI SLIDE BAR DRAIN: PROFLO: PF101PNC	1/2"	1/2"	1-1/2"	2"	1, 2
FCO	CLEANOUT (FLOOR)	ZURN B21400	DURA COATED CAST IRON BODY	-	-	-	-	PIPE SIZE	-
WCO	CLEANOUT (WALL)	ZURN B2-1441	NICKEL/BRASS	-	-	-	-	PIPE SIZE	-


ALL PLUMBING FIXTURES, COLORS, AND FINISHES TO BE SELECTED BY OWNER OR COORDINATED BY INTERIOR DESIGNER, OWNER, AND/OR ARCHITECT.

- NOTES
- FINAL FIXTURE COLOR SELECTION BY INTERIOR DESIGNER OR OWNER
 - TRAPS, FITTINGS, AND ACCESSORIES SHALL BE CHROME (NO PVC)
 - PROVIDE WITH FLOOR-MOUNT CONCEALED ARM CARRIER SUPPORT. SMITH, ZURN, OR APPROVED EQUAL

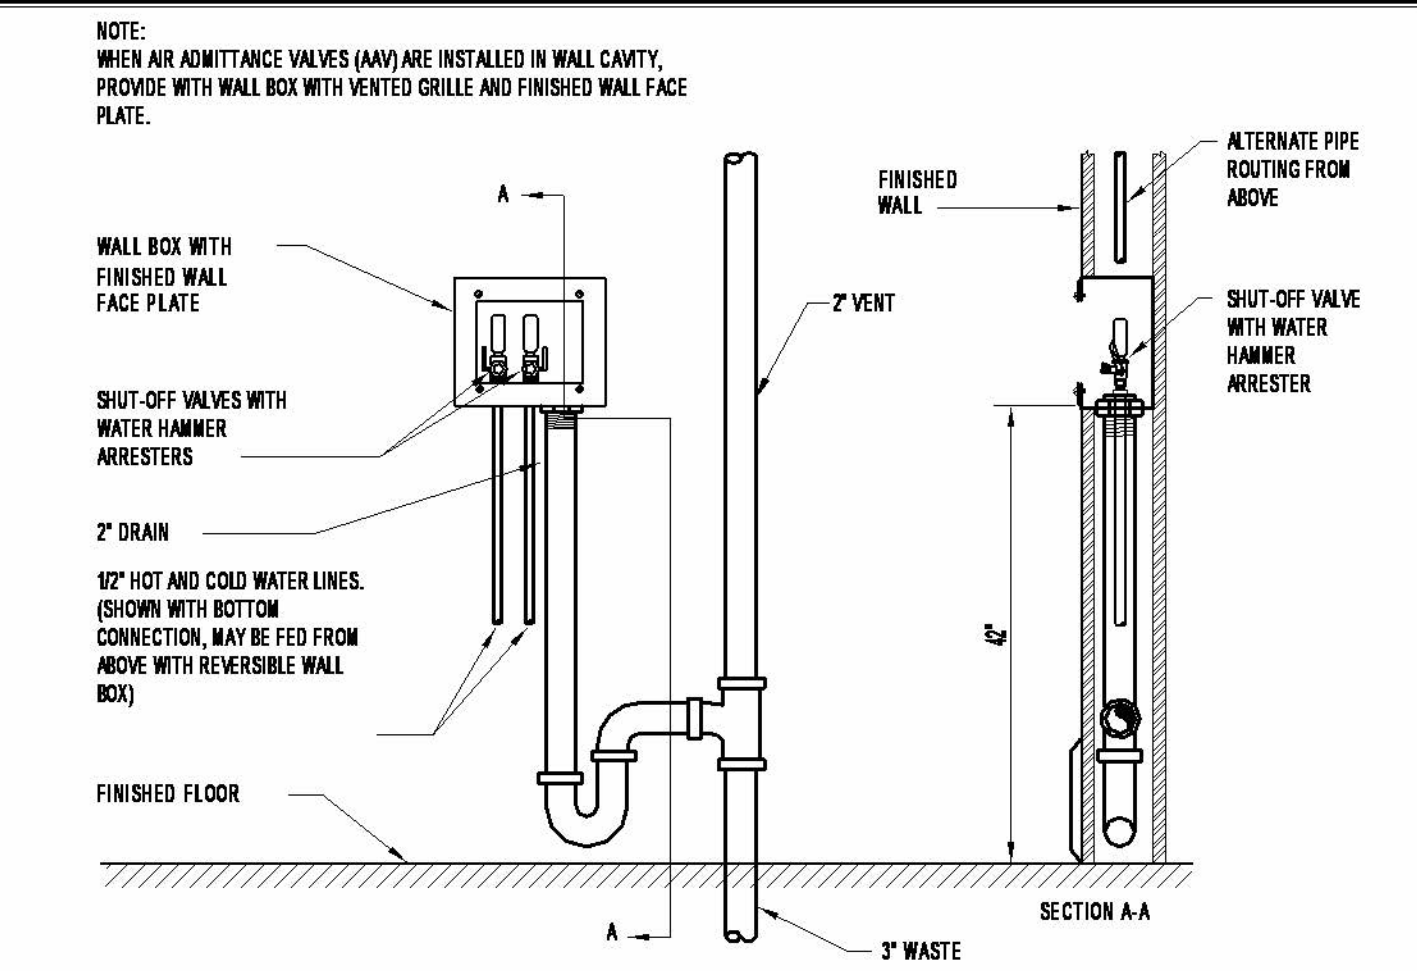


WASHING MACHINE CONNECTION DETAIL

NOT TO SCALE

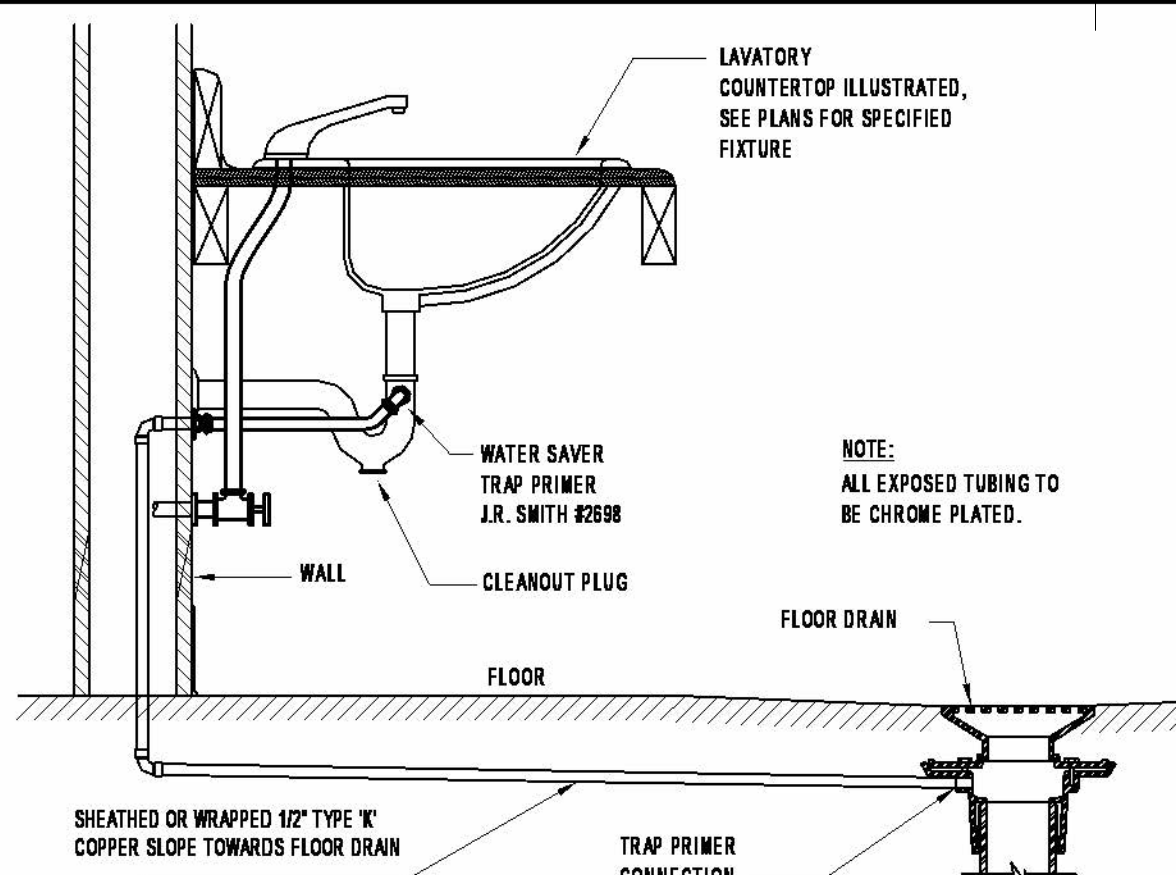


TRAP PRIMER PIPING DIAGRAM

NOT TO SCALE

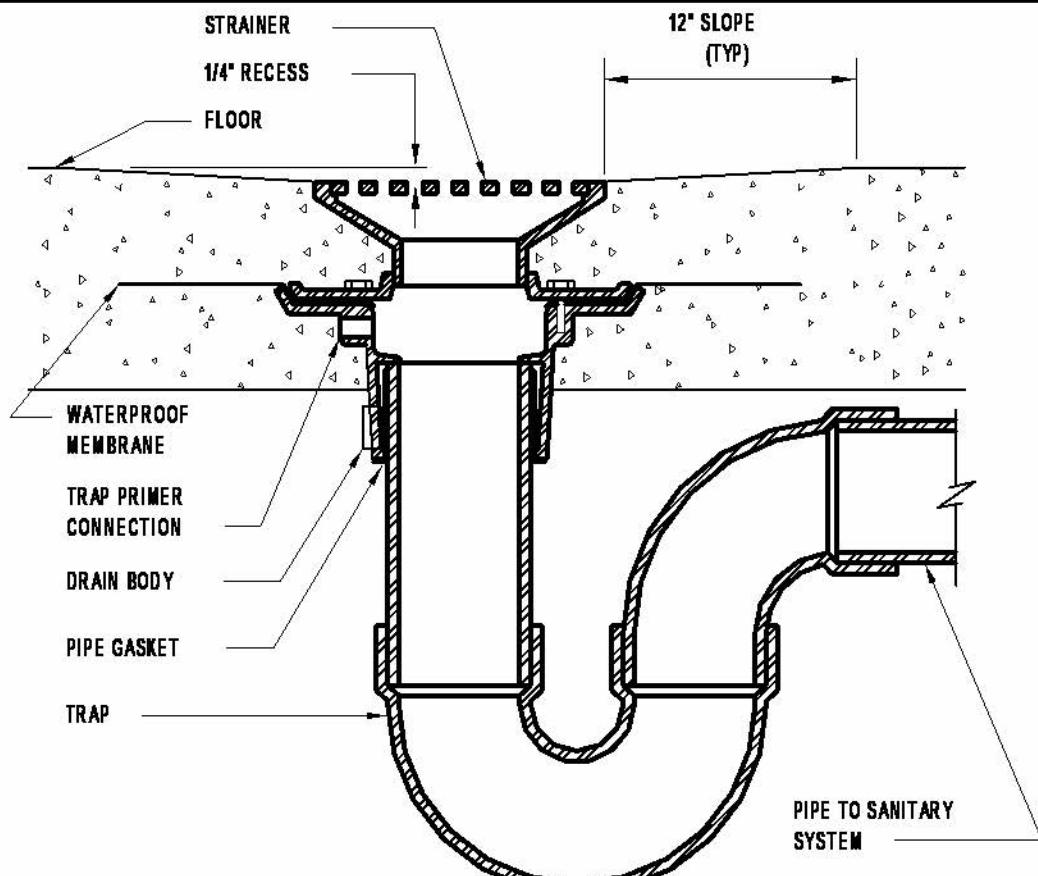


INTERIOR FLOOR DRAIN DIAGRAM

NOT TO SCALE

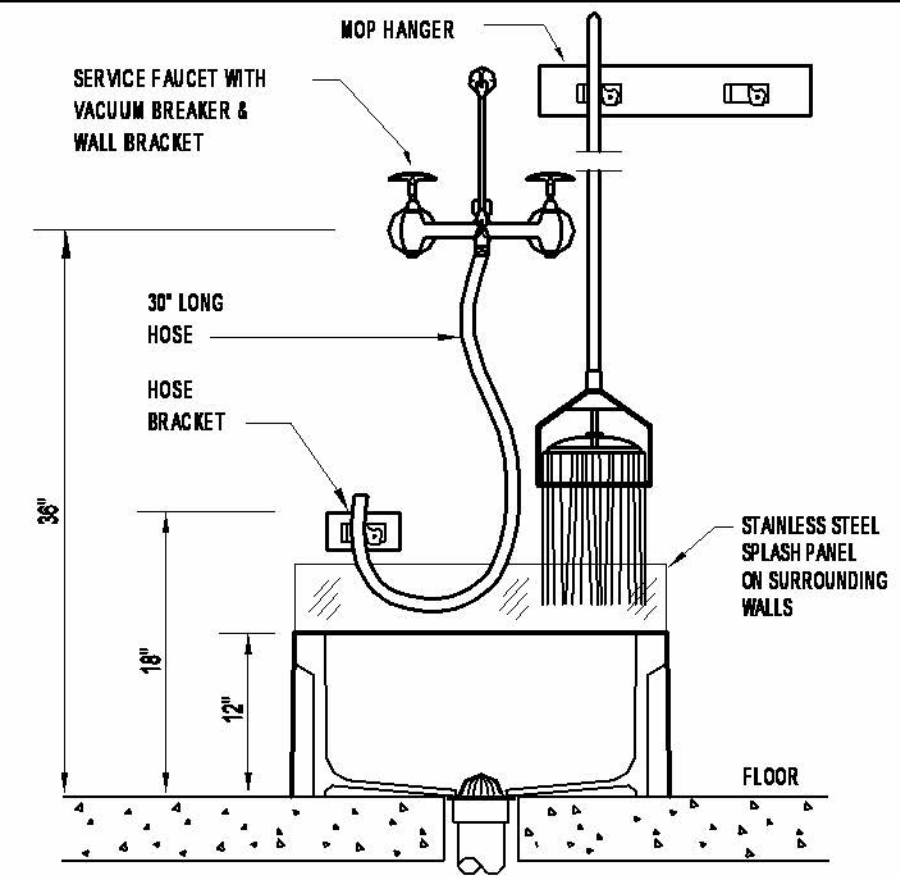

JANITOR MOP SINK DIAGRAM


NOT TO SCALE

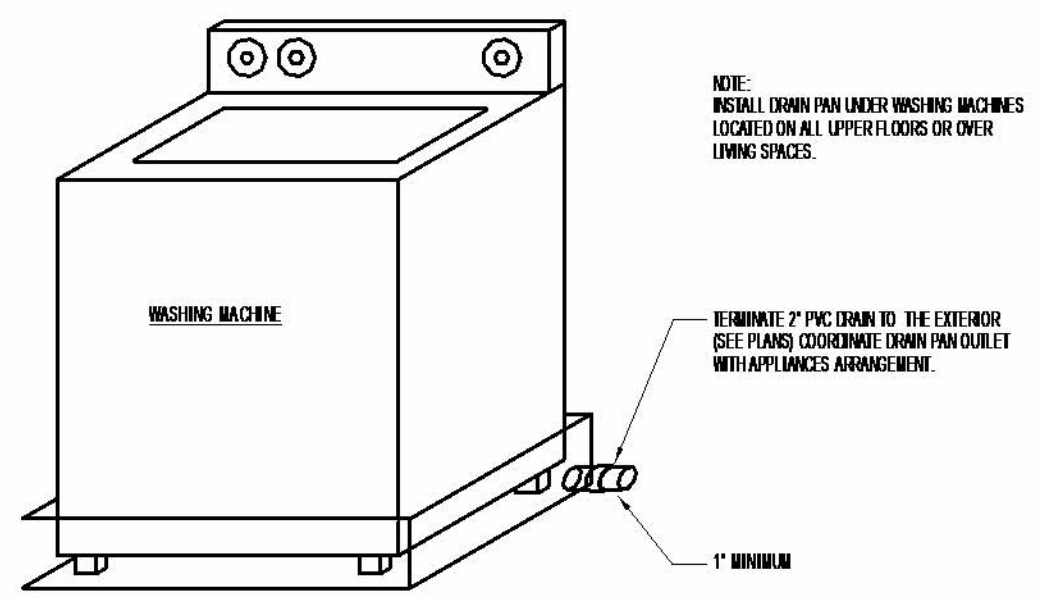

1000 IMPACT POLYETHYLENE WASHING MACHINE PAN BY PLASTIC COOKIES MODEL NUMBER WMP-81 WITH 1 INCH PVC ADAPTER KIT WITH GASKET AND LOCK RING, PART NUMBER WML-1, OR APPROVED EQUAL.
MINIMUM EXTERIOR WALL 18" x 24" INCHES
TOP DIMENSION: 24" x 30", BOTTOM DIMENSION: 27" x 26"
APPROVED PANEL MATERIAL MAY BE 24 GAUGE GALVANIZED SHEET METAL. PROVIDE WATER TIGHT CONSTRUCTION WITH SEALANT AT ALL JOINTS.
MINIMUM PAN DIMENSIONS SHALL EQUAL ABOVE LISTED DIMENSIONS.


WASHING MACHINE OVERFLOW DRAIN PAN DETAIL

NOT TO SCALE

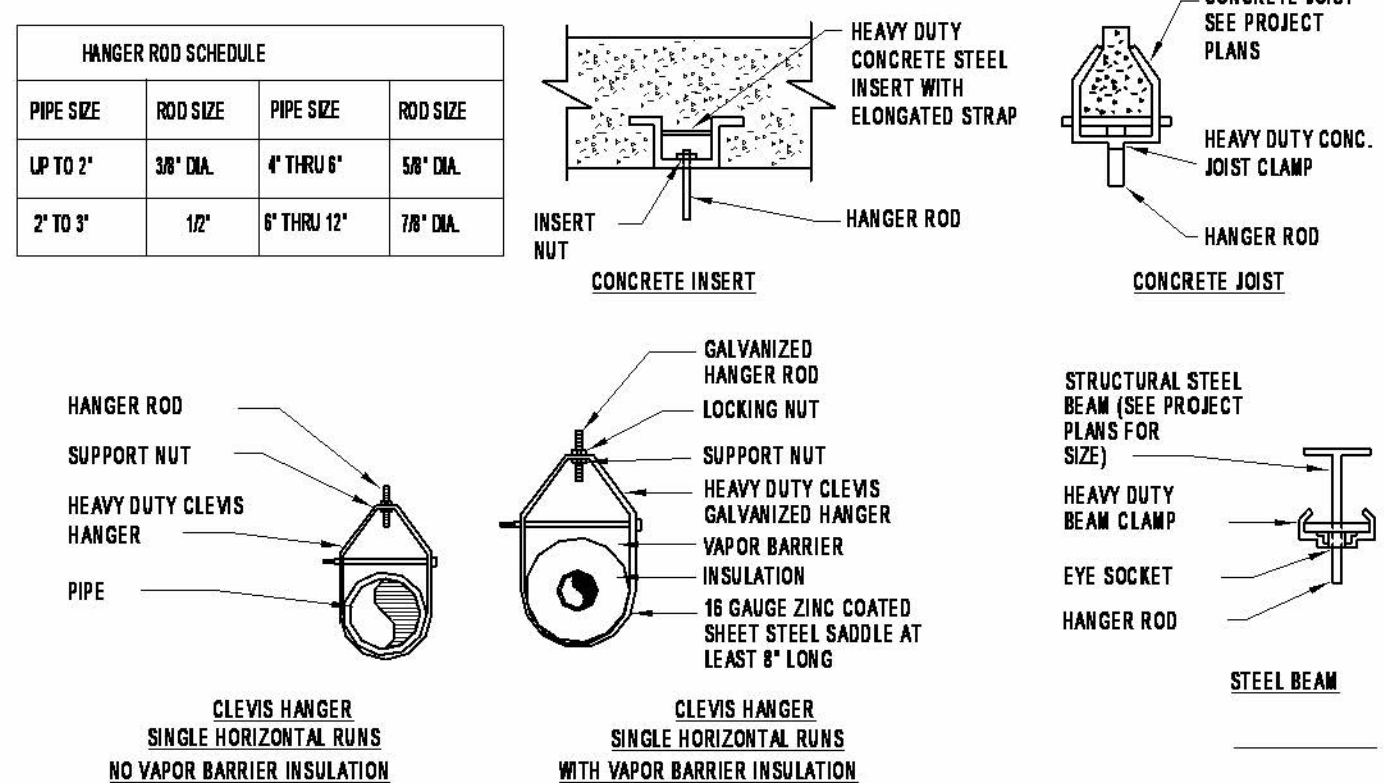


PIPE SUPPORT DIAGRAM

NOT TO SCALE

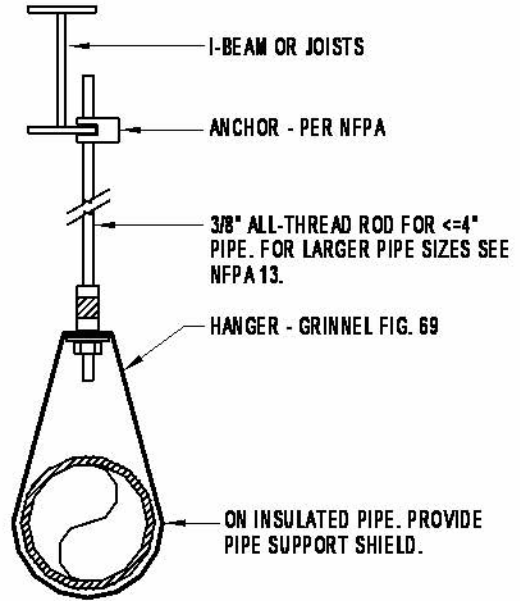


PIPE HANGER DIAGRAM

NOT TO SCALE

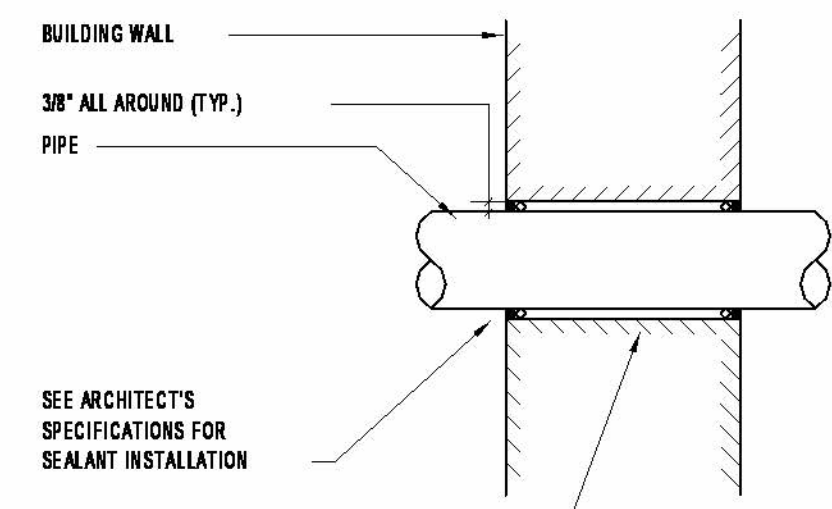


PIPE SLEEVE DIAGRAM

NOT TO SCALE

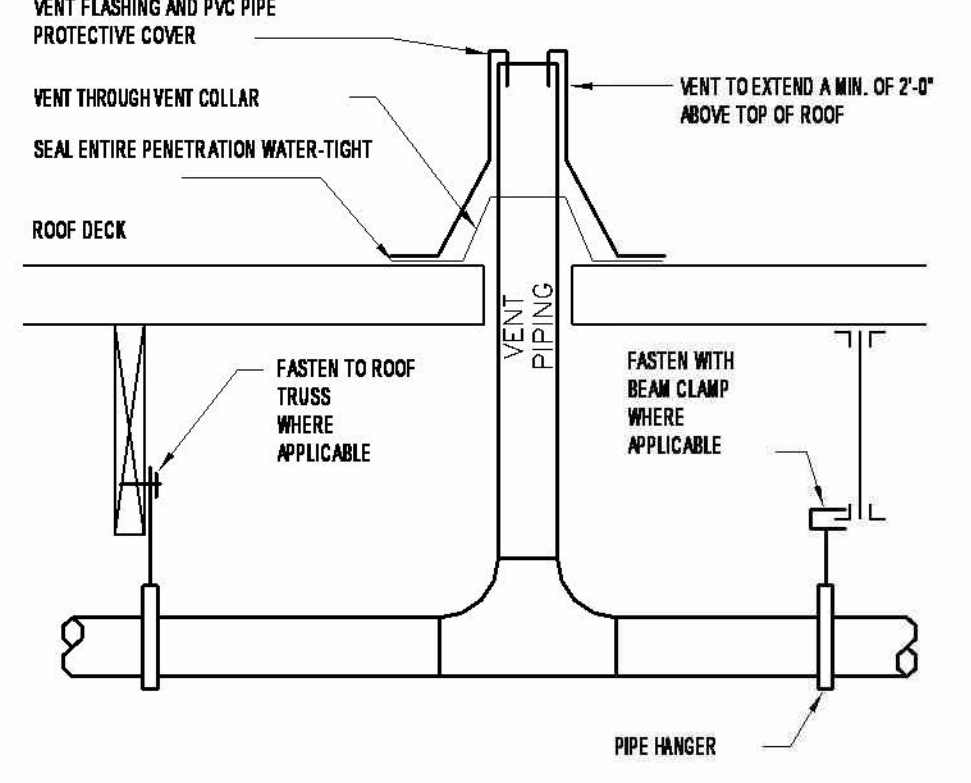


VENT THROUGH ROOF DIAGRAM

NOT TO SCALE

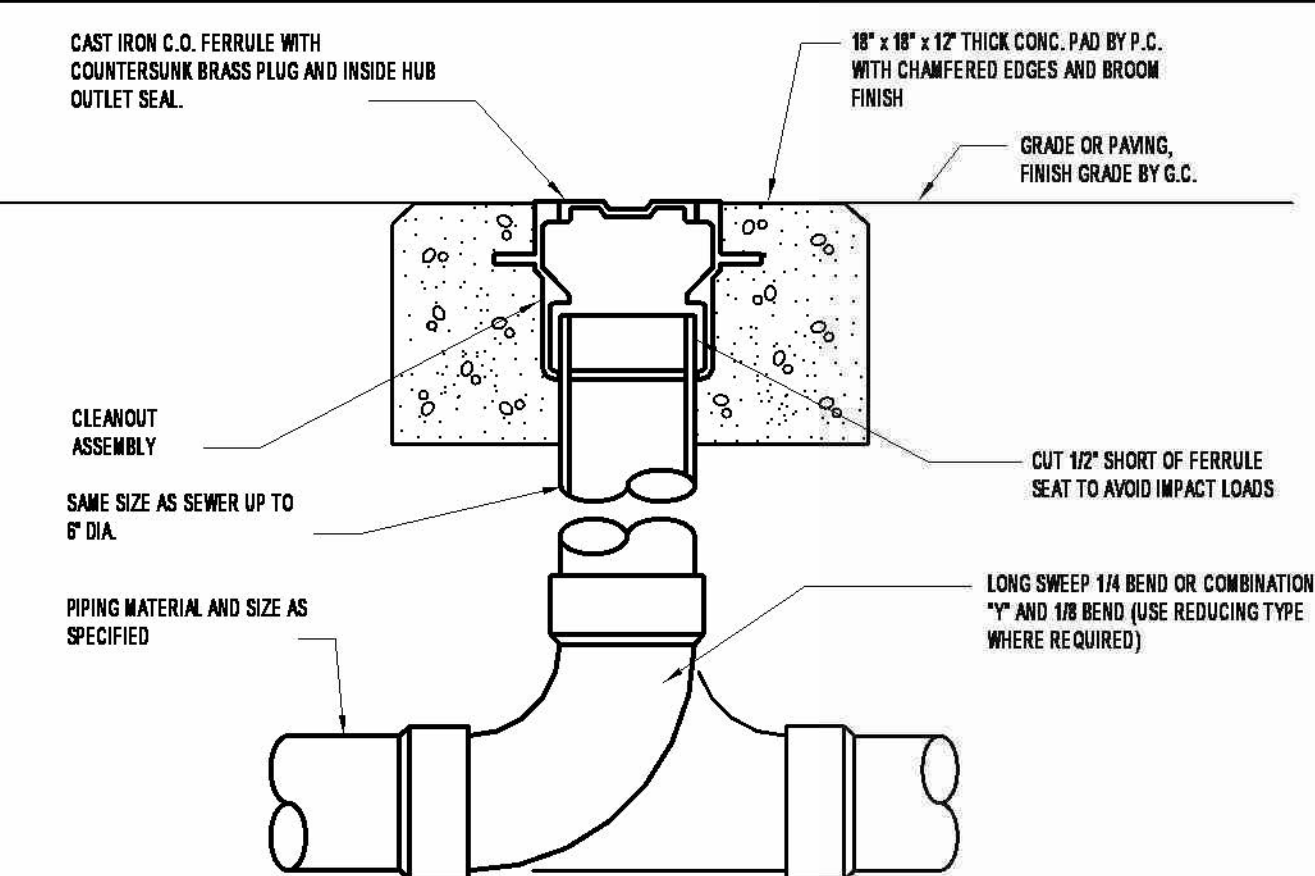

TYPICAL EXTERIOR CLEAN-OUT DIAGRAM

NOT TO SCALE

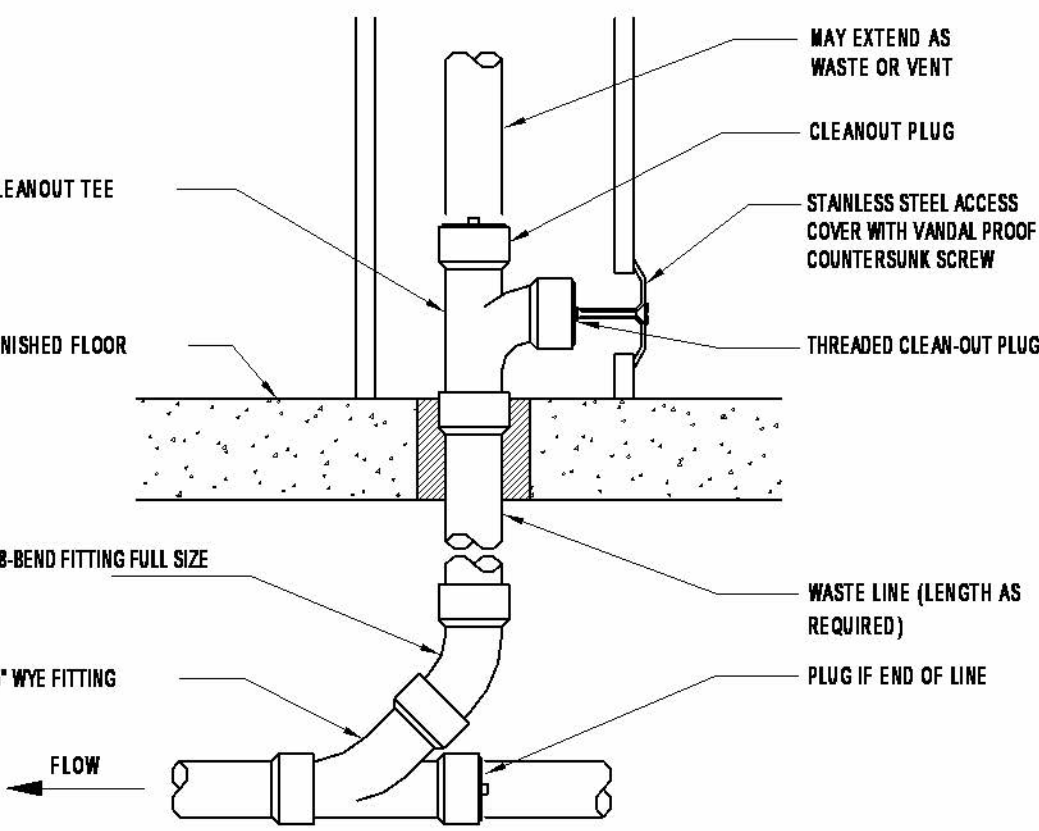

WALL CLEAN-OUT DIAGRAM

NOT TO SCALE

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS	DATE
NO.	DESCRIPTION

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT




PLUMBING NOTES AND DETAILS

SHEET: 2 of 18


SHEET NUMBER
P-0.1
A. PLUMBING

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.


Key Value	Keynote Text
PL21	RELOCATE EXISTING TOILET AS REQUIRED
PL22	RELOCATE EXISTING LAV AS REQUIRED
PL23	ALL SHAMPOO STATIONS TO HAVE TEMPERATURE REGULATING DEVICE, SEE DETAIL THIS SHEET
PL24	PER FBCP 405.1 WATER SUPPLY PROTECTION. THE SUPPLY LINES AND FITTINGS FOR EVERY PLUMBING FIXTURE SHALL BE INSTALLED SO AS TO PREVENT BACKFLOW.
PL25	WASHING MACHINE TO DISCHARGE INTO LINT FILTER, LINT FILTER TO DISCHARGE TO WMB, SEE DETAIL ABOVE

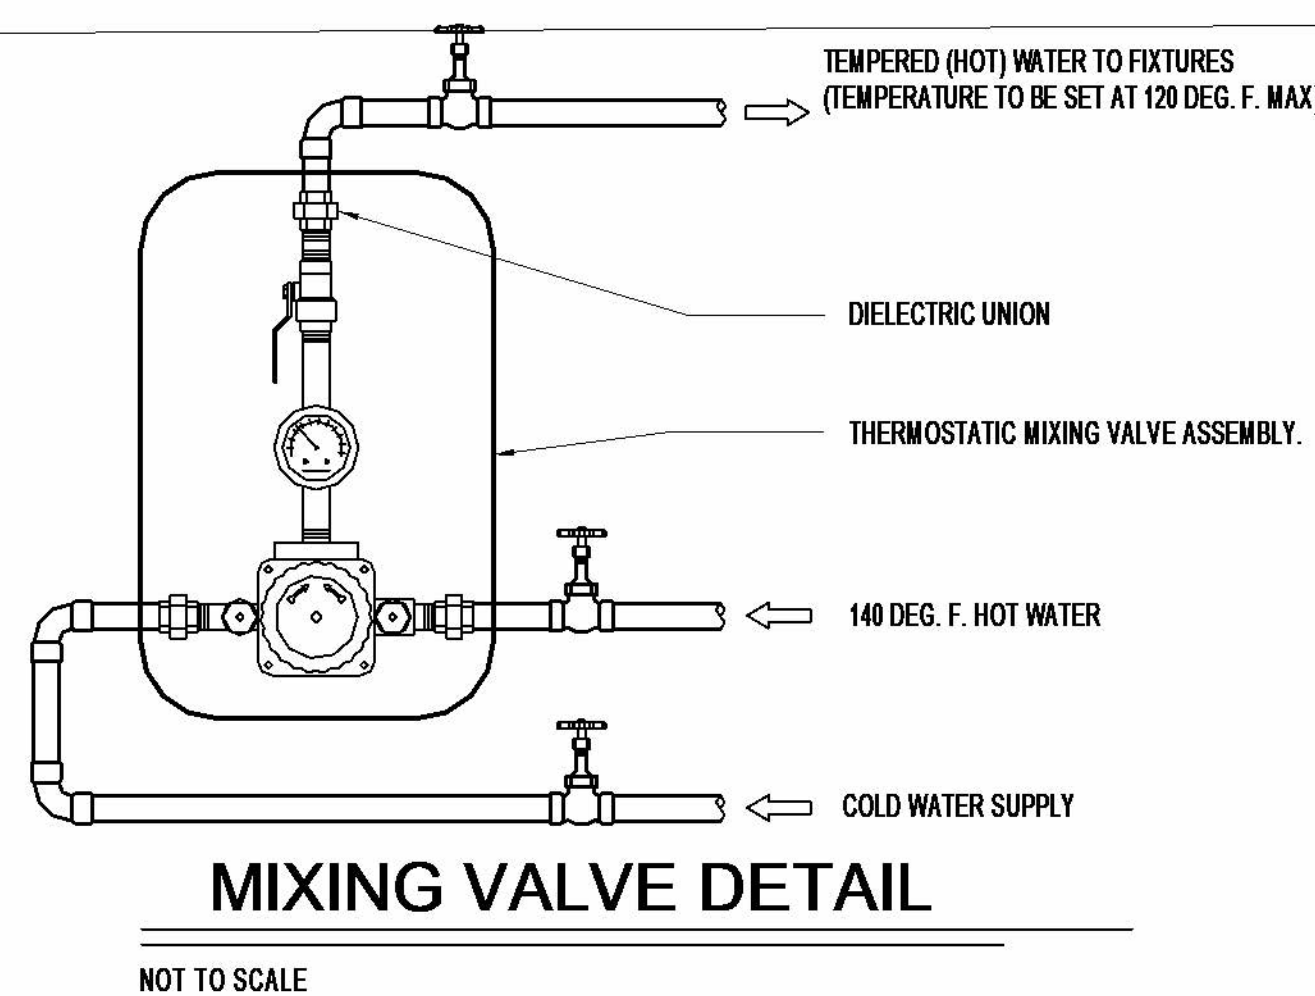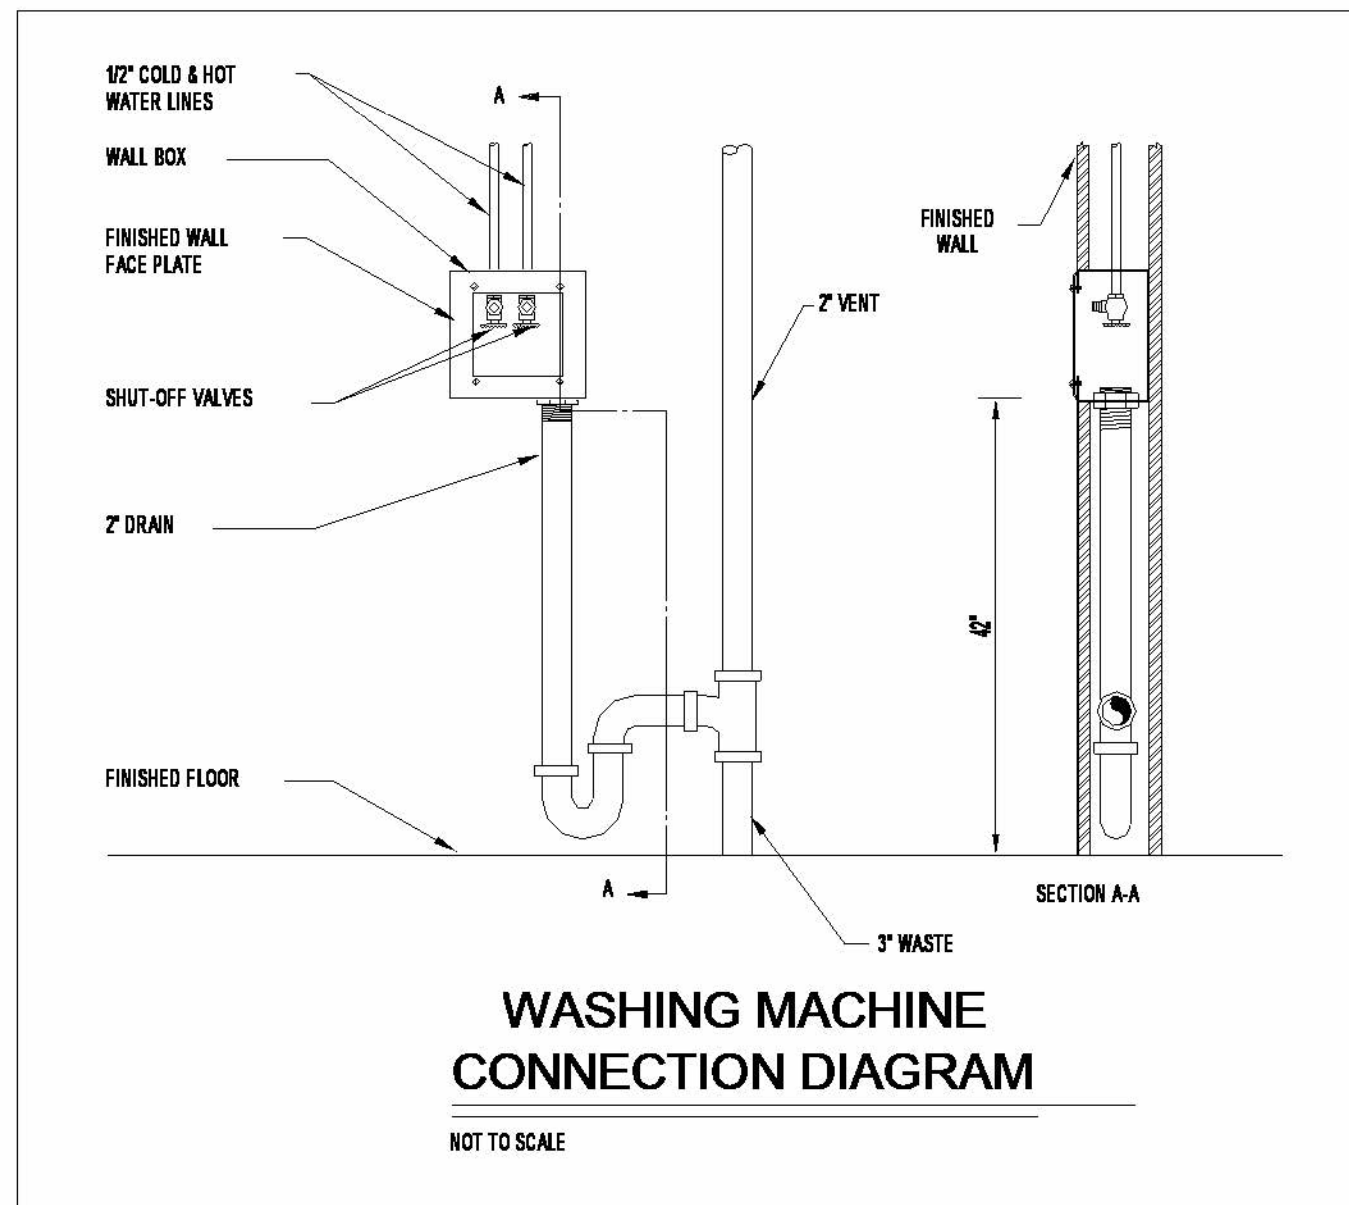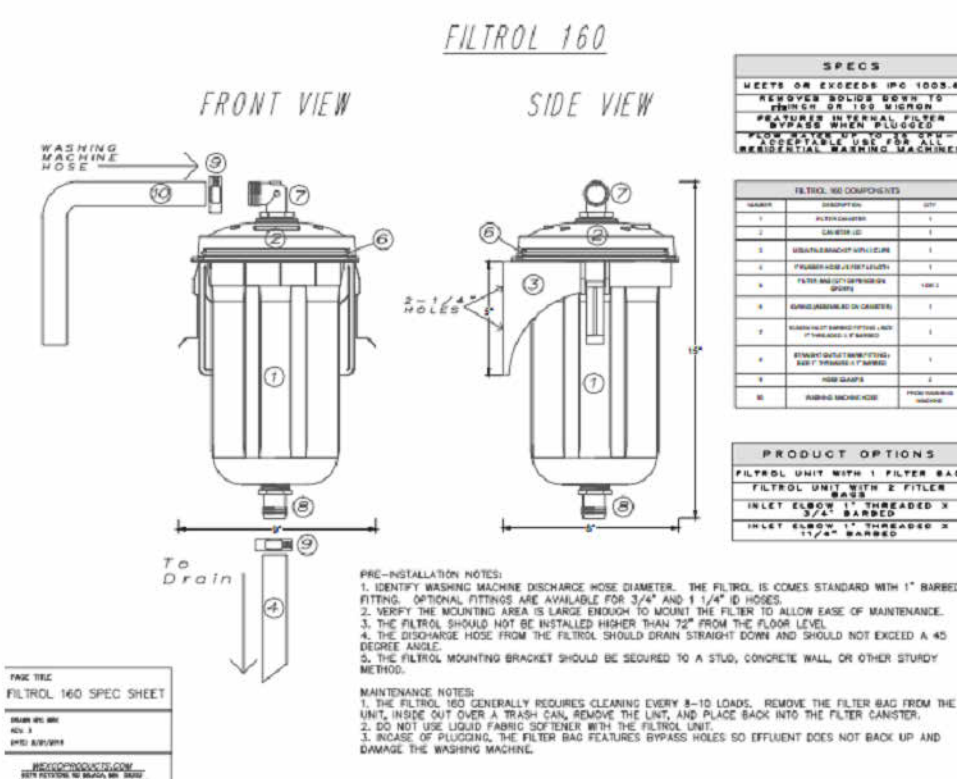

(STUDOR RED)-VENT OR EQ) AIR ADMITTANCE VALVE
THE VALVE SHOULD BE CONNECTED TO THE PIPING IN ACCORDANCE WITH THE MANUFACTURER'S INSTALLATION INSTRUCTIONS. THE VALVE SHOULD BE INSTALLED IN THE VERTICAL, UPRIGHT POSITION AFTER ROUGH-IN AND PRESSURE TESTING OF THE DWV SYSTEM. A MINIMUM OF ONE VENT SHALL EXTEND TO THE OPEN ATMOSPHERE FOR EVERY BUILDING DRAINAGE SYSTEM. THE VALVE SHOULD NOT BE INSTALLED AS A VENT TERMINAL FOR ANY SPECIAL (CHEMICAL) WASTE SYSTEM OR IN SUPPLY AND RETURN AIR PLENUMS.

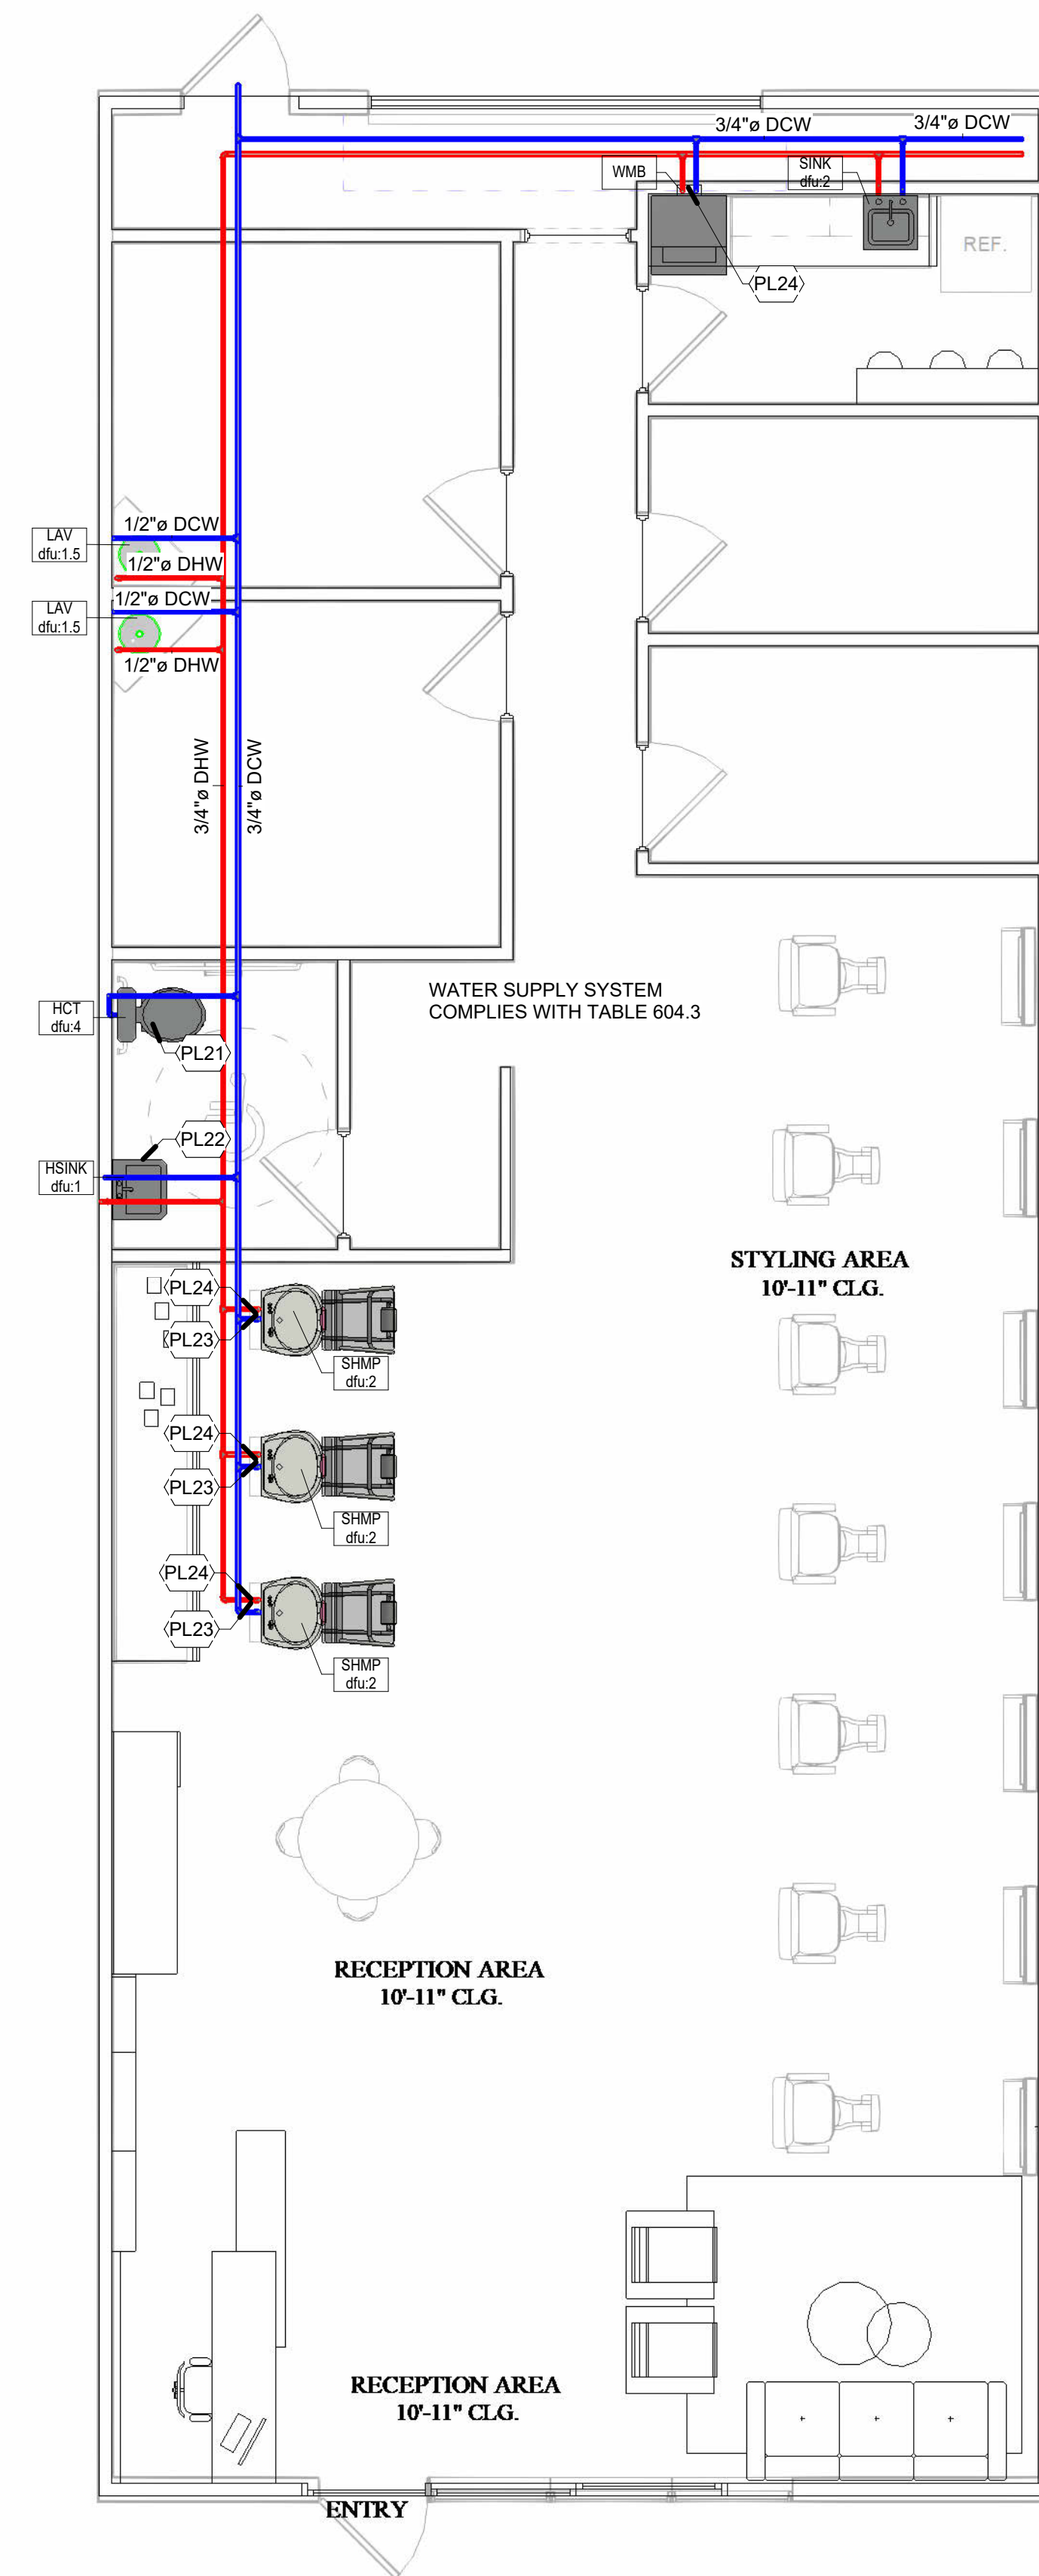

3 **PROPOSED WATER DISTRIBUTION PLAN**
P-1 **1/4" = 1'-0"**

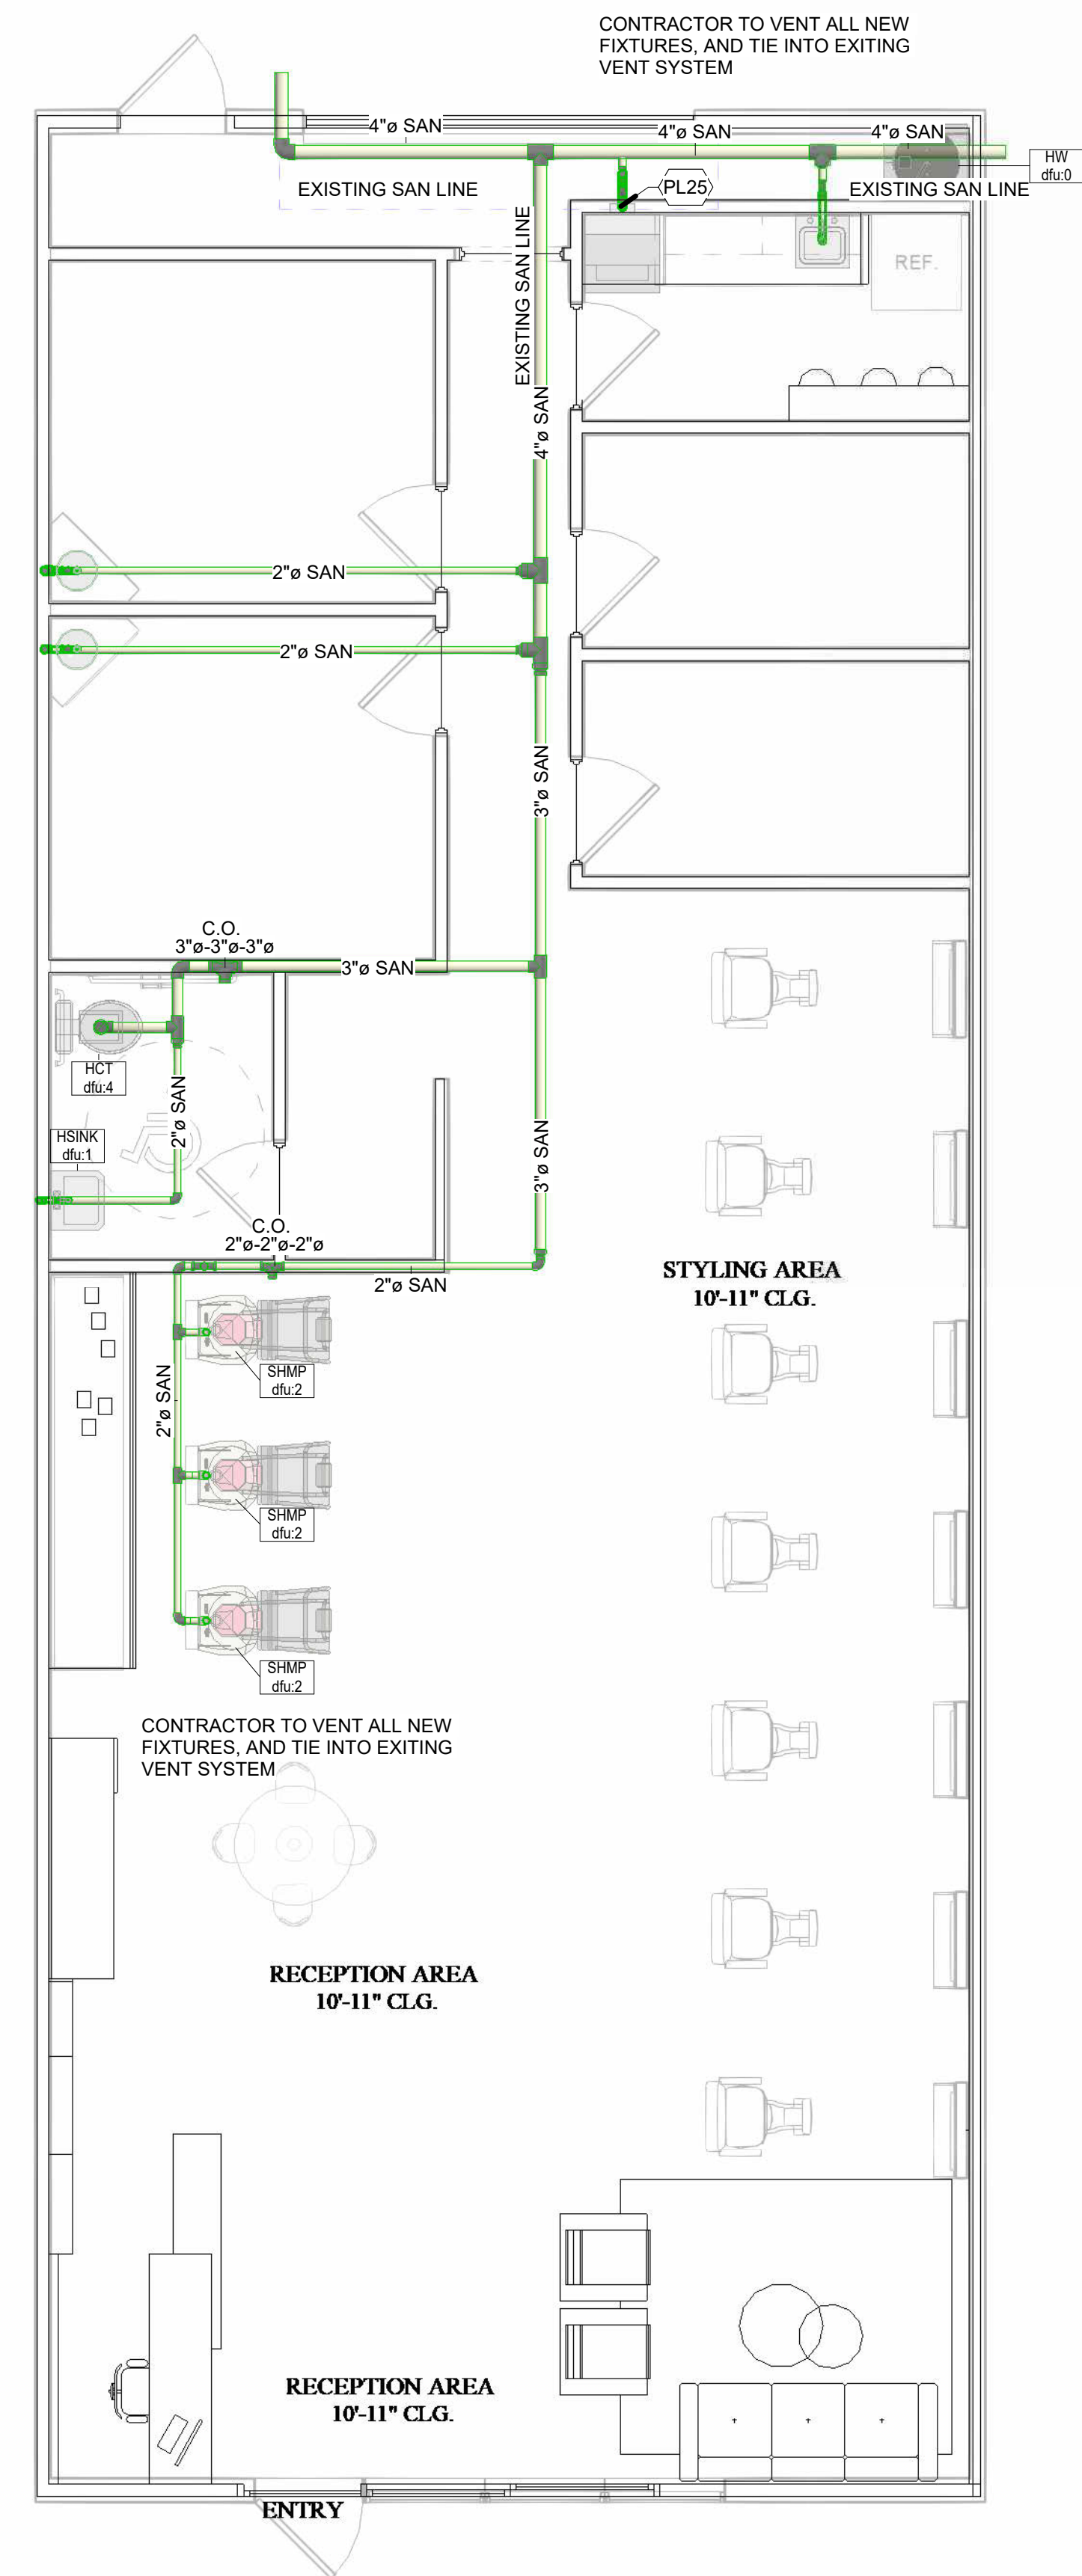

1 PROPOSED PLUMBING PLAN
P-1
1/4" = 1'-0"

USED FOR: *** FOR PERMIT ***

TRANSACTIONS		
NO.	DESCRIPTION	DATE

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

PROPOSED PLUMBING PLAN

SHEET: 3 of 18


SHEET NUMBER

D.1

MEING

PLAN KEYNOTES

Key Value	Keynote Text
-----------	--------------

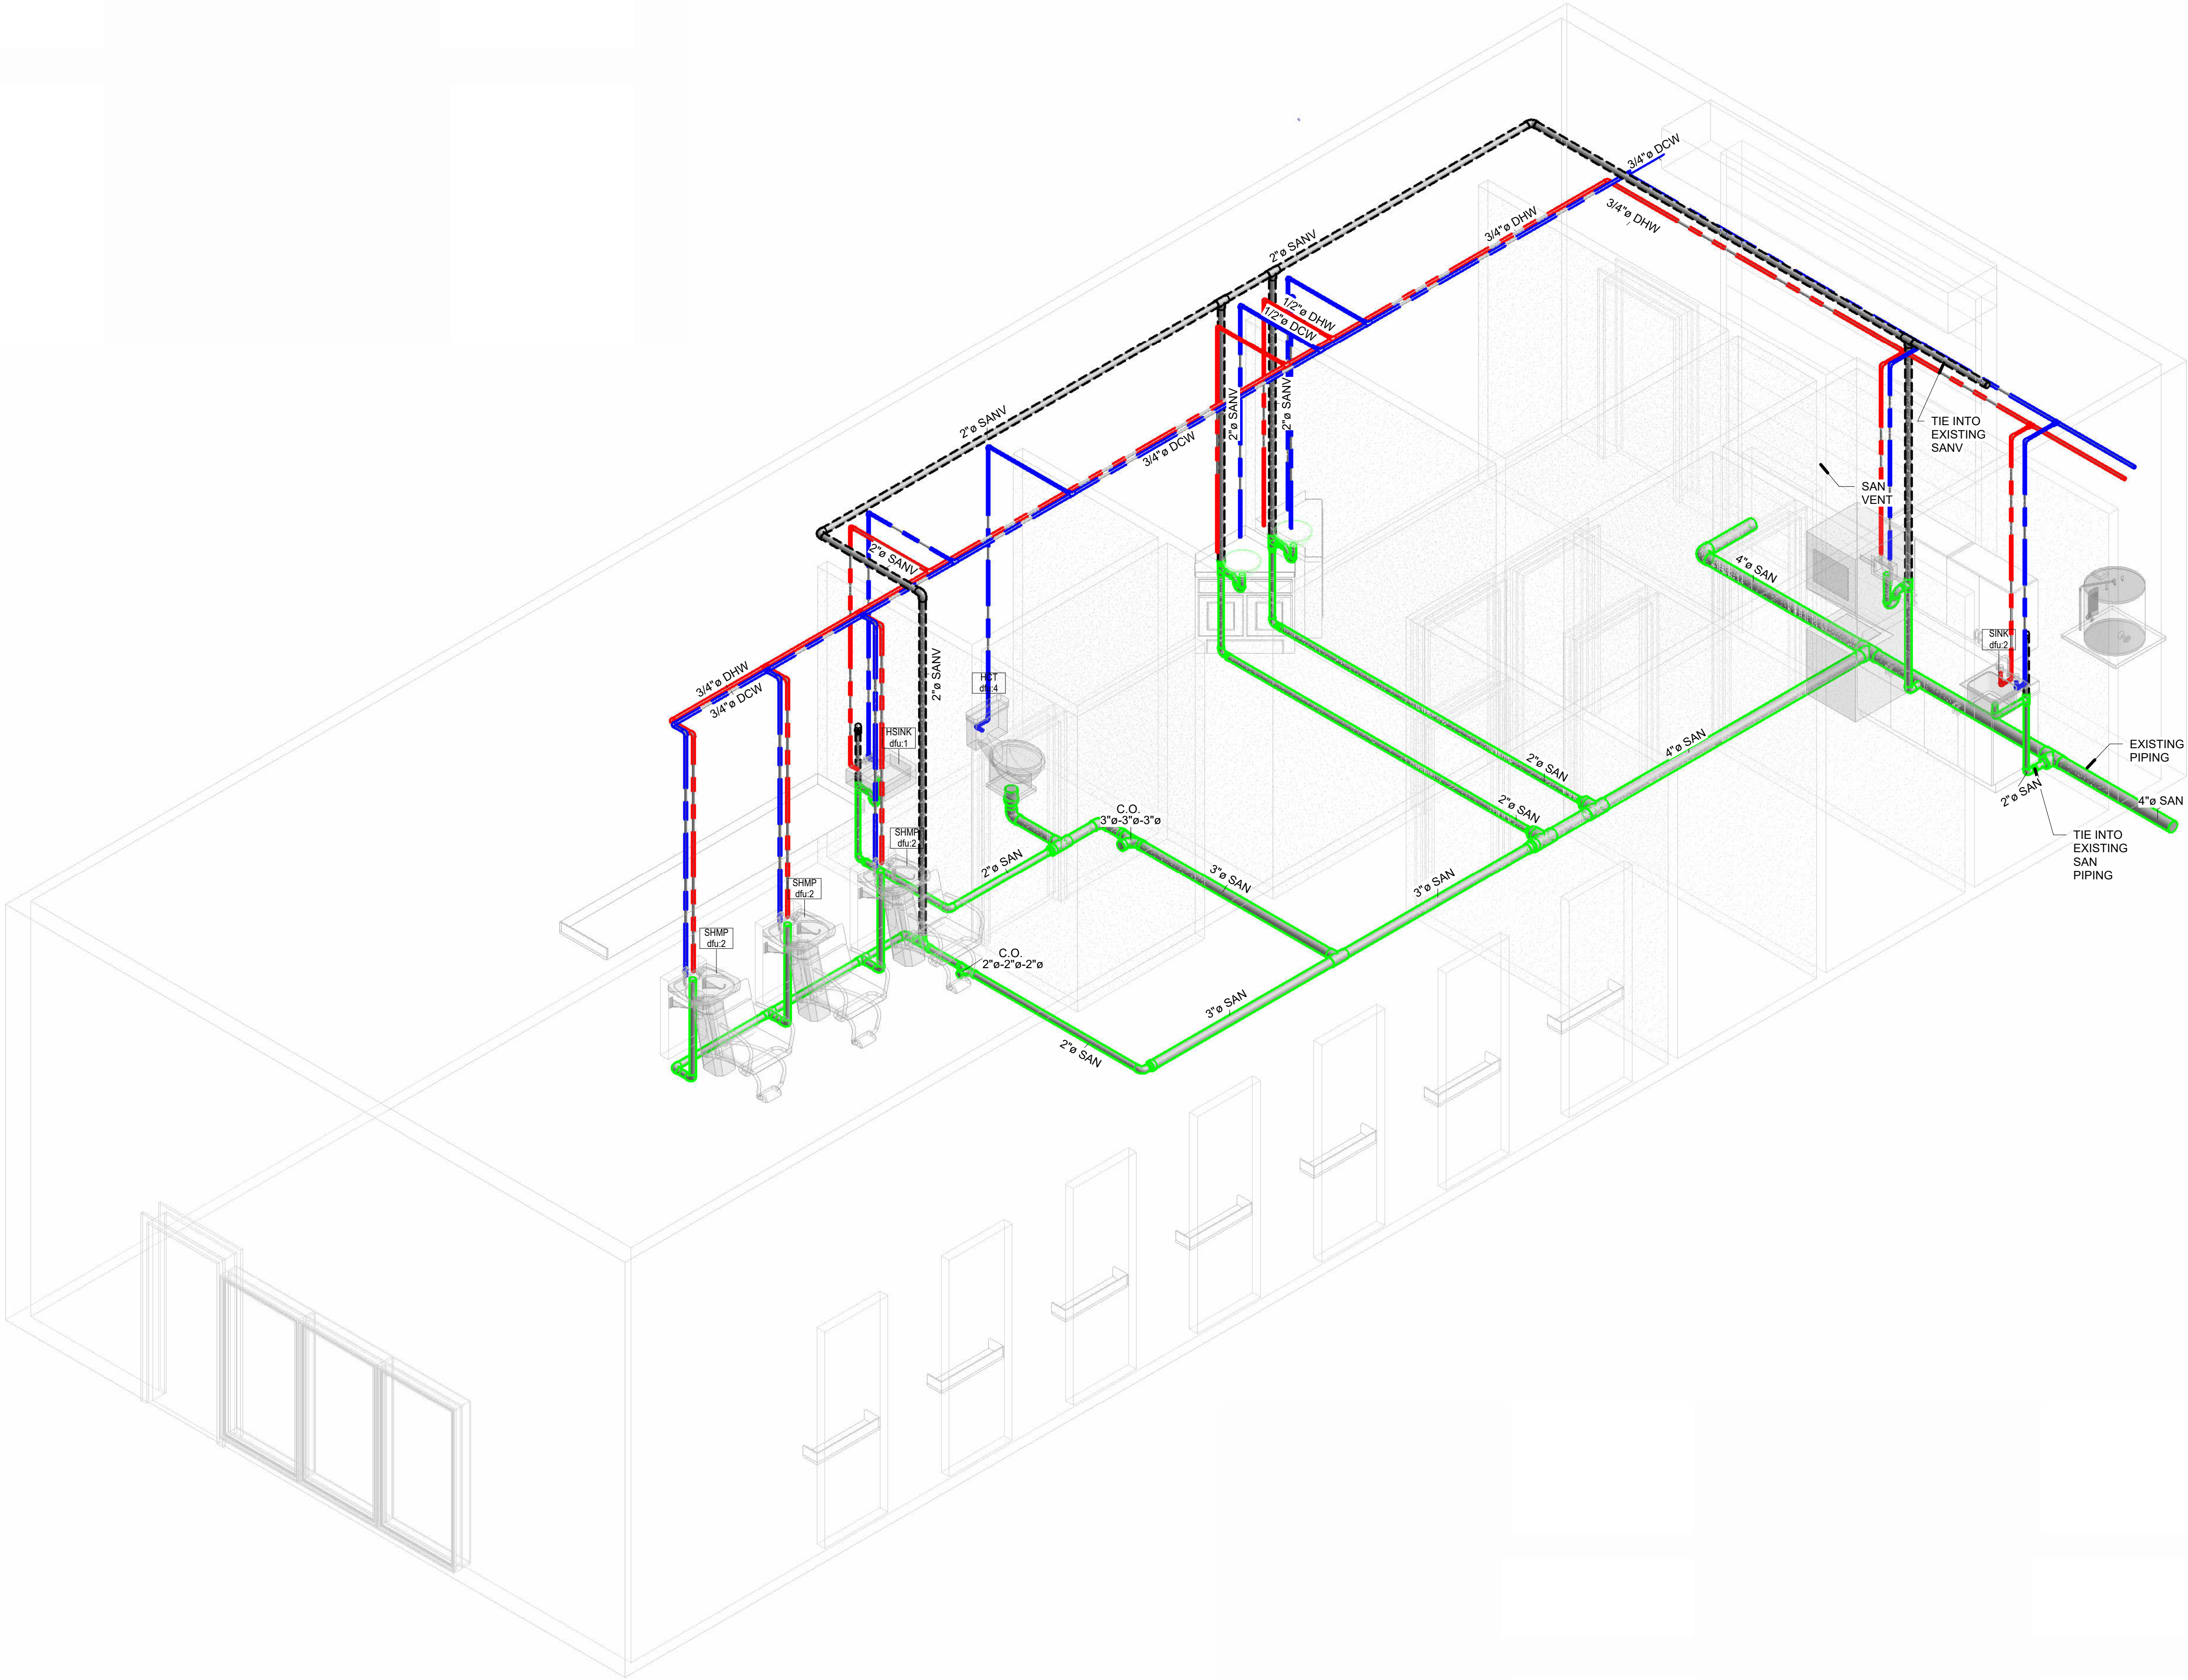

SEAL

ISSUED FOR: *** FOR PERMIT ***

REVISIONS		
NK	DESCRIPTION	DATE
No.	Description	Date

Project number: 22-2076
Project Issue Date: 04/01/2022
Project Status: FOR PERMIT

PROPOSED
PLUMBING
ISOMETRIC

SHEET: 4 of 18

SHEET NUMBER

P-2

4. PLUMBING

1 DRAINAGE ISOMETRIC

NOTE: THESE PLANS ARE SCHEMATIC IN NATURE, IF A DISCREPANCY EXIST BETWEEN THE PLANS AND THE ACTUAL FIELD CONDITIONS, THE CONTRACTOR IS TO NOTIFY THE OWNER WITHIN 10 (TEN) DAYS. AFTER 10 DAYS, THE CONTRACTOR IS RESPONSIBLE FOR THE PROJECT IN ITS ENTIRETY.